PHILIPS 28PT800B

MODEL

SERVICE MANUAL

Colour television Chassis

Service
Service
Service

FL 1.14 FL 2.14
FL 1.16 FL 2.16
FL 1.17

AA

ServiceManual

Contents

			Page
1.	Technical data		1
2.	Connection facilities		1
3.	Warnings and notes		2
4.	Mechanical instructions		2
5.	Block diagram		3
6.	Elektrical diagrams and PCB layouts		
	Power supply	(Diagram A)	3
	Tuner, Source selection	(Diagram C)	6
	Synchronisation & Deflection	(Diagram B)	7
	Video processing	(Diagram D)	10
	Sound processing	(Diagram F)	12
	Operation	(Diagram H)	14
	Picture tube panel	(Diagram E)	15
	Sound power Amplifier	(Diagram G)	15
	Y/C Detector	(Diagram I)	17
	SCAVEM filter	(Diagram Y)	17
	SCAVEM amplifier	(Diagram Z)	17
	NICAM module	(Diagram K)	19
	PIP module	(Diagram J)	20
	LFR Box (100 Hz, LFR)	(Diagram M)	21
	LFR Box (TXT)	(Diagram L)	22
	100 Hz/TXT (FLX.17)	(Diagram L')	23
7.	Elektrical settings		24
8.	List of error messages and repair tips		26
9.	Directions for use		28
10.	Elektrical parts list		30

ublished by Consumer Electronics Printed in The Netherlands ©Copyright reserved Subject to modification GB 4822 727 19919

1.Technical data

Mains voltage	: 220 - 240 V (± 10%)
	: 50 Hz - 60 Hz (± 5%)
Aerial input impedance	: 75 Ω - koaxial
Minimum aerial voltage	: 30 µV (VHF), 40 µV (UHF)
Maximum aerial voltage VHF/S/UHF	: 180 mV
Programmes	: 0 - 59
VCR programmes	: 0, 50 - 59

2.Connection facilities

pecification of the connectors

EXT1 (AUX): RGB+CVBS



1 -Audio ⊖→ R(0,5VRMS ≤ 1kΩ)
2 -Audio ⊕ R(0,5VRMS ≥ 10kΩ)
3 -Audio ⊖→ L(0,5VRMS ≤ 1kΩ)
4 -Audio ⊥
5 -Blue ⊥
6 -Audio ⊕ L(0,5VRMS ≥ 10kΩ)
7 -Blue (0,7Vpp/75Ω)
8 -CVBS-status ⊕ 0-2V: INT
4,5-7V: EXT 16:9
9,5-12V: EXT 4:3

9 -Green ⊥
10 --
11 -Green (0,7Vpp/75Ω)
12 --
13 -Red ⊥
14 -RGB-status
15 -Red (0,7Vpp/75Ω)
16 -RGB-status (0-0,4V: INT; 1-3V: EXT/75Ω)
17 -CVBS ⊥
18 -CVBS ⊥
19 -CVBS ⊖→ (1Vpp/75Ω)
20 -CVBS ⊕ (1Vpp/75Ω)
21 -Earthscreen

EXT2 (VCR): Y/C+CVBS



1 -Audio ⊖→ R(0,5VRMS ≤ 1kΩ)
2 -Audio ⊕ R(0,5VRMS ≥ 10kΩ)
3 -Audio ⊖→ L(0,5VRMS ≤ 1kΩ)
4 -Audio ⊥
5 -
6 -Audio ⊕ L(0,5VRMS ≥ 10kΩ)
7 --
8 -CVBS-status ⊕ 0-2V: int
4,5-7V: EXT 16:9
9,5-12V: EXT 4:3
⊕ 4,5 : EXT 16:9

9 --
10 --
11 --
12 --
13 -CHROMA ⊥
14 --
15 -CHROMA ⊕ (1Vpp/75Ω)
16 --
17 -CVBS ⊥
18 -CVBS ⊥
19 -CVBS ⊖→ (1Vpp/75Ω)
20 -CVBS/Y ⊕ (1Vpp/75Ω)
21 -Earthscreen

EXT3 (front)

SVHS

1 - ⊥
2 - ⊥
3 - Y ⊕ (1Vpp; 75Ω)
4 - C ⊕ (0,3Vpp; 75Ω)

◎ CINCH Video ⊕ 300mVpp/75Ω
◎ CINCH Audio ⊕ L(0,2 - 2VRMS; ≥ 10kΩ)
◎ CINCH Audio ⊕ R(0,2 - 2VRMS; ≥ 10kΩ)

3.5mm / 6.3mm 32-2000Ω ≥ 10mW

Audio out (rear)

◎ CINCH Audio ⊖→ L(0,5VRMS; ≤ 1kΩ)
◎ CINCH Audio ⊖→ R(0,5VRMS; ≤ 1kΩ)

front : 2 x 16W / 8Ω
rear : 2 x 6W / 8Ω

EXT2 (SVHS) (rear)

SVHS

1 - ⊥
2 - ⊥
3 - Y ⊕ (1Vpp; 75Ω)
4 - C ⊕ (0,3Vpp; 75Ω)

◎ CINCH Audio ⊕ L(0,2 - 2VRMS; ≥ 10kΩ)
◎ CINCH Audio ⊕ R(0,2 - 2VRMS; ≥ 10kΩ)

SVHS

1 - ⊥
2 - ⊥
3 - Y ⊖→ (1Vpp; 75Ω)
4 - C ⊖→ (0,3Vpp; 75Ω)

◎ CINCH Audio ⊖→ L(0,2 - 2VRMS; ≤ 1kΩ)
◎ CINCH Audio ⊖→ R(0,2 - 2VRMS; ≤ 1kΩ)

Warnings and Notes

Safety regulations require that the unit should be returned in its original condition and that components identical to the original components are used. The safety components are indicated by the symbol ⚠

In order to prevent damage to ICs and transistors, all high-voltage flashovers must be avoided. In order to prevent damage to the picture tube, the method shown in Fig. 3.1 should be used to discharge the picture tube. Use a high-voltage probe and a multimeter (position DC-V). Discharge until the meter reading is OV (after approx. 30s).

ESD

All ICs and many other semiconductors are sensitive to electrostatic discharges (ESD). Careless handling during repair can drastically shorten the life. Make sure that during repair you are connected by a pulse band with resistance to the same potential as the earth of the unit. Keep components and tools also at this same potential.

When repairing a unit, always connect it to the mains voltage via an isolating transformer.

Be careful when taking measurements in the high-voltage section and on the picture tube.

Never replace modules or other components while the unit is switched on.

It is recommended that safety goggles are worn when replacing the picture tube.

When making settings, use plastic rather than metal tools. This will prevent any short circuits and the danger of a circuit becoming unstable.

After repair the wiring should be fastened once more in the cable clamps for this purpose.

- In order to prevent measuring errors, the heat sinks should not be used as reference points for measurements. **The heat sink for the sound output amplifier is connected to the -11 volts.**

- On this unit the 140 volt supply voltage is not supplied via an interconnection on the deflection yoke to the line output transformer. When the deflection cable is detached, the +140 volt supply remains loaded. In order to unload the +140 volts, coil 5511 should be removed.

- Together with the deflection unit and any multipole unit, the flat square picture tubes used form an integrated unit. The deflection and the multipole units are set optimally at the factory. Adjustment of this unit during repair is therefore not recommended.

1. The direct voltages and oscillograms should be measured with regard to the tuner earth (⊥), or hot earth (⊥ϟ) as this is called.

2. The direct voltages and oscillograms shown in the diagrams should be measured in the **Service Default Mode** (see chapter 8) with a colour bar signal and stereo sound (L: 3 kHz, R: 1 kHz unless stated otherwise) and picture carrier at 475.25 MHz.

3. Where necessary, the oscillograms and direct voltages are measured with (⊓⊓) and without aerial signal (⋊) Voltages in the power supply section are measured both for normal operation (⏀) and in standby (⏻). These values are indicated by means of the appropriate symbols.

4. The picture tube PCB has printed spark gaps. Each spark gap is connected between an electrode of the picture tube and the Aquadag coating.

5. The semiconductors indicated in the circuit diagram and in the parts lists are completely interchangeable per position with the semiconductors in the unit, irrespective of the type indication on these semiconductors.

6. The connectors used for the modules (board to board) are gold-plated and should only be replaced by the same type.

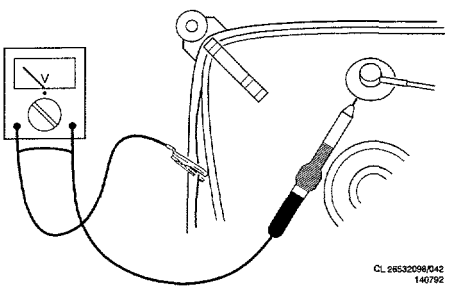

Fig. 3.1

4. M

It is
cabl
that
guar

1. Moc

FL





2. Rem

Befor
subw
FL1:(
subw
FL2:F
fixed.
so th
the re
arrow
Disco
arrow
prese
Remc



4. Mechanical instructions

It is extremely important that following disassembly all cables are replaced in their original positions in order that safety and sound and picture quality may be guaranteed.

1. Model overview (fig.1)

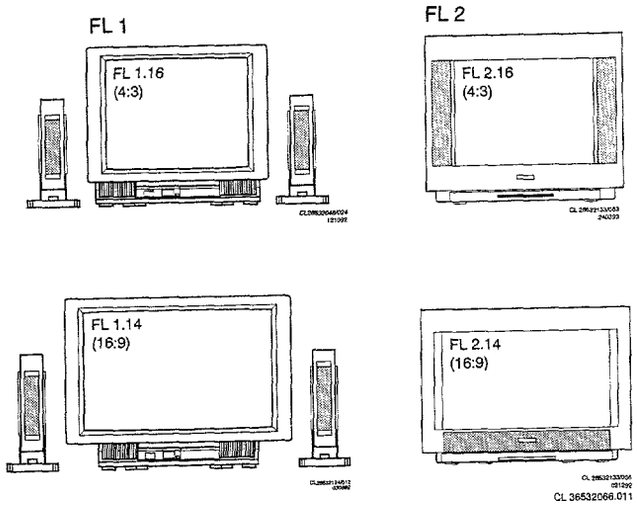

Fig.1

2. Removing the rear panel (fig.2 + 3)

Before the rear panel is removed the connection to the subwoofer should first be disconnected:
FL1:Open the flap in the rear panel. Disconnect the subwoofer cable. (connector L36)
FL2:Remove the three screws A with which the grille is fixed. Tap the grille downwards as indicated by arrow 1, so that the grille becomes loose. Remove the grille from the rear panel by pulling it in the direction indicated by arrow 2.
Disconnect the cable from the subwoofer as indicated by arrow 3. Remove screws B and C, and also screws D if present.
Remove the rear panel from the set.

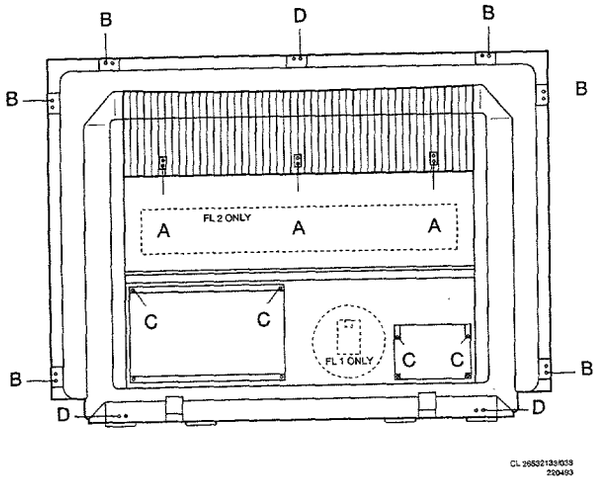

Fig.2

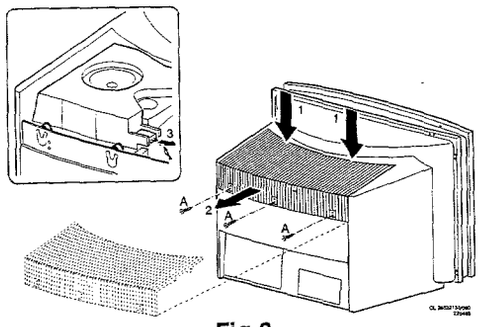

Fig.3

3. Service positions FL1

FL1 can be placed in two service positions. (Fig.4)
Remove the rear panel.
Remove the screw behind the flap on the front side of the set.

Service position 1:

If present, press down the lugs with which the chassis is secured and pull both panels simultaneously to the rear, removing any hindering cables from the cable ties if necessary.
Place the panels vertically behind the set as illustrated in figure 4a.

Service position 2:

Disconnect connectors L01, L02 and L03 that connect the small (SSP) and large signal panel (LSP) together. Pull the panel concerned backwards out of the set. Using extension cable set 4822 320 20209 (fig.5) reconnect both panels together. Place the panel concerned behind the set as illustrated in figure 4b.

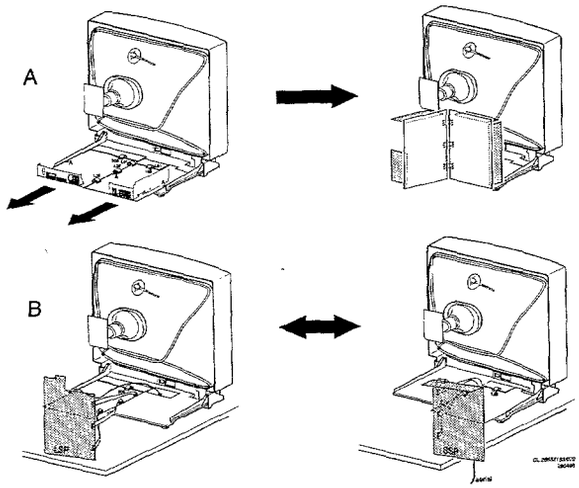

Fig.4

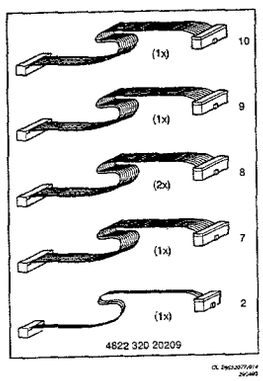

Fig.5

4. Service positions FL2

FL2 can be placed in two service positions. (fig.6)
Remove the rear panel.

Service position 1:

Disconnect connectors E47 and E48. These connectors are located on the side of the set and connect the chassis with the audio, video and headphone connections (FRONT).
Lift the chassis frame at the rear and remove it from the cabinet, removing any hindering cables from the cable ties if necessary. Place the frame one position to the rear, taking care to ensure that the chassis frame lugs are located into the correct recesses.

Service position 2:

Place the chassis in service position 1.
Click the infra-red receiver (IR) out of the retainer located under the picture tube.
Remove the cables to the panel with buttons for local operation from their ties and then click the operating panel out of its holder.
Disconnect the cable to the degaussing coil on the picture tube from the mains filter panel. Remove the cables from and to the mains filter from their cable ties. Click the two service legs loose and place them vertically in the holes as indicated in the diagram. Tilt the entire chassis frame and place the entire unit on both service legs so that the solder side is accessible.

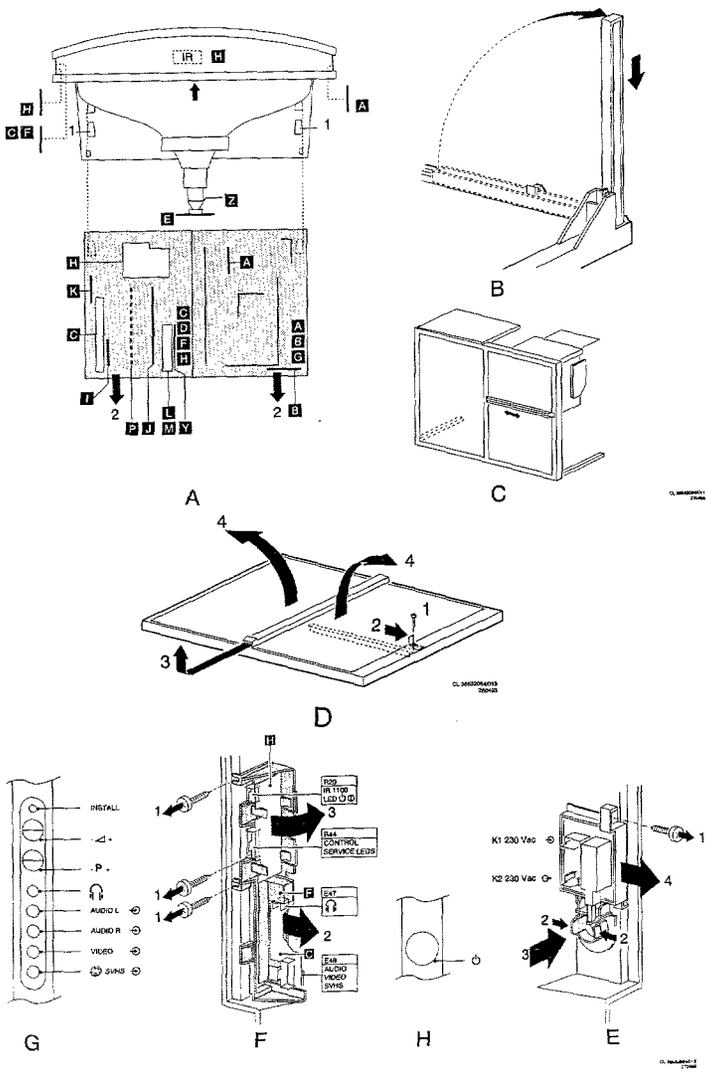

Fig.6

5. Removing the mask from FL2 (fig.7)

Remove the rear panel.
Remove the chassis frame with the chassis from the cabinet.
Remove screws E as indicated in the diagram. Loosen the snap connection under the picture tube. Remove the masker in the manner illustrated in the diagram.

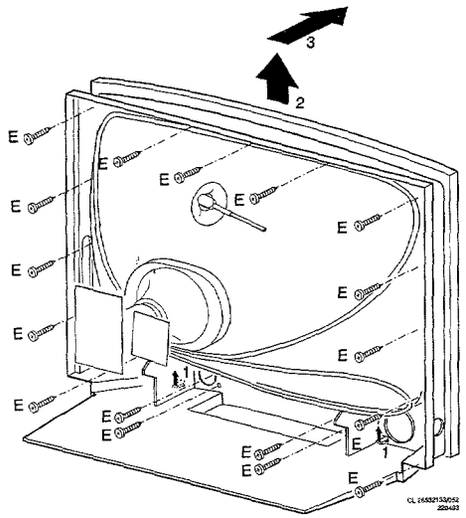

Fig.7

6. Replacing the picture tube.

Remove the rear panel.
Discharge the picture tube in the manner described in chapter 3.
Remove the chassis, or the chassis with the chassis frame from the cabinet.
Disconnect all cabling to the picture tube.
Tilt the set so that the front of the picture tube is pointing downwards, taking care that the picture tube comes to rest on a soft and clean surface.
Loosen the four bolt on the picture tube corners and drop the cabinet gently down onto the work surface. The picture tube can now be removed from the cabinet.

In FL2 special nylon picture tube tubular rivets have been applied. In order to guarantee optimum strength these should not be re-used. Take care to fit correctly when replacing.
Tighten the picture tube screws one-by-one until a torque of approximately 1kgm (10Nm) is achieved.
The picture tube tubular rivets are obtainable under code numbers:
For 28" picture tubes and smaller:4822 532 12243 (28")
For 29" picture tubes and larger:4822 404 31294 (28")
Four tubular rivets are required per picture tube.

Blockdiagram / Blockschaltbild /

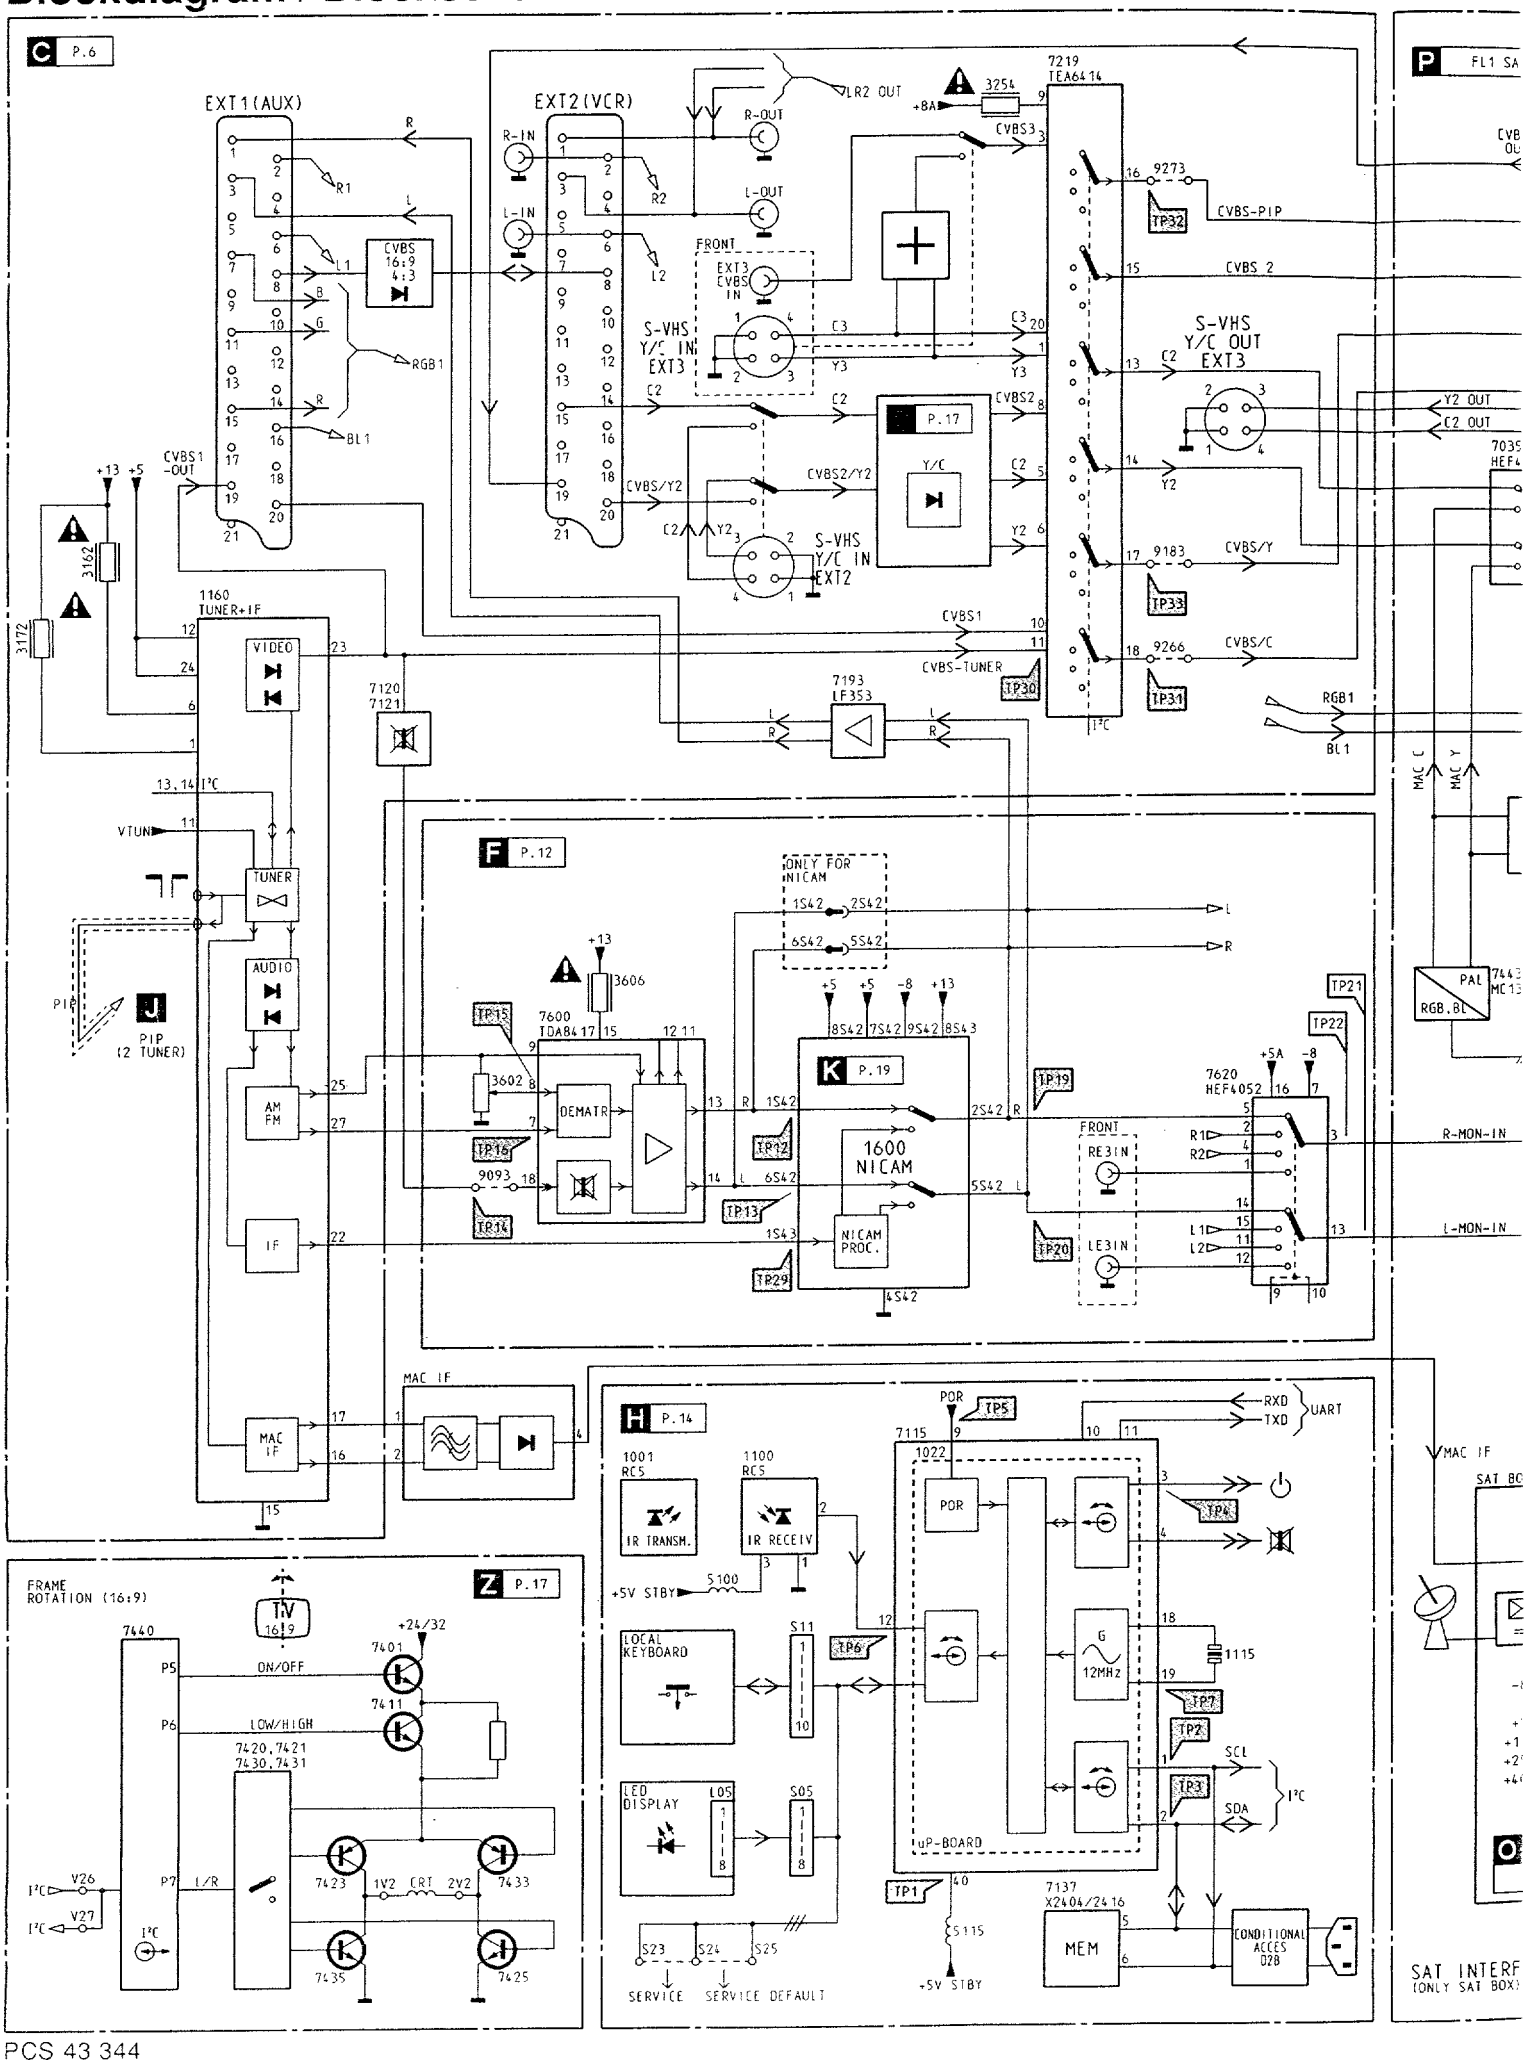

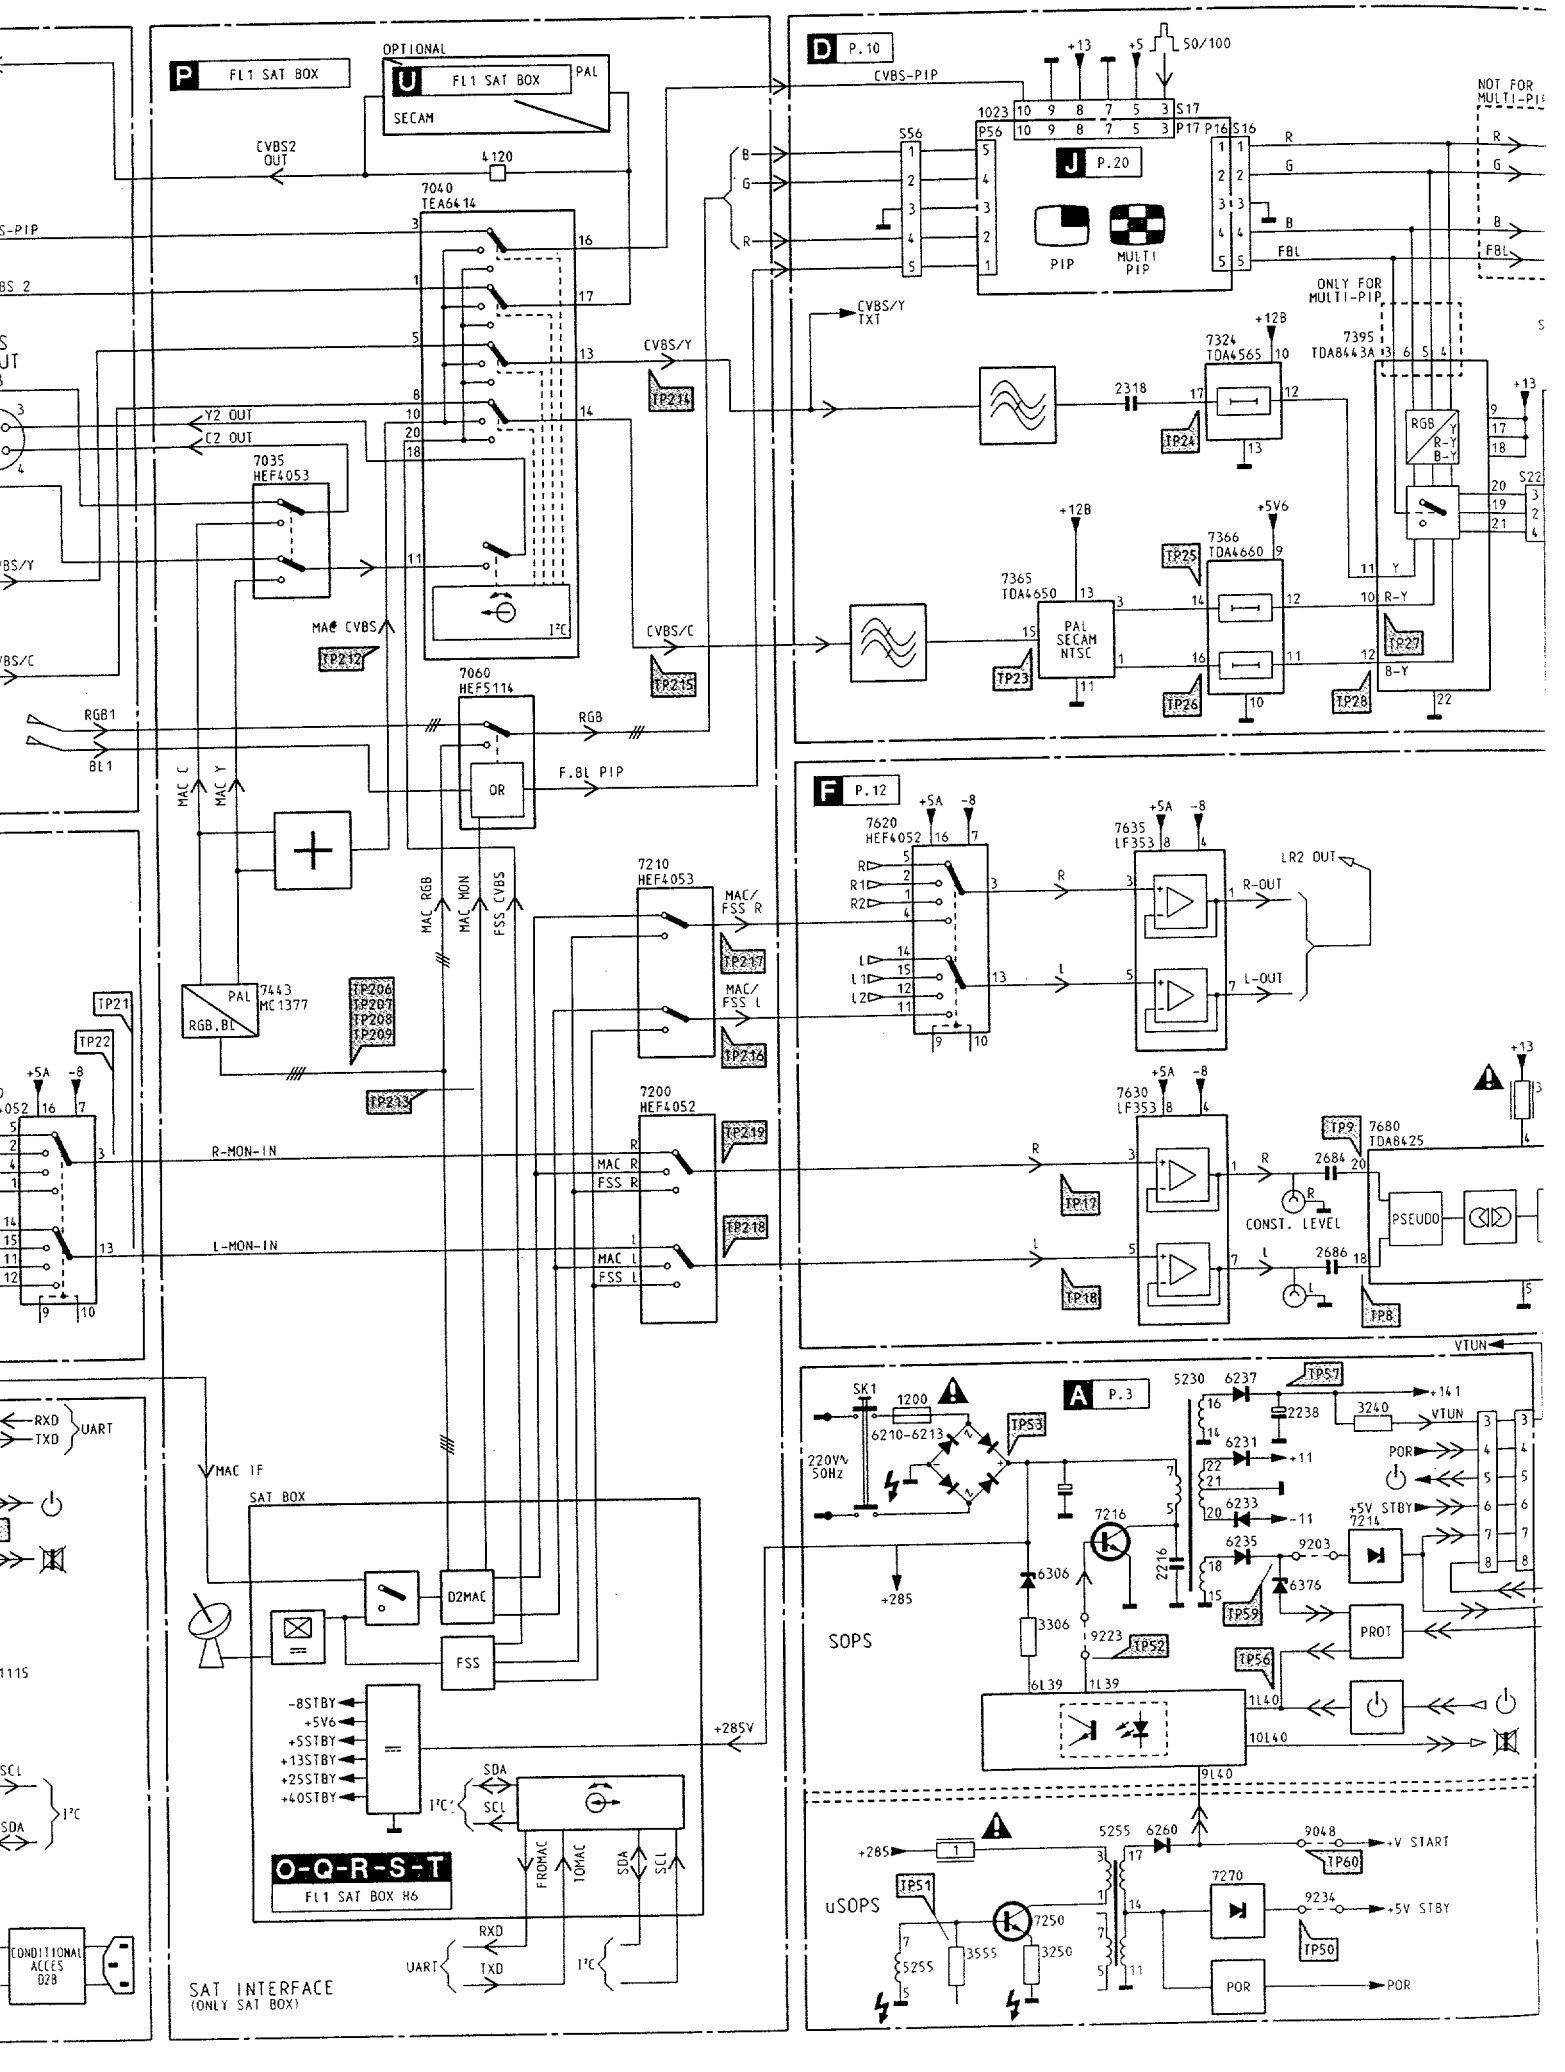
P FL1 SAT BOX
OPTIONAL
U FL1 SAT BOX PAL SECAM
CVBS2 OUT
4120
7040 TEA6414
Y2 OUT
C2 OUT
7035 HEF4053
MAC CVBS
TP212
7060 HEF5114
RGB1
BL1
RGB
F.BL PIP
OR
MAC C
MAC Y
MAC RGB
MAC MON
FSS CVBS
7210 HEF4053
MAC/ FSS R
MAC/ FSS L
TP217
TP216
7200 HEF4052
MAC R
FSS R
MAC L
FSS L
TP219
TP218
TP213
PAL 7443 MC1377 RGB,BL
TP206 TP207 TP208 TP209
TP21
TP22
R-MON-IN
L-MON-IN
CVBS/Y
CVBS/C
TP214
TP215
D P.10
CVBS-PIP
S56
P56
1023
S17
P17
P16
S16
J P.20
PIP
MULTI PIP
NOT FOR MULTI-PIP
ONLY FOR MULTI-PIP
CVBS/Y TXT
7324 TDA4565
7395 TDA8443A
2318
TP24
7365 TDA4650
PAL SECAM NTSC
7366 TDA4660
TP23
TP25
TP26
TP27
TP28
R-Y
B-Y
F P.12
7620 HEF4052
7635 LF353
LR2 OUT
R-OUT
L-OUT
7630 LF353
TP17
TP18
TP9
7680 TDA8425
2684
2686
CONST. LEVEL
PSEUDO
TP8
A P.3
SK1
1200
6210-6213
220VAC 50Hz
TP53
TP57
5230
6237
2238
3240
VTUN
6231
6233
6235
6376
9203
7214
+5V STBY
POR
7216
2216
6306
3306
9223
TP52
TP59
TP56
PROT
SOPS
+285
6L39
1L39
1L40
10L40
9L40
uSOPS
TP51
7250
3555
3250
5255
5260
9048
TP60
+V START
7270
9234
TP50
+5V STBY
SAT BOX
MAC IF
D2MAC
FSS
-8STBY
+5V6
+5STBY
+13STBY
+25STBY
+40STBY
+285V
O-Q-R-S-T
FL1 SAT BOX H6
FROMAC
TOMAC
SDA
SCL
RXD
TXD
UART
I²C
SAT INTERFACE
(ONLY SAT BOX)
CONDITIONAL ACCES D2B

Diagramme schématique

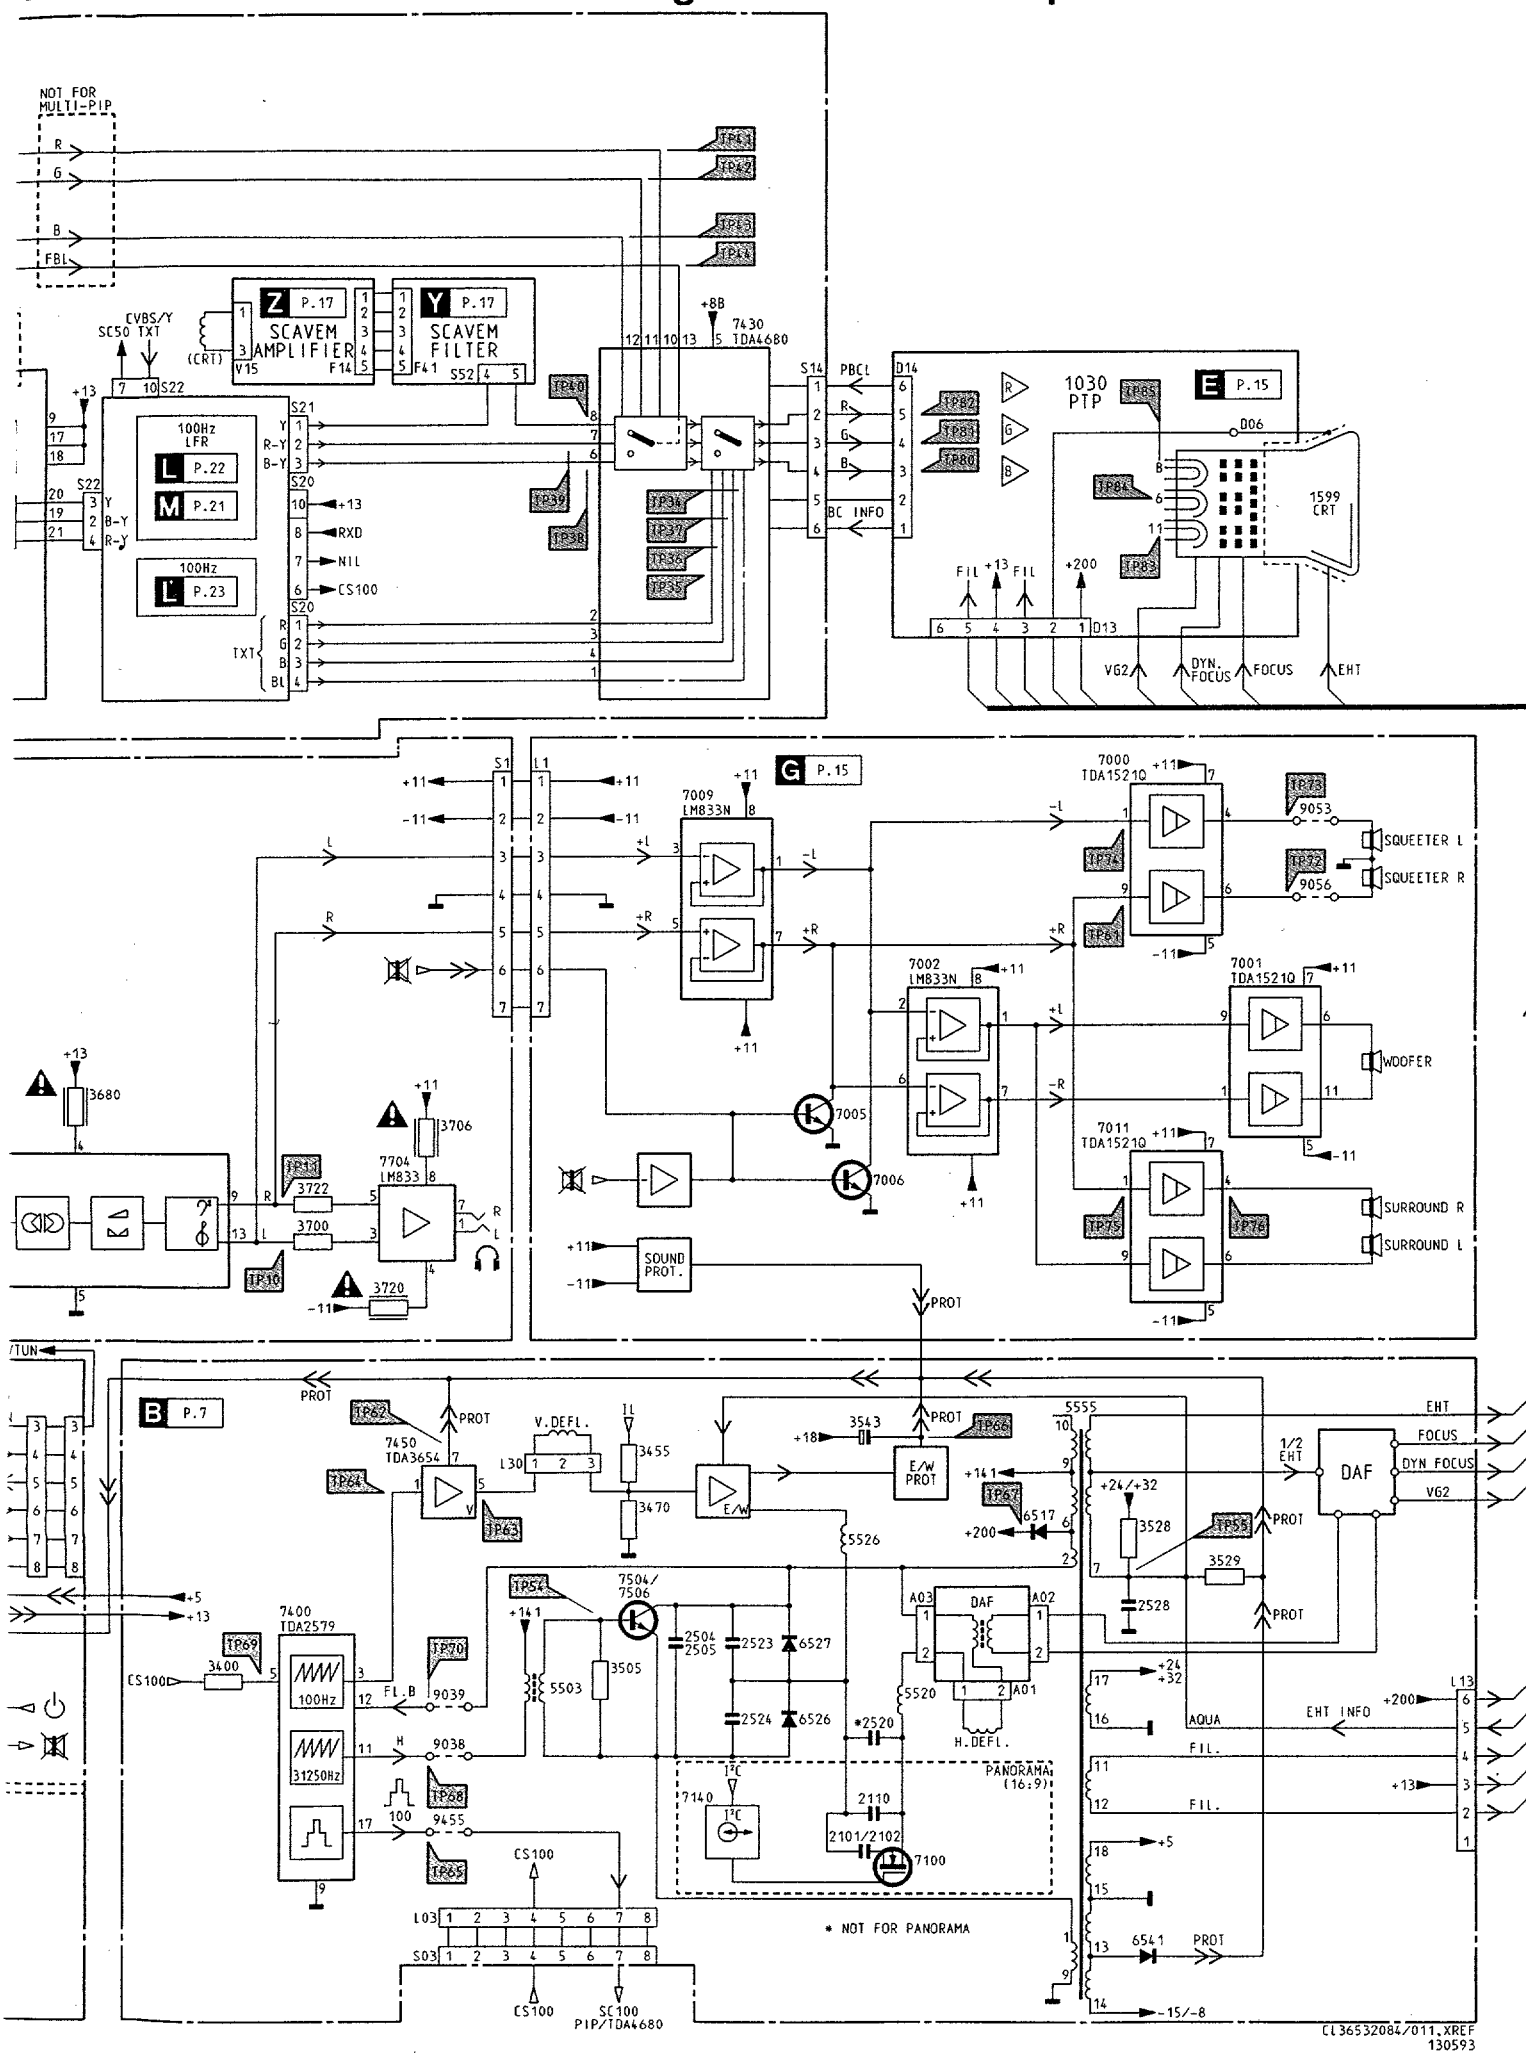

Small signal panel / Klein-signal Platte / Platine à petite signeaux

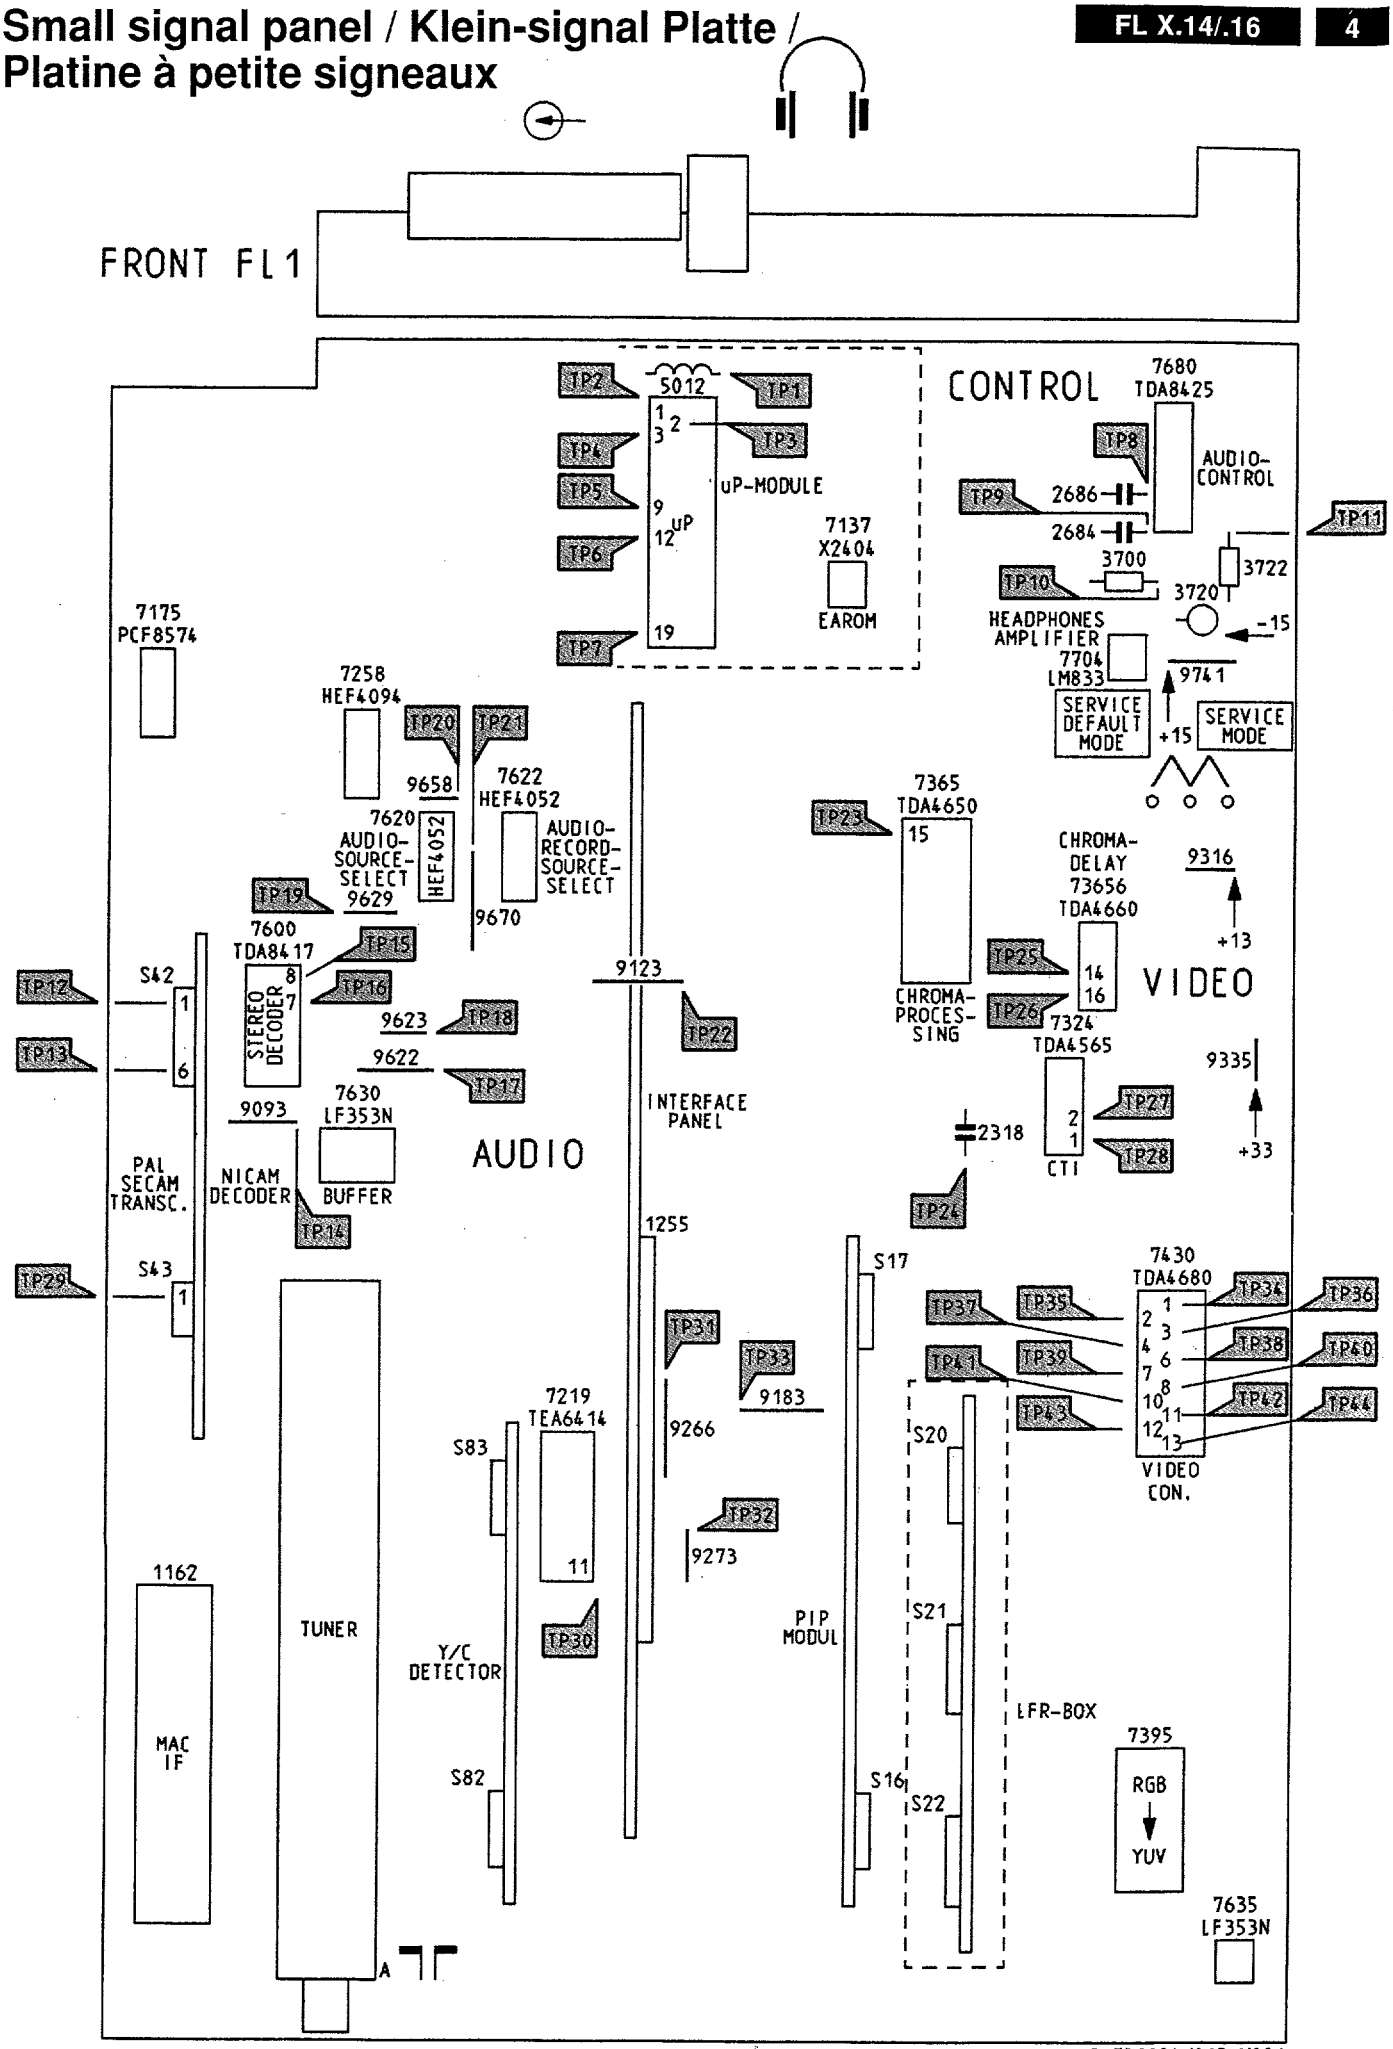

36532084/013,X001
130593

Large signal panel / Groß-signal Platte / Platine forts signeaux

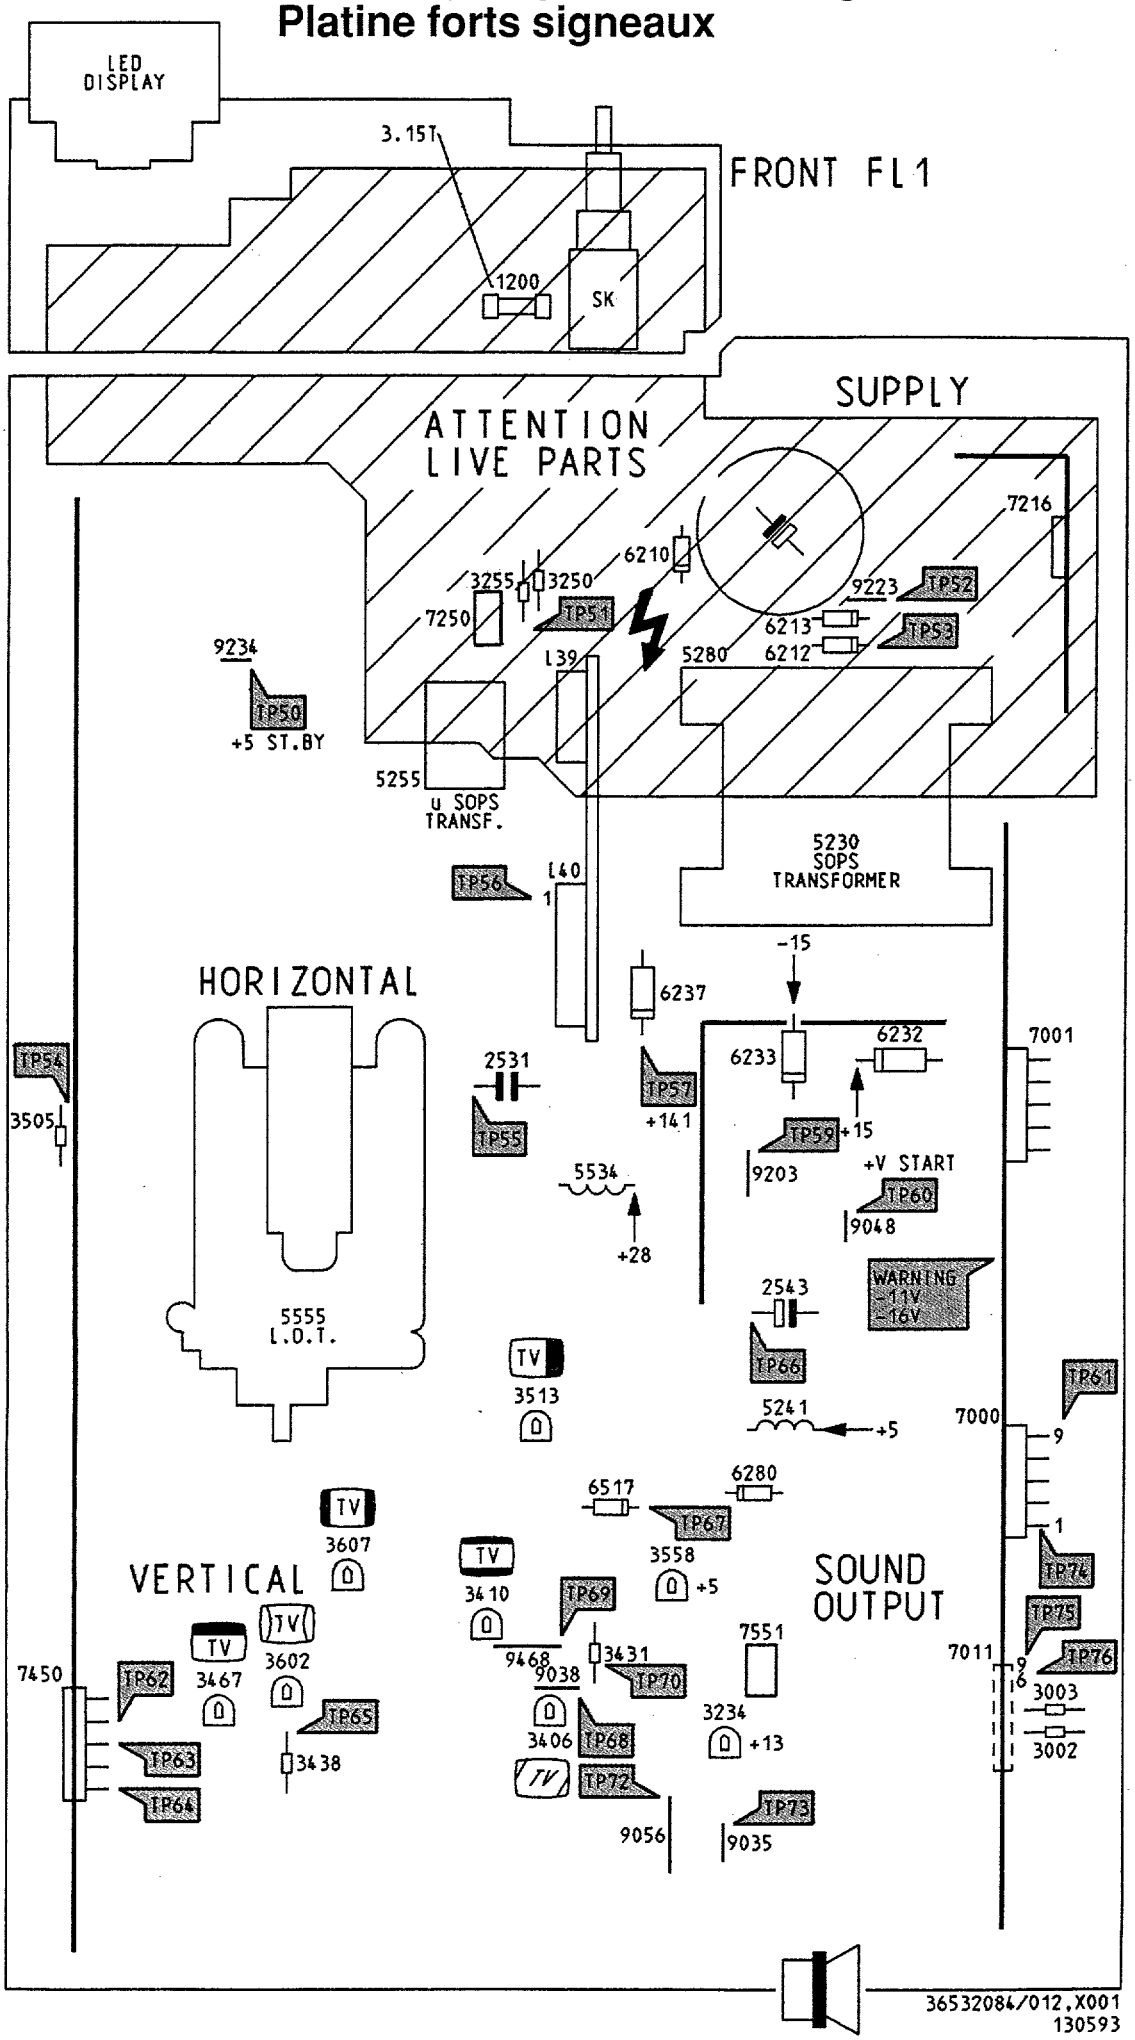

Oscillograms / Oscillogrammes

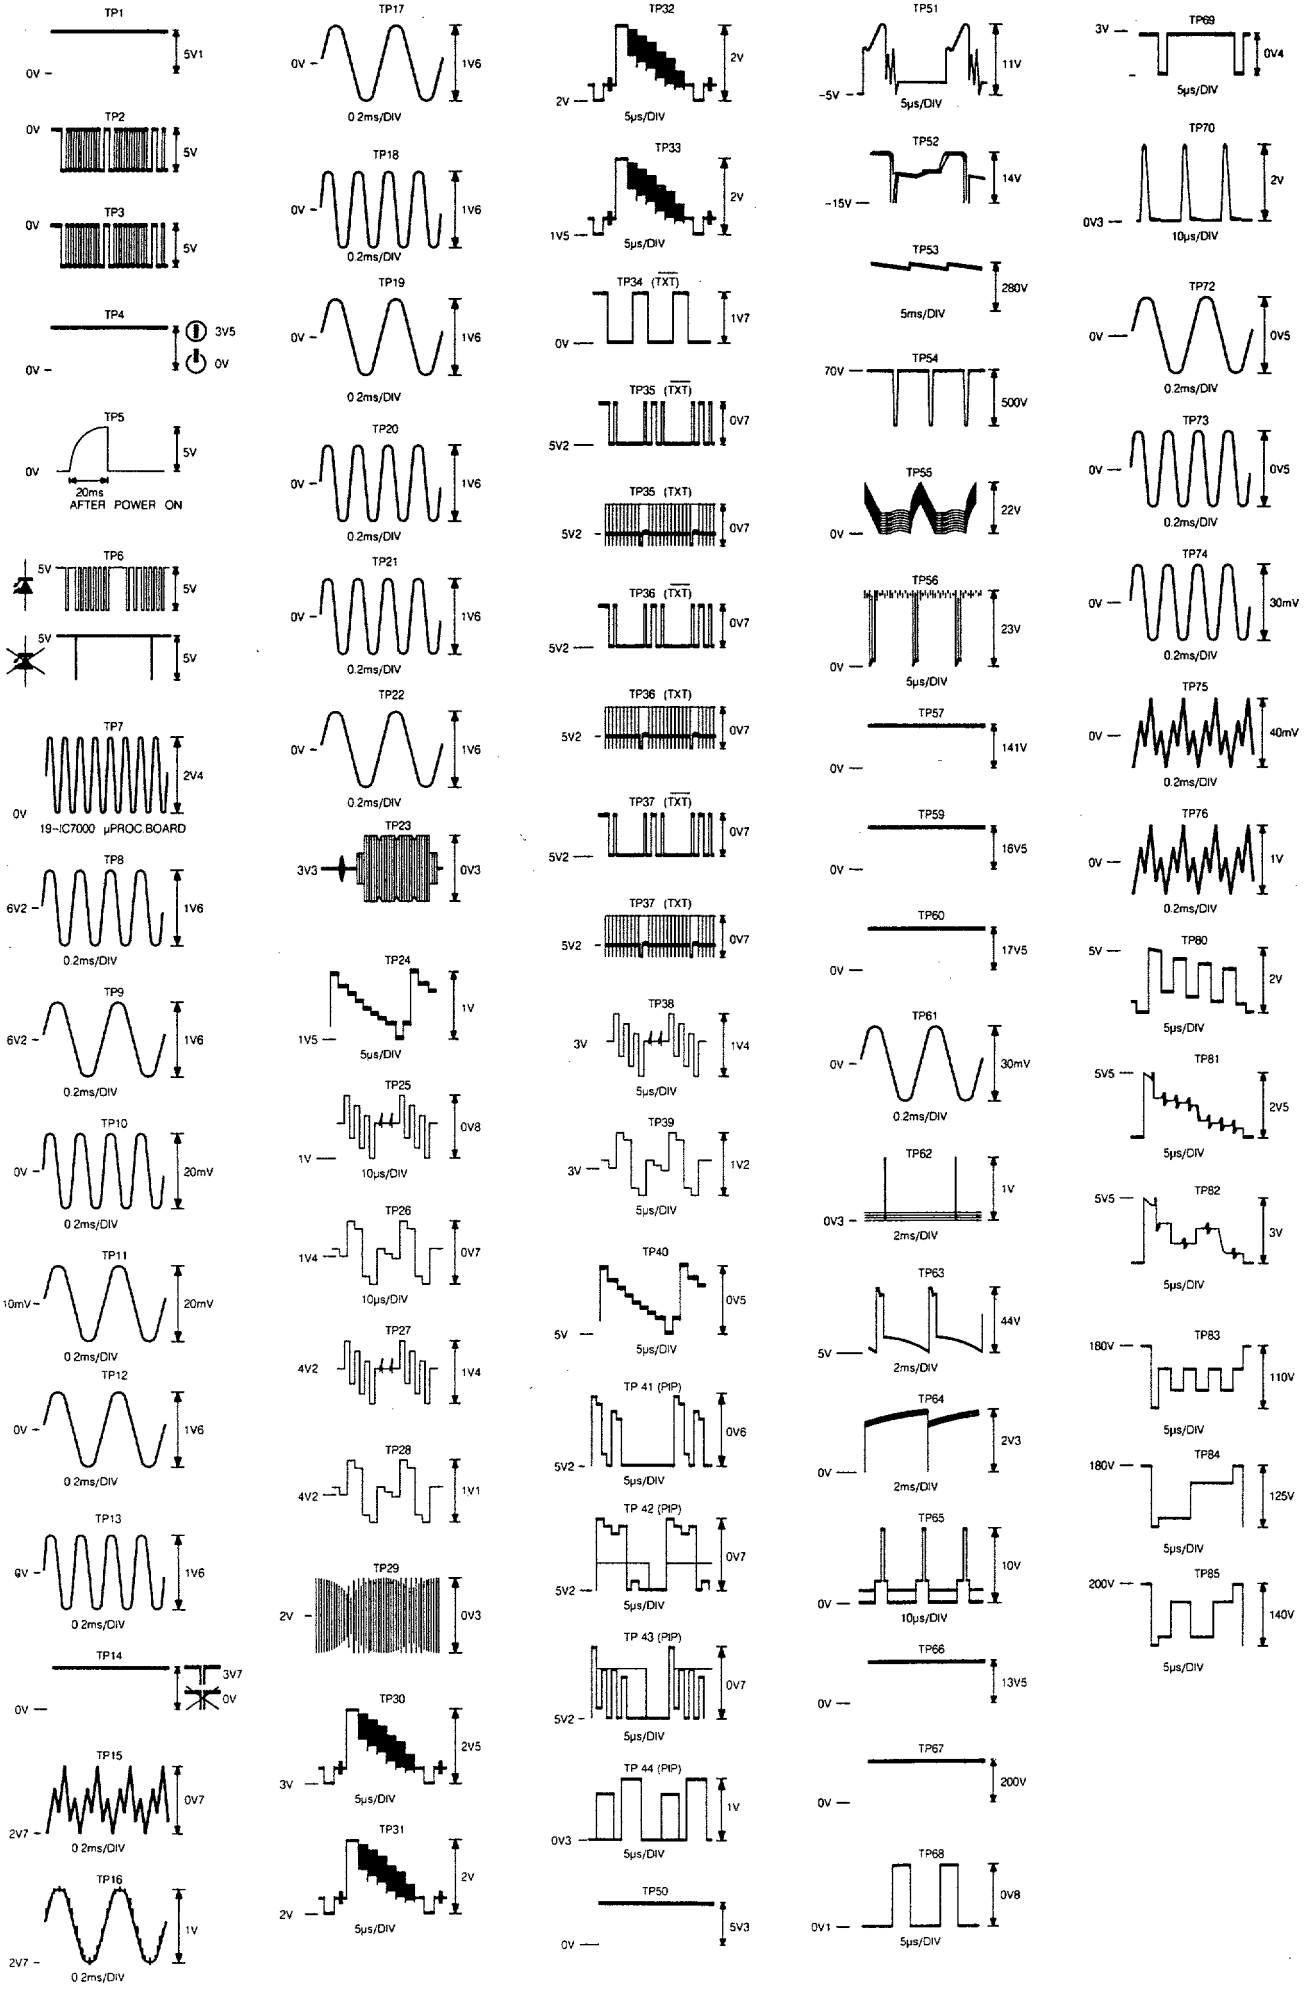

Oscillogrammes

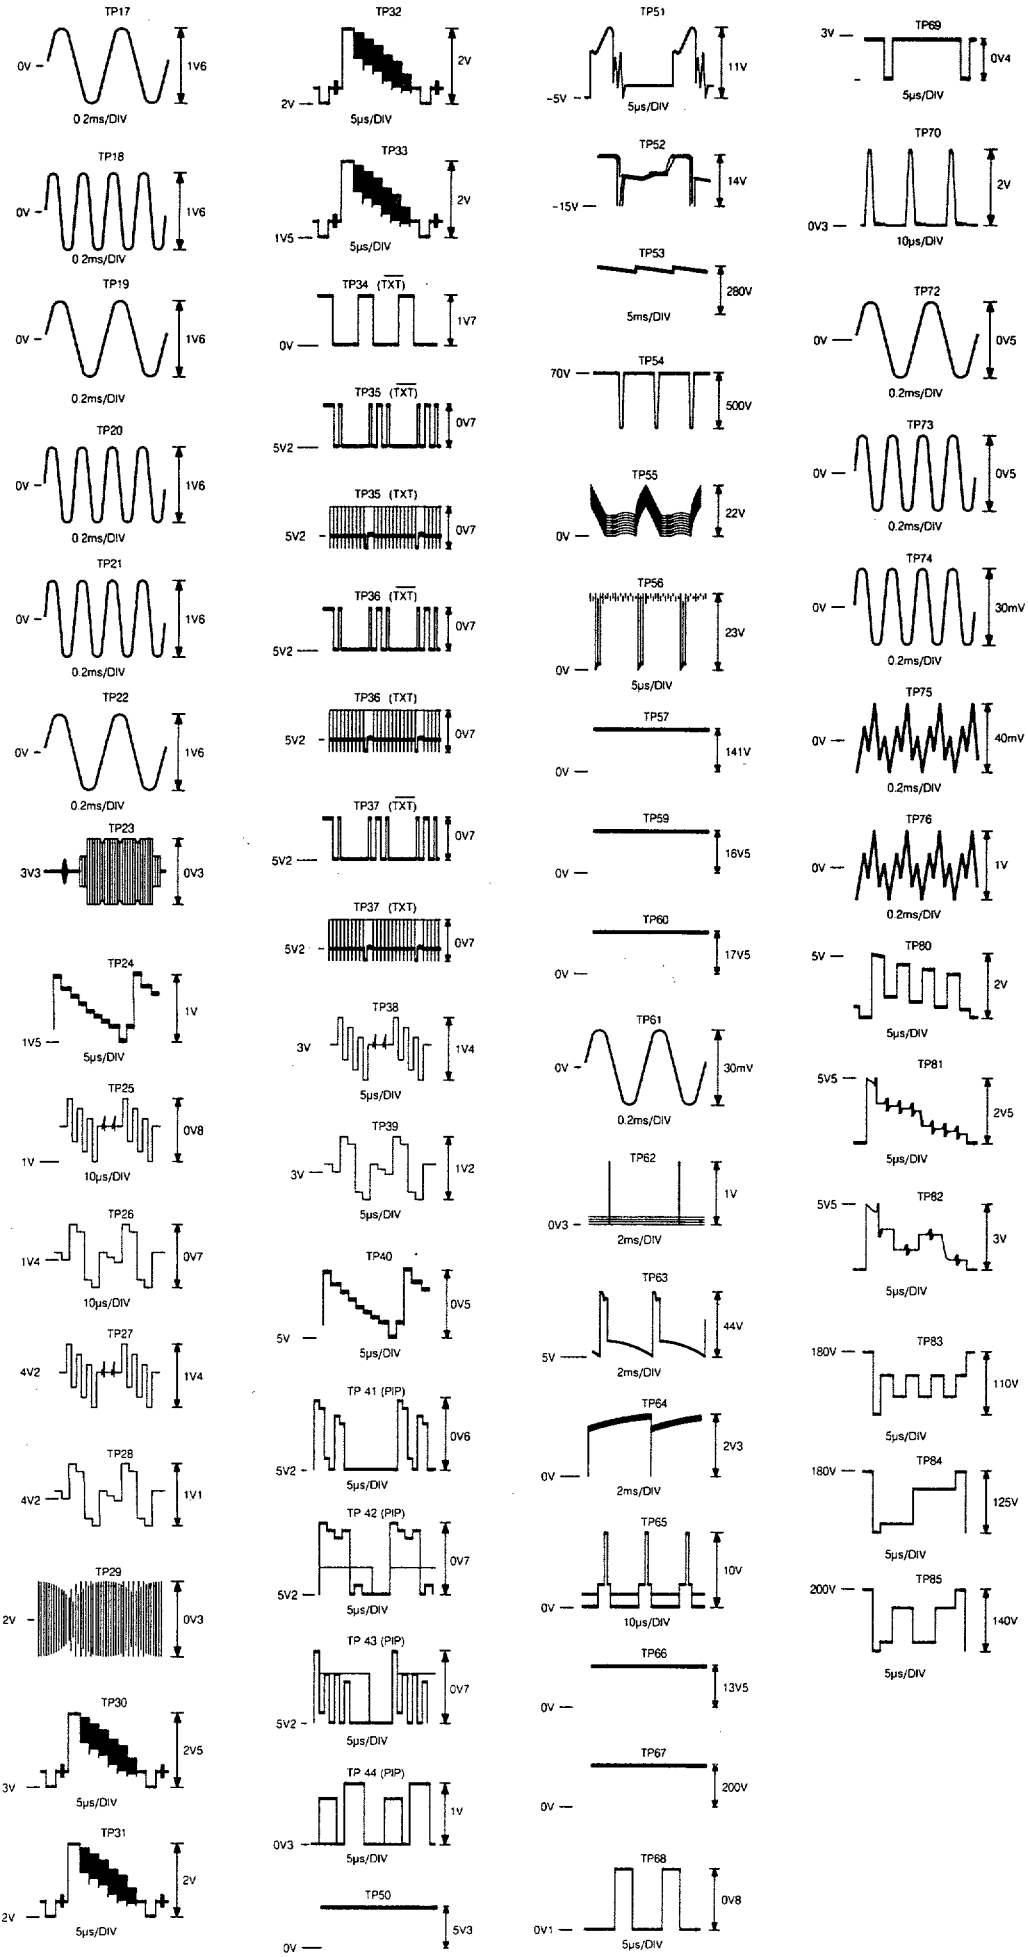

Small signal panel / Klein-signal Platte /

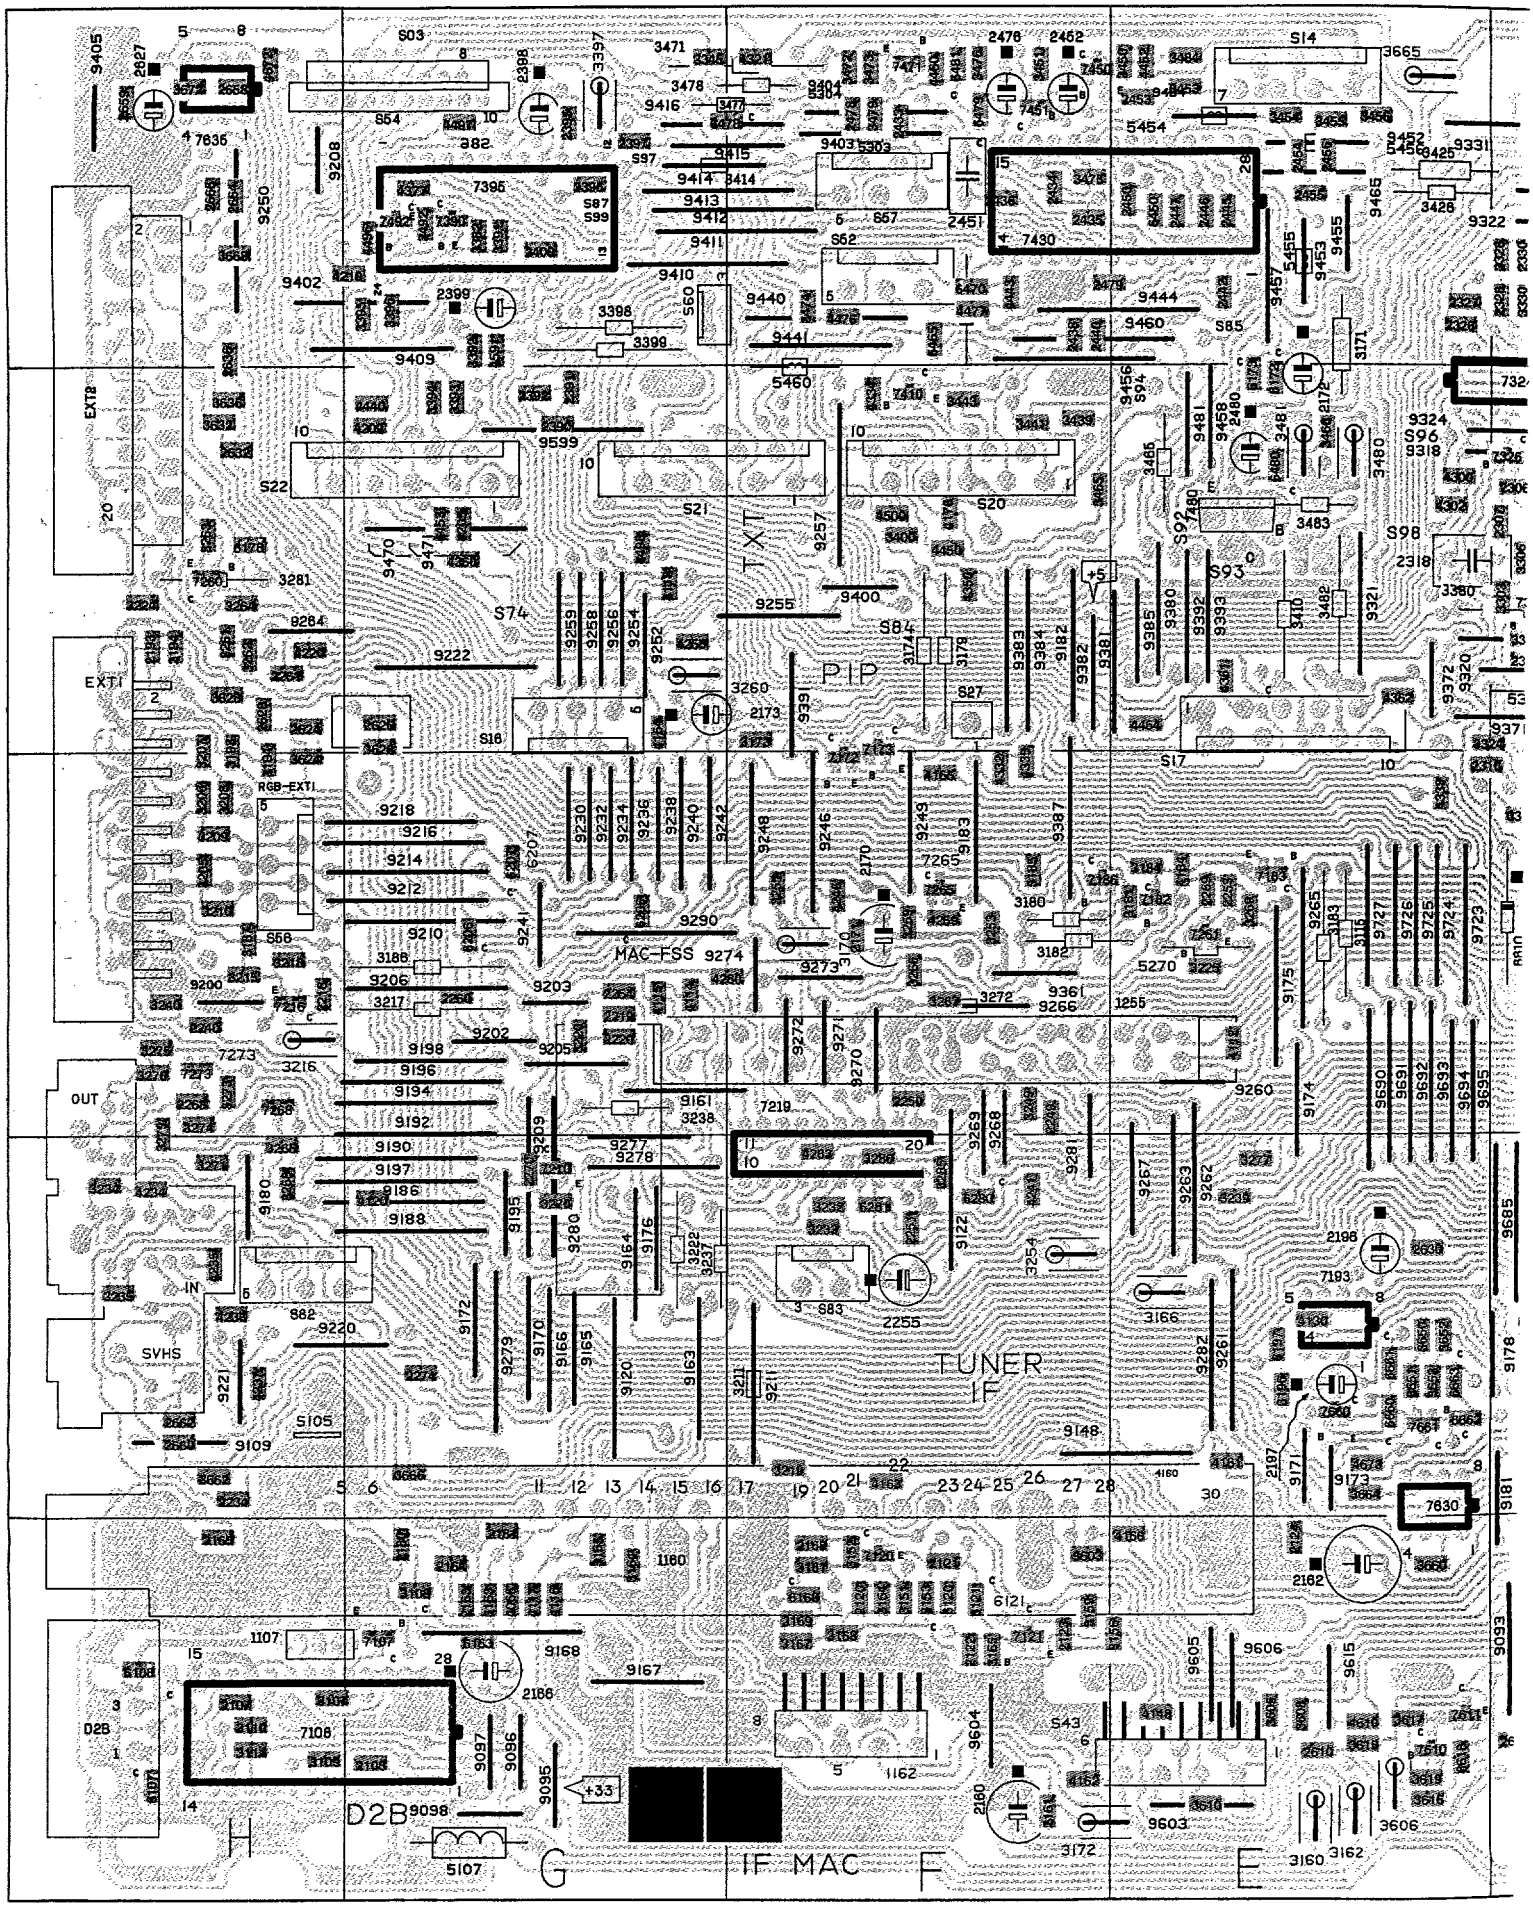

nel / Klein-signal Platte /

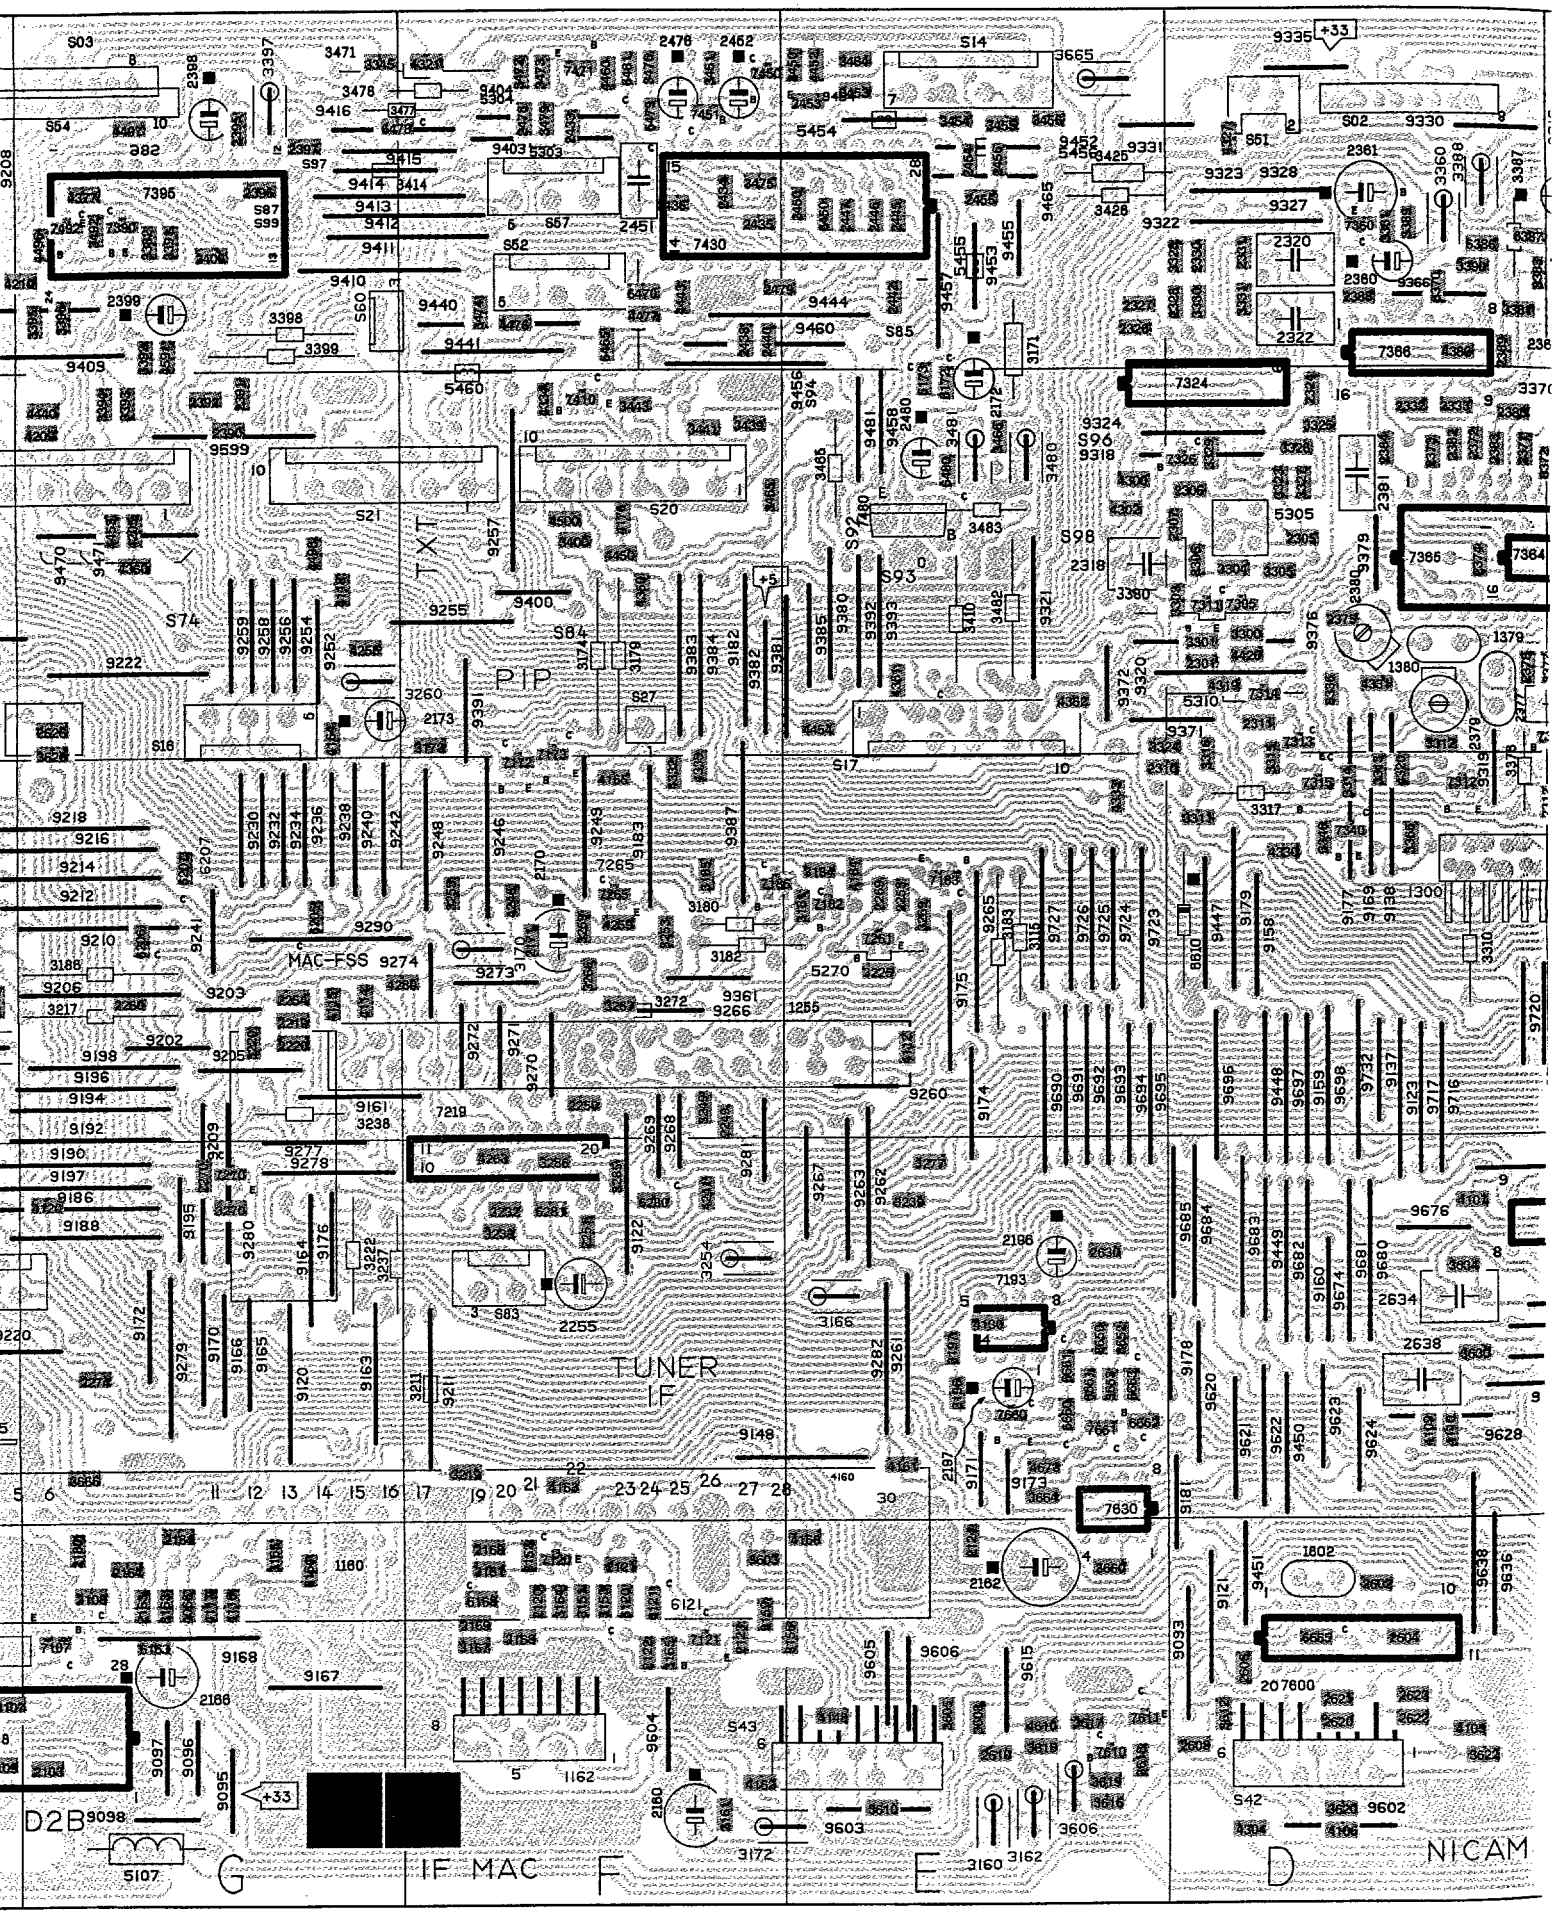

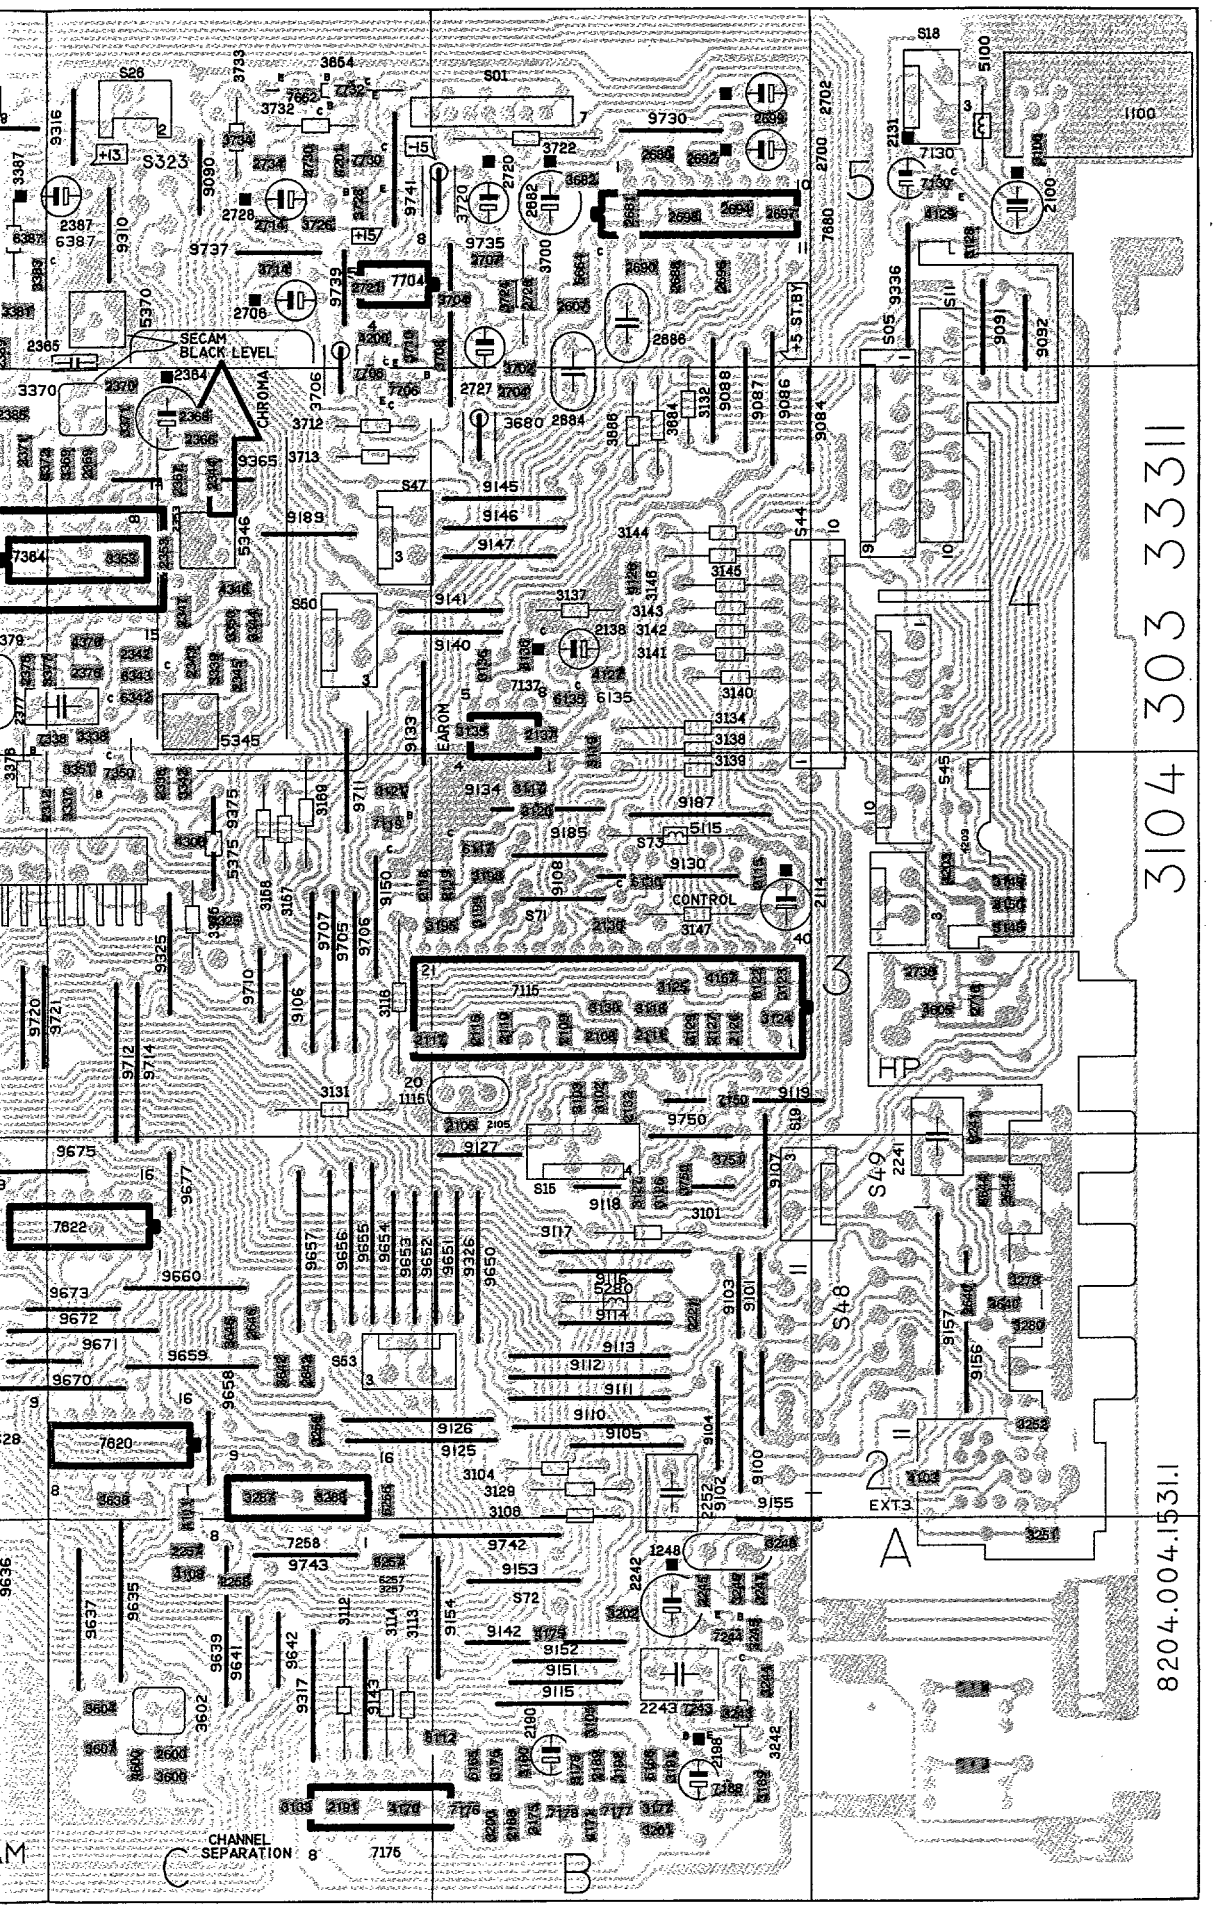

D2B	H1	2250	F3	2636
EXT1	H3	2251	F2	2638
EXT2	H4	2252	B2	2640
EXT3	A3	2253	E3	2642
SVHS	H2	2254	G3	2644
S01	B5	2255	F2	2646
S02	D5	2257	C1	2658
S03	H5	2258	C1	2659
S05	A4	2260	G3	2660
S11	A5	2261	H4	2662
S14	E5	2268	H3	2664
S15	B2	2269	E3	2666
S16	G4	2270	G2	2680
S17	E4	2274	G2	2681
S18	A5	2301	D4	2682
S19	B2	2305	D4	2684
S20	F4	2306	D4	2686
S21	F4	2307	D4	2688
S22	G4	2310	D3	2690
S26	C5	2311	D4	2692
S27	F4	2312	C3	2694
S42	D1	2318	E4	2696
S43	E1	2320	D5	2697
S44	B4	2322	D5	2698
S45	A4	2324	D4	2699
S46	A3	2326	E5	2700
S47	C4	2327	E5	2702
S48	B2	2328	D5	2704
S49	A2	2330	D5	2706
S50	C4	2331	D5	2707
S51	D5	2332	D4	2714
S52	F5	2333	D4	2716
S53	C2	2338	C3	2720
S54	H5	2342	C4	2721
S56	H3	2343	C4	2726
S57	F5	2344	C4	2727
S60	G5	2345	C4	2728
S82	G2	2347	C4	2734
S83	F2	2353	C4	2736
S100	F4	2360	D5	3100
S101	D3	2361	D5	3101
S105	H2	2364	C4	3102
1100	A5	2365	C4	3103
1107	G1	2366	C4	3104
1115	B3	2367	C4	3105
1160	E2	2368	C4	3106
1162	F1	2369	C4	3107
1248	B1	2370	C4	3108
1300	D3	2371	D4	3109
1379	D4	2372	D4	3110
1380	D4	2373	D4	3111
1602	D1	2374	D4	3112
2100	A5	2375	D4	3113
2103	G1	2376	C4	3114
2105	B3	2377	C4	3115
2107	H1	2378	D4	3116
2108	B3	2379	D4	3117
2109	B3	2380	D4	3118
2110	B3	2381	D4	3119
2111	B3	2382	D4	3120
2114	B3	2383	D4	3121
2115	B3	2384	D4	3122
2116	B3	2385	D4	3123
2117	B3	2387	C5	3124
2118	C3	2388	D5	3125
2119	B3	2389	D5	3126
2120	F1	2390	G4	3127
2121	F1	2391	G4	3128
2122	F1	2392	G4	3129
2123	F1	2395	G5	3130
2124	E1	2396	G5	3131
2126	B3	2397	G5	3132
2127	B3	2398	G5	3133
2129	B3	2399	G5	3134
2130	B3	2400	G5	3135
2131	A5	2433	F5	3136
2132	B3	2434	F5	3137
2137	B4	2435	F5	3138
2138	B4	2436	F5	3139
2160	F1	2438	F5	3140
2161	F1	2440	F5	3141
2162	E1	2442	E5	3142
2163	G1	2445	E5	3143
2164	G1	2446	E5	3144
2165	H1	2447	E5	3145
2166	G1	2450	E5	3146
2168	F1	2451	F5	3147
2169	F1	2452	F5	3148
2170	F3	2453	E5	3149
2171	F3	2454	E5	3150
2172	E4	2455	E5	3151
2173	G4	2456	E5	3152
2180	G1	2476	F5	3153
2181	G1	2478	F5	3154
2188	B1	2479	E5	3155
2189	B1	2480	E4	3156
2190	B1	2600	C1	3157
2191	C1	2602	D1	3158
2193	H4	2604	D1	3159
2194	H4	2606	D1	3160
2196	E2	2607	B5	3161
2197	E2	2608	D1	3162
2198	B1	2610	E1	3163
2216	H3	2620	D1	3164
2219	G3	2621	D1	3165
2220	G3	2622	D1	3166
2221	B2	2623	D1	3167
2234	H2	2624	H4	3168
2240	H3	2626	G4	3169
2241	A2	2627	H5	3170
2242	B1	2628	H4	3171
2243	B1	2630	E2	3172
2245	B1	2632	H4	3173
2249	F3	2634	D2	3174

Platine à petites signeaux

H1	2250	F3	2636	H4	3175	B1	3329	D4	3682	B5	4591	G5	7390	G5	9186	G2	9414	G5
H3	2251	F2	2638	D2	3176	B1	3330	D5	3684	B4	4600	C1	7395	G5	9187	B3	9415	F5
H4	2252	B2	2640	A2	3177	B1	3331	D5	3686	B4	4605	A3	7410	F4	9188	G2	9416	F5
A3	2253	E3	2642	C2	3178	B1	3336	D4	3700	B5	4610	E1	7430	E5	9189	C4	9440	F5
H2	2254	G3	2644	A2	3179	F4	3337	C3	3702	B4	4672	H5	7450	F5	9190	G2	9441	F5
B5	2255	F2	2646	C2	3180	F3	3338	C4	3704	B5	4673	E2	7451	F5	9192	G2	9444	E5
D5	2257	C1	2658	H5	3181	E3	3339	C4	3706	C4	5100	A5	7471	F5	9194	G3	9447	D3
H5	2258	C1	2659	H5	3182	F3	3342	C3	3708	B5	5107	G1	7480	E4	9195	G2	9448	D3
A4	2260	G3	2660	H2	3183	E3	3344	C4	3710	C5	5115	B3	7492	G5	9196	G3	9449	D2
A5	2261	H4	2662	H2	3184	E3	3345	G5	3712	C4	5270	E3	7600	D1	9197	G2	9450	D2
E5	2268	H3	2664	H5	3185	F3	3346	D3	3713	C4	5280	B2	7610	E1	9198	G3	9451	D1
B2	2269	E3	2666	H5	3186	G3	3350	C4	3714	C5	5303	F5	7611	E1	9200	H3	9452	E5
G4	2270	G2	2680	B5	3187	H3	3351	C3	3720	B5	5304	F5	7620	C2	9202	G3	9453	E5
E4	2274	G2	2681	B5	3189	B1	3353	C4	3722	B5	5305	D4	7622	C2	9203	G3	9454	E5
A5	2301	D4	2682	B5	3190	B1	3360	D5	3724	B5	5310	D4	7630	E1	9205	G3	9455	E5
B2	2305	D4	2684	B4	3191	B1	3361	D5	3726	C5	5345	C4	7635	H5	9206	G3	9456	F4
F4	2306	D4	2686	B5	3192	B1	3365	D3	3728	C5	5346	C4	7660	E2	9208	H5	9457	E5
F4	2307	D4	2688	B5	3193	H3	3369	C4	3730	C5	5370	C5	7661	E2	9209	G2	9458	E4
G4	2310	D3	2690	B5	3194	H3	3370	C4	3732	C5	5375	C3	7662	C5	9210	G3	9460	F5
C5	2311	D4	2692	B5	3195	B3	3371	C4	3733	C5	5454	E5	7680	B5	9211	F2	9465	E5
F4	2312	C3	2694	B5	3196	E2	3372	C4	3734	C5	5455	E5	7704	C5	9212	G3	9466	E4
D1	2318	E4	2696	B5	3197	E2	3375	C3	3750	B2	5456	E5	7706	C4	9214	G3	9470	G4
E1	2320	D5	2697	B5	3198	B3	3376	D3	3751	B2	5460	F4	7708	C4	9216	G3	9471	G4
B4	2322	D5	2698	B5	3199	B3	3377	C4	3996	A1	6107	H1	7730	C5	9218	G3	9481	E4
A4	2324	D4	2699	B5	3200	B1	3380	D4	3997	A1	6108	H1	7732	C5	9220	G2	9599	G4
A3	2326	E5	2700	B5	3201	B1	3381	D5	3998	A1	6112	B1	9084	B4	9221	H2	9602	D1
C4	2327	E5	2702	B5	3202	B1	3382	G5	3999	A1	6117	B3	9086	B4	9222	G4	9603	E1
B2	2328	D5	2704	B4	3205	H3	3383	D5	4066	G1	6120	F1	9087	B4	9230	G3	9604	F1
A2	2330	D5	2706	C5	3206	H3	3387	D5	4103	A2	6121	F1	9088	B4	9232	G3	9605	E1
C4	2331	D5	2707	B5	3207	H3	3388	D5	4105	D1	6130	B3	9089	G2	9234	G3	9606	E1
D5	2332	D4	2714	C5	3208	H3	3389	D5	4106	D1	6135	B4	9090	C5	9236	G3	9615	E1
F5	2333	D4	2716	A3	3209	H3	3390	D5	4107	D2	6136	B4	9091	A5	9238	G3	9620	D2
C2	2338	C3	2720	B5	3210	H3	3391	G5	4108	C1	6163	G1	9092	A5	9240	G3	9621	D2
H5	2342	C4	2721	C5	3211	F2	3392	G5	4109	D2	6165	B1	9093	D1	9241	G3	9622	D2
H3	2343	C4	2726	B5	3215	H3	3393	G4	4110	D2	6166	B1	9095	G1	9242	G3	9623	D2
F5	2344	C4	2727	B5	3216	H3	3394	G4	4111	C2	6168	F1	9096	G1	9246	F3	9624	D2
G5	2345	C4	2728	C5	3217	G3	3395	G5	4112	E3	6172	E4	9097	G1	9248	F3	9628	D2
G2	2347	C4	2734	C5	3218	H3	3396	G5	4114	G3	6173	E4	9098	G1	9249	F3	9635	C1
F2	2353	C4	2736	A3	3219	F2	3397	G5	4115	G3	6178	H4	9100	B2	9250	H5	9636	D1
F4	2360	D5	3100	A5	3220	G3	3398	G5	4116	G1	6205	G3	9101	B2	9252	G4	9637	C1
D3	2361	D5	3101	B2	3222	G2	3399	G5	4117	G1	6206	G3	9102	B2	9254	G4	9638	D1
H2	2364	C4	3102	B3	3224	H4	3400	F4	4118	G4	6207	G3	9103	B2	9255	F4	9639	C1
A5	2365	C4	3103	B3	3225	E3	3410	E4	4120	G2	6256	C2	9104	B2	9256	G4	9641	C1
G1	2366	C4	3104	B2	3232	F2	3414	G5	4126	B4	6257	C1	9105	B2	9257	F4	9642	C1
B3	2367	C4	3105	B1	3233	F2	3425	E5	4127	B4	6280	F2	9106	C3	9258	G4	9650	B2
E2	2368	C4	3106	B2	3234	H2	3426	E5	4129	A5	6281	F2	9107	B2	9259	G4	9651	B2
F1	2369	C4	3107	H1	3235	H2	3439	F4	4130	E2	6342	C4	9108	B3	9260	E3	9652	C2
B1	2370	C4	3108	G1	3237	G2	3441	F4	4148	E1	6343	C4	9109	H2	9261	E2	9653	C2
D3	2371	D4	3109	H1	3238	G3	3443	F4	4161	E2	6345	E4	9110	B2	9262	E2	9654	C2
D4	2372	D4	3110	H1	3239	E2	3450	E5	4162	F1	6370	D5	9111	B2	9263	E2	9655	C2
D4	2373	D4	3111	H1	3240	H3	3451	F5	4163	F2	6386	D5	9112	B2	9264	H4	9656	C2
D1	2374	D4	3112	C1	3241	A3	3453	E5	4164	G4	6387	D5	9113	B2	9265	E3	9657	C2
A5	2375	D4	3113	C1	3242	B1	3454	E5	4165	F3	6450	E5	9114	B2	9266	F3	9658	C2
G1	2376	C4	3114	C1	3243	B1	3455	E5	4166	E1	6465	F5	9115	B1	9267	E2	9659	C2
B3	2377	C4	3115	E3	3244	B1	3456	E5	4167	B3	6470	F5	9116	B2	9268	F3	9660	C2
H1	2378	D4	3116	C3	3245	B1	3465	F4	4170	C1	6471	F5	9117	B2	9269	F2	9670	C2
B3	2379	D4	3117	B3	3246	B1	3466	E4	4171	B1	6478	F5	9118	B2	9270	F3	9671	C2
B3	2380	D4	3118	B3	3247	B1	3471	F5	4175	B1	6479	F5	9119	B3	9271	F3	9672	C2
B3	2381	D4	3119	B3	3248	B1	3472	F5	4176	F4	6480	E4	9120	G2	9272	F3	9673	C2
B3	2382	D4	3120	B3	3249	F3	3473	F5	4184	E3	6481	F5	9121	D1	9273	F3	9674	D2
B3	2383	D4	3121	C3	3251	A1	3474	F5	4200	C5	6610	D3	9122	F2	9274	F3	9675	D2
B3	2384	D4	3122	B3	3252	A2	3475	F5	4201	C5	6611	D3	9123	D3	9277	G2	9676	D2
B3	2385	D4	3123	B3	3253	F3	3476	F5	4203	A3	6660	E2	9125	C2	9278	G2	9677	C2
B3	2387	C5	3124	B3	3254	F2	3477	F5	4205	G4	6661	E2	9126	C2	9279	G2	9680	D2
C3	2388	D5	3125	B3	3255	F3	3478	F5	4209	G4	6662	E2	9127	B2	9280	G2	9681	D2
B3	2389	D5	3126	B2	3256	C2	3479	F5	4210	G5	6663	E2	9130	B3	9281	F2	9682	D2
F1	2390	G4	3127	B2	3257	C1	3480	E4	4220	H4	6664	B5	9131	G2	9282	E2	9683	D2
F1	2391	G4	3128	A5	3259	F3	3481	E4	4234	H2	6665	D1	9132	F2	9290	G3	9684	D2
F1	2392	G4	3129	B2	3260	G4	3482	E4	4235	H2	7107	G1	9133	C4	9310	C5	9685	D2
F1	2395	G5	3130	B3	3261	H4	3483	E4	4236	H2	7108	G1	9134	B3	9316	C5	9690	E3
E1	2396	G5	3131	C3	3262	H4	3484	E5	4237	H2	7115	B3	9137	D3	9317	C1	9691	E3
B3	2397	G5	3132	B4	3263	H4	3492	G5	4241	F2	7119	C3	9138	D3	9318	D4	9692	E3
B3	2398	G5	3133	C1	3264	H4	3600	C1	4246	F3	7120	F1	9140	B4	9319	D3	9693	E3
B3	2399	G5	3134	B4	3265	H2	3602	C1	4255	G4	7121	F1	9141	B4	9320	D4	9694	E3
B3	2400	G5	3135	B4	3266	F3	3603	F1	4259	F3	7130	A5	9142	B1	9321	E4	9695	E3
A5	2433	F5	3136	B4	3267	F3	3604	C1	4263	F2	7137	B3	9143	C1	9322	D5	9696	D3
B3	2434	F5	3137	B4	3268	H2	3605	E1	4280	F3	7150	B3	9145	B4	9323	D5	9697	D3
B4	2435	F5	3138	B3	3269	E3	3606	E1	4300	E4	7172	F3	9146	B4	9324	D4	9698	D3
B4	2436	F5	3139	B3	3270	G2	3607	C1	4302	E4	7173	F3	9147	B4	9325	C3	9705	C3
F1	2438	F5	3140	B4	3271	H2	3608	E1	4304	D1	7175	B1	9148	E2	9326	B2	9706	C3
F1	2440	F5	3141	B4	3272	F3	3610	E1	4306	C3	7176	B1	9150	C3	9327	D5	9707	C3
E1	2442	E5	3142	B4	3273	H3	3612	D1	4319	D4	7177	B1	9151	B1	9328	D5	9710	C3
G1	2445	E5	3143	B4	3274	H3	3615	E1	4320	D3	7178	B1	9152	B1	9330	D5	9711	C3
G1	2446	E5	3144	B4	3275	H3	3616	E1	4321	F5	7182	E3	9153	B1	9331	E5	9712	C3
H1	2447	E5	3145	B4	3276	H3	3617	E1	4325	C3	7183	E3	9154	B1	9335	D5	9714	C3
G1	2450	E5	3146	B4	3277	E2	3618	E1	4327	D5	7186	E3	9155	B1	9336	A5	9716	D3
F1	2451	F5	3147	B3	3278	A2	3619	E1	4330	D3	7188	B1	9156	A2	9361	F3	9717	D3
F1	2452	F5	3148	A3	3279	H2	3620	D1	4331	D4	7193	E2	9157	A2	9365	C4	9720	D3
F3	2453	E5	3149	A3	3280	A2	3622	D1	4332	F3	7216	H3	9158	D3	9366	D5	9721	C3
F3	2454	E5	3150	A3	3281	H4	3624	H3	4333	E3	7219	F2	9159	D3	9371	D4	9723	E3
E4	2455	E5	3151	F1	3285	F2	3626	G3	4334	F4	7243	B1	9160	D2	9372	E4	9724	E3
G4	2456	E5	3152	F1	3286	F2	3628	H4	4335	F3	7244	B1	9161	G3	9375	C3	9725	E3
G1	2476	F5	3153	F1	3287	C2	3630	D2	4346	C4	7258	C1	9163	G2	9376	D4	9726	E3
G1	2478	F5	3154	F1	3288	C2	3632	H4	4350	F4	7260	H4	9164	G2	9379	D4	9727	E3
B1	2479	E5	3155	F1	3300	D4	3634	D2	4360	G4	7261	E3	9165	G2	9380	E4	9730	B5
B1	2480	E4	3156	E1	3301	D4	3636	H4	4361	E4	7265	F3	9166	G2	9381	E4	9732	D3
B1	2600	C1	3157	C3	3303	D4	3638	C2	4362	E4	7268	H3	9167	G1	9382	F4	9735	B5
C1	2602	D1	3158	C3	3304	D4	3640	A2	4376	C4	7270	G2	9168	G1	9383	F4	9737	C5
H4	2604	D1	3159	F1	3305	D4	3642	C2	4377	G5	7273	H3	9169	D3	9384	F4	9739	C5
H4	2606	D1	3160	E1	3306	D4	3644	A2	4386	D5	7305	D4	9170	G2	9385	E4	9741	C5
E2	2607	B5	3161	F1	3310	D3	3646	C2	4420	D4	7311	D4	9171	E2	9387	F3	9742	B1
E2	2608	D1	3162	E1	3311	D3	3650	E2	4440	G4	7312	D3	9172	G2	9391	F4	9743	C1
B1	2610	E1	3163	G1	3312	D4	3651	E2	4443	F5	7313	D4	9173	E2	9392	E4	9750	B2
H3	2620	D1	3164	G1	3313	D3	3652	E2	4450	F4	7314	D4	9174	E3	9393	E4		
G3	2621	D1	3165	G1	3314	D3	3653	E2	4452	E5	7315	D3	9175	E3	9400	F4		
G3	2622	D1	3166	E2	3315	D3	3654	C5	4453	G4	7324	E5	9176	G2	9402	G5		
B2	2623	D1	3167	F1	3316	D3	3660	E1	4454	E4	7326	D4	9177	D3	9403	F5		
H2	2624	H4	3168	F1	3317	D3	3662	H2	4460	F5	7338	C4	9178	D2	9404	F5		
H3	2626	G4	3169	C3	3323	D4	3664	E2	4476	F5	7340	D3	9179	D3	9405	H5		
A2	2627	H5	3170	F3	3324	D4	3665	E5	4477	F5	7350	C3	9180	H2	9409	G5		
B1	2628	H4	3171	E5	3325	D4	3666	G2	4496	G5	7360	D5	9181	D2	9410	G5		
B1	2630	E2	3172	E1	3326	D4	3668	H5	4497	G5	7364	D4	9182	F4	9411	F5		
B1	2632	H4	3173	F4	3327	D4	3672	H5	4498	G4	7365	D4	9183	F3	9412	F5		
F3	2634	D2	3174	F4	3328	D5	3680	B4	4500	F4	7366	D5	9185	B3	9413	F5		

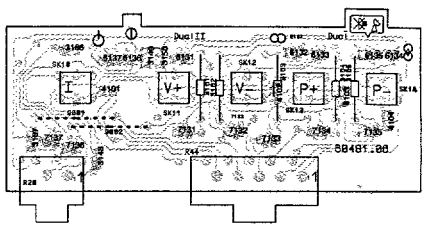

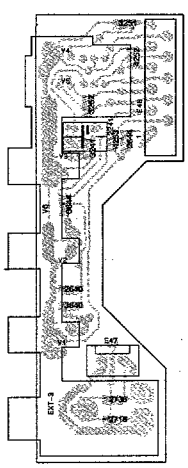



Source selection / Quellenwahl /

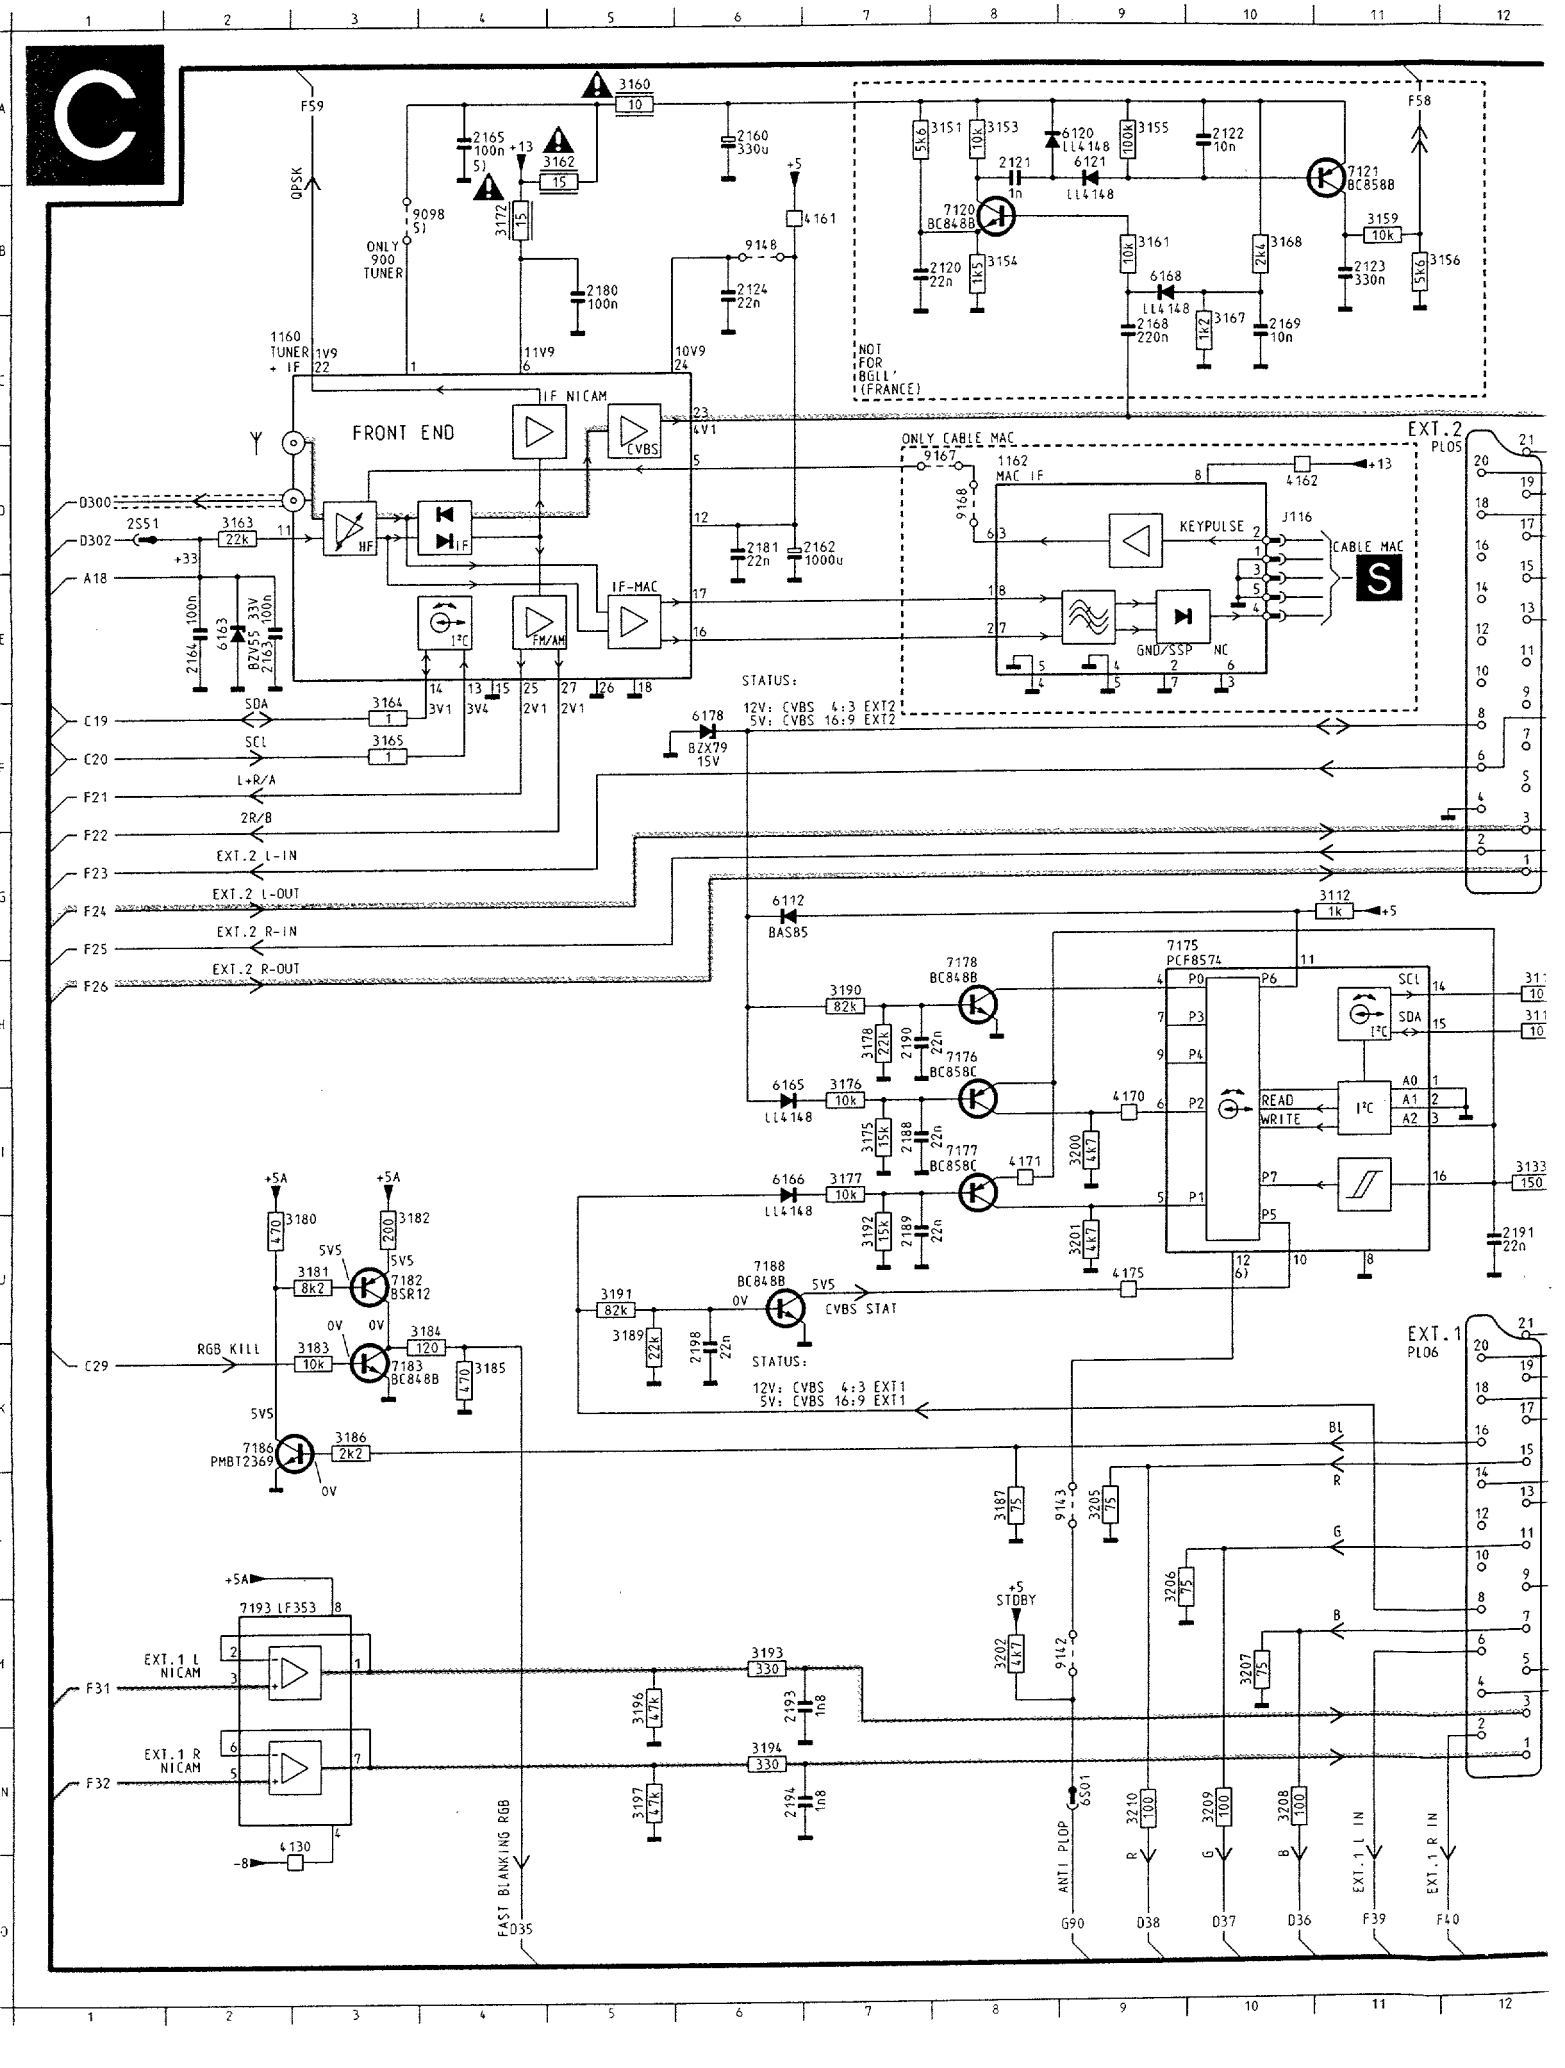

Sélection de source

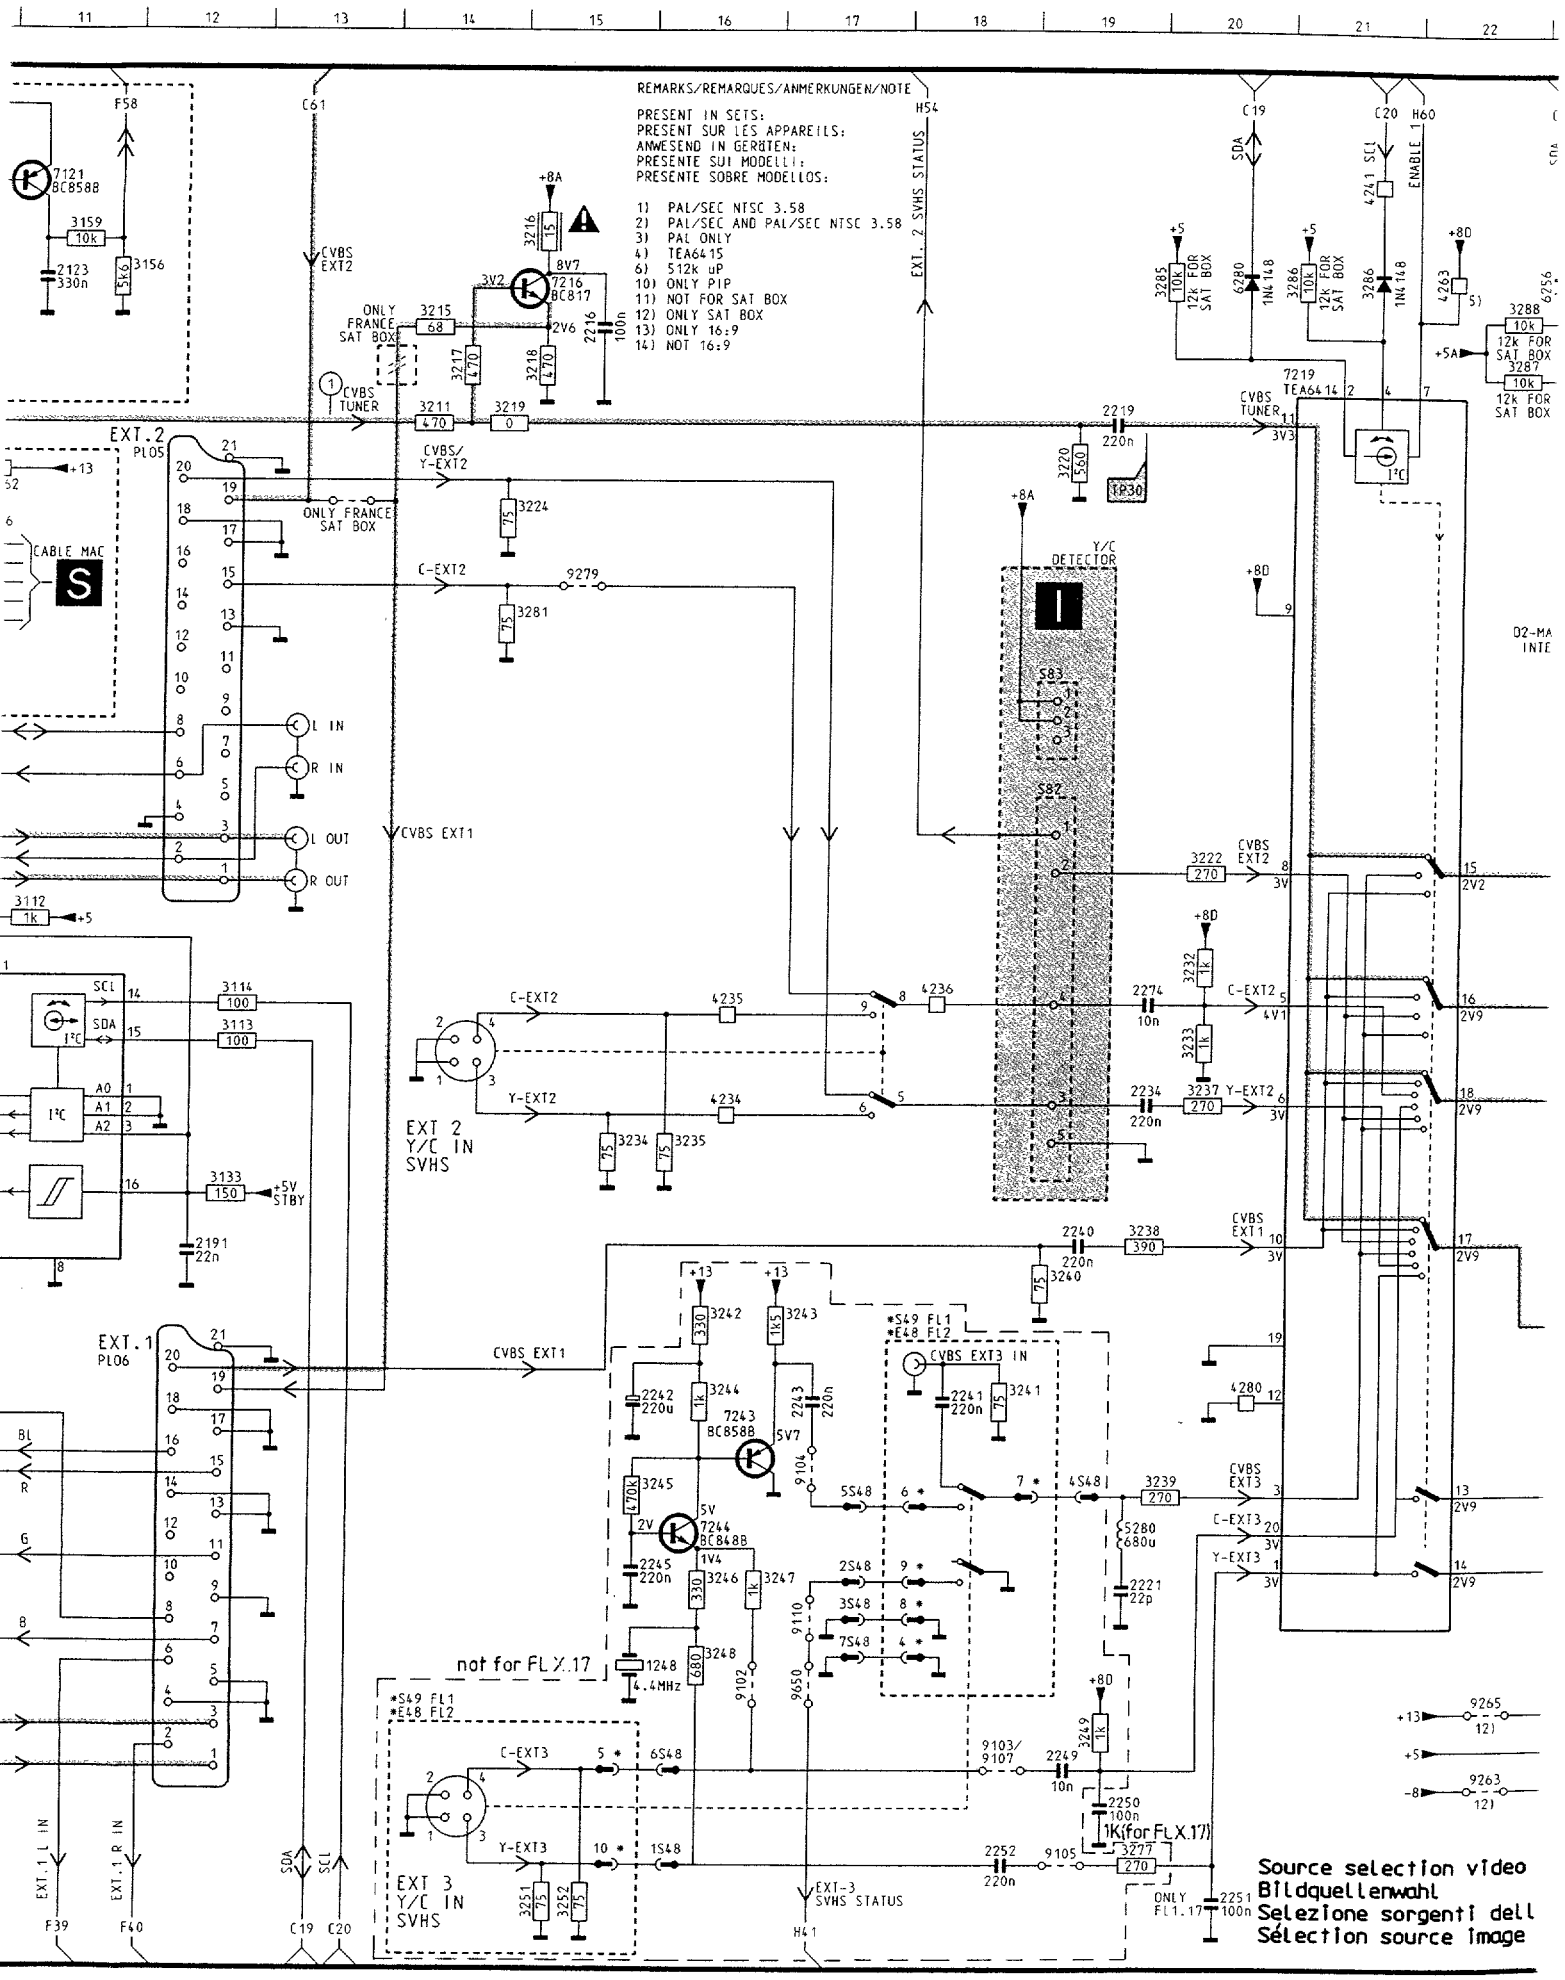

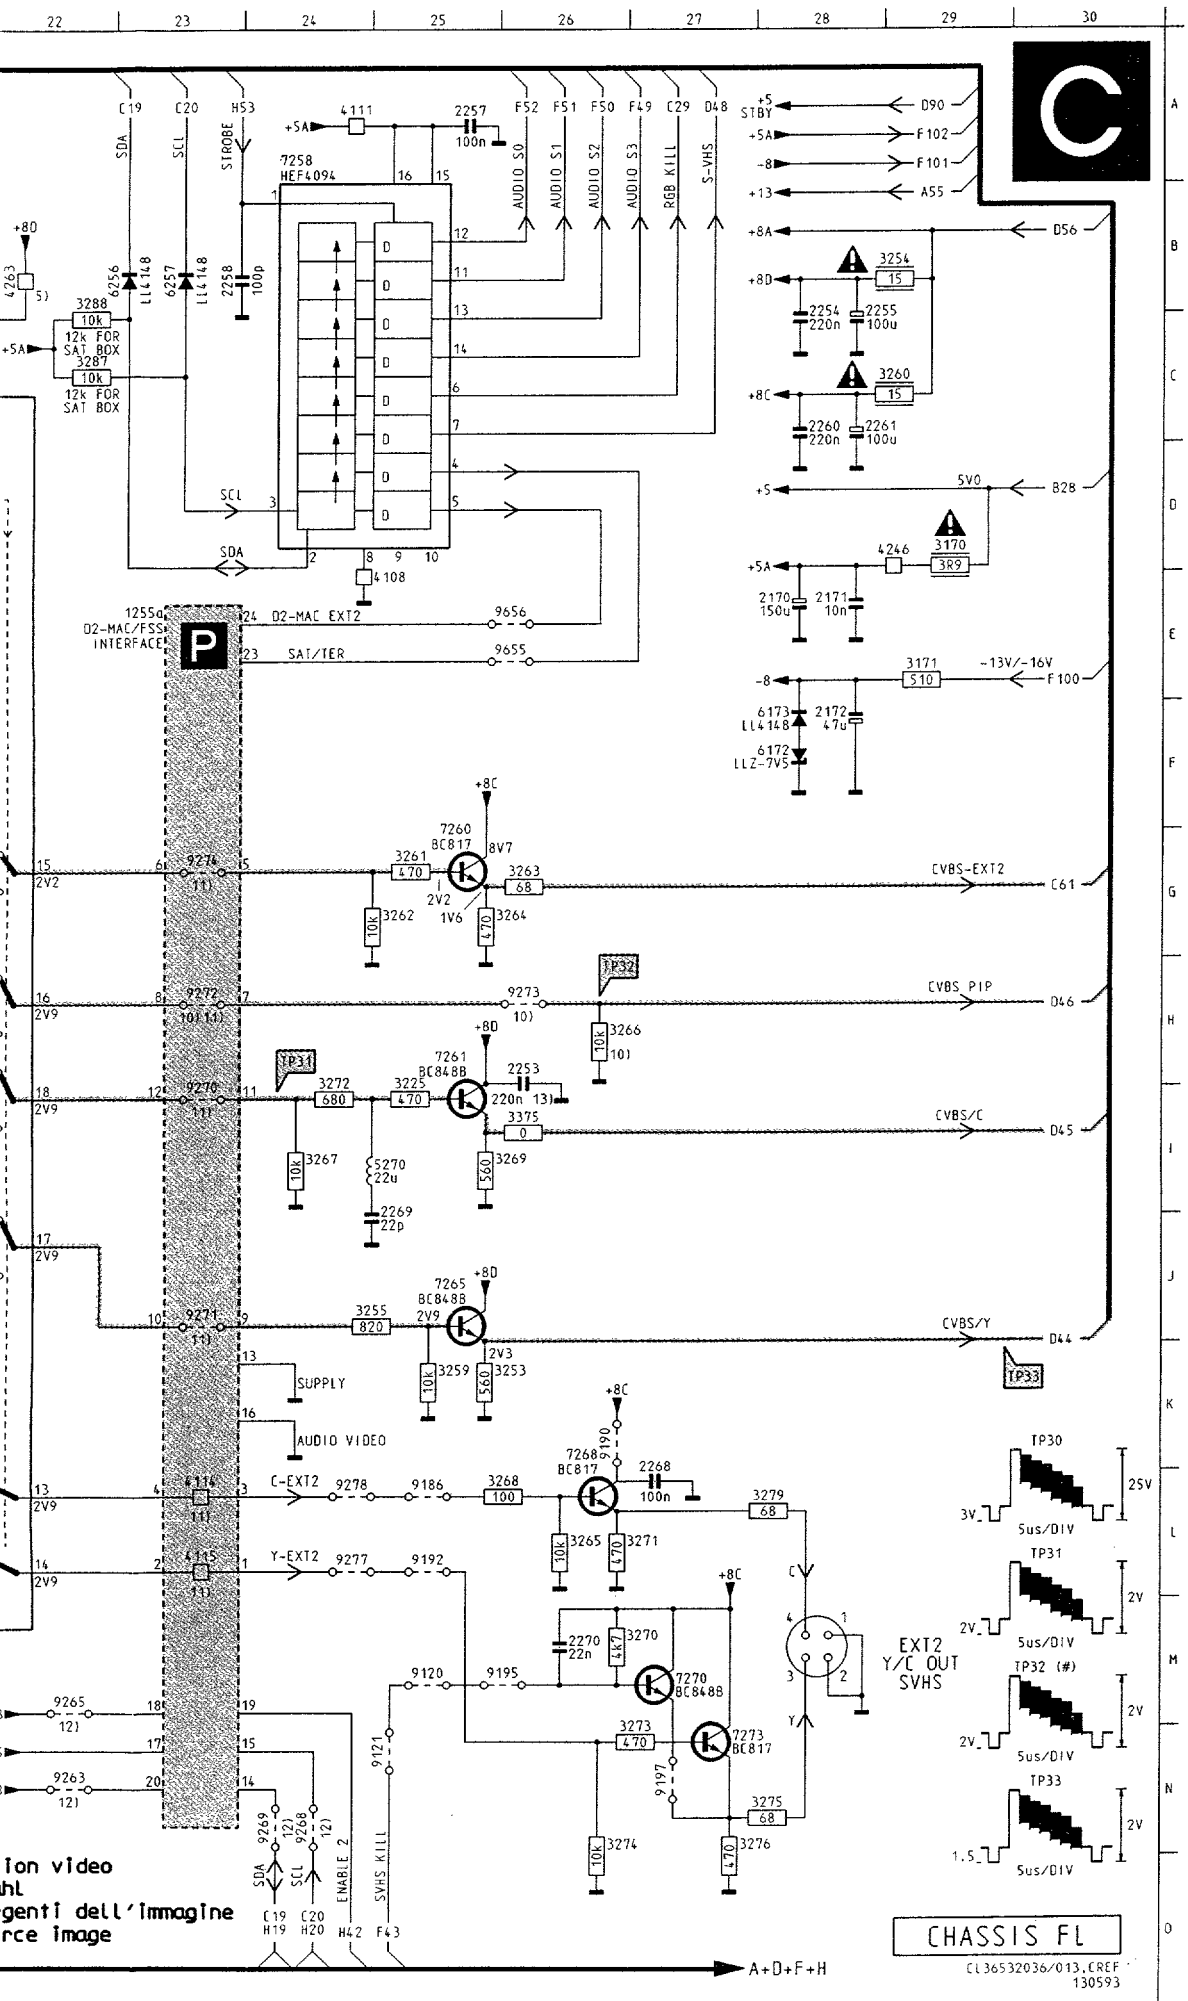

1160	C 2	3237	I20	9197	N27
1162	D 8	3238	J19	9263	N22
1248	M16	3239	L20	9265	M22
1255	E23	3240	J19	9268	N24
2120	B 7	3241	K18	9269	N24
2121	A 8	3242	J16	9270	I23
2122	A10	3243	J17	9271	J23
2123	B11	3244	K16	9272	H23
2124	B 6	3245	L16	9273	M26
2160	A 6	3246	L16	9274	G23
2162	D 7	3247	L16	9277	L24
2163	E 2	3248	M16	9278	L24
2164	E 2	3249	N19	9279	E15
2165	A 4	3251	O15	9650	M17
2168	C 9	3252	O15	9655	E26
2169	C10	3253	K25	9656	E26
2170	E28	3254	B29		
2171	E28	3255	J25		
2172	F28	3259	K25		
2180	B 5	3260	C29		
2181	D 6	3261	G25		
2188	I 7	3262	G25		
2189	J 7	3263	G26		
2190	H 7	3264	G25		
2191	J12	3265	L26		
2193	M 6	3266	H26		
2194	N 6	3267	I24		
2198	K 6	3268	L26		
2216	C15	3269	I25		
2219	C19	3270	M27		
2221	L19	3271	L27		
2234	I19	3272	I24		
2240	J19	3273	N27		
2241	K18	3274	N26		
2242	K15	3275	N28		
2243	K17	3276	N27		
2245	L15	3277	O19		
2249	N19	3279	L28		
2250	N19	3281	E14		
2251	O20	3285	B19		
2252	O18	3286	B21		
2253	H26	3286	B21		
2254	C28	3287	C22		
2255	C28	3288	B22		
2257	A25	3375	I26		
2258	B23	4108	E25		
2260	C28	4111	A24		
2261	C28	4114	L23		
2268	L27	4115	L23		
2269	J25	4130	N 3		
2270	M26	4161	B 7		
2274	H19	4162	D10		
3112	G11	4170	I 9		
3113	H12	4171	I 8		
3114	H12	4175	J 9		
3133	I12	4234	I16		
3151	A 7	4235	H16		
3153	A 8	4236	H18		
3154	B 8	4241	B21		
3155	A 9	4246	D29		
3156	B11	4263	B22		
3159	B11	4280	K20		
3160	A 5	5270	I25		
3161	B 9	5280	L19		
3162	A 5	6112	G 6		
3163	D 2	6120	A 9		
3164	F 3	6121	A 9		
3165	F 3	6163	E 2		
3167	C10	6165	I 6		
3168	B10	6166	I 6		
3170	D29	6168	B 9		
3171	E29	6172	F28		
3172	B 4	6173	F28		
3175	I 7	6178	F 6		
3176	I 7	6256	B23		
3177	I 7	6257	B23		
3178	H 7	6280	B20		
3180	I 2	7120	B 8		
3181	J 3	7121	B11		
3182	I 3	7175	H 9		
3183	K 3	7176	H 8		
3184	J 4	7177	I 8		
3185	K 4	7178	H 8		
3186	K 3	7182	J 3		
3187	L 8	7183	K 3		
3189	J 5	7186	K 2		
3190	H 7	7188	J 6		
3191	J 5	7193	M 2		
3192	J 7	7216	B15		
3193	M 6	7219	C20		
3194	N 6	7243	K16		
3196	M 5	7244	L16		
3197	N 5	7258	A24		
3200	I 9	7260	G25		
3201	J 9	7261	H25		
3202	M 8	7265	J25		
3205	L 9	7268	K26		
3206	L 9	7270	M27		
3207	M10	7273	N27		
3208	N10	9098	B 3		
3209	N10	9102	M16		
3210	N 9	9103	N18		
3211	C14	9104	K17		
3215	C14	9105	O19		
3216	B15	9110	M17		
3217	C14	9120	M25		
3218	C15	9121	N25		
3219	C14	9142	M 9		
3220	D19	9143	L 9		
3222	G20	9148	B 6		
3224	D14	9167	D 8		
3225	I25	9168	D 8		
3232	H20	9186	L25		
3233	H20	9190	K26		
3234	I15	9192	L25		
3235	I16	9195	M26		

Synchronization / Synchronisierung /

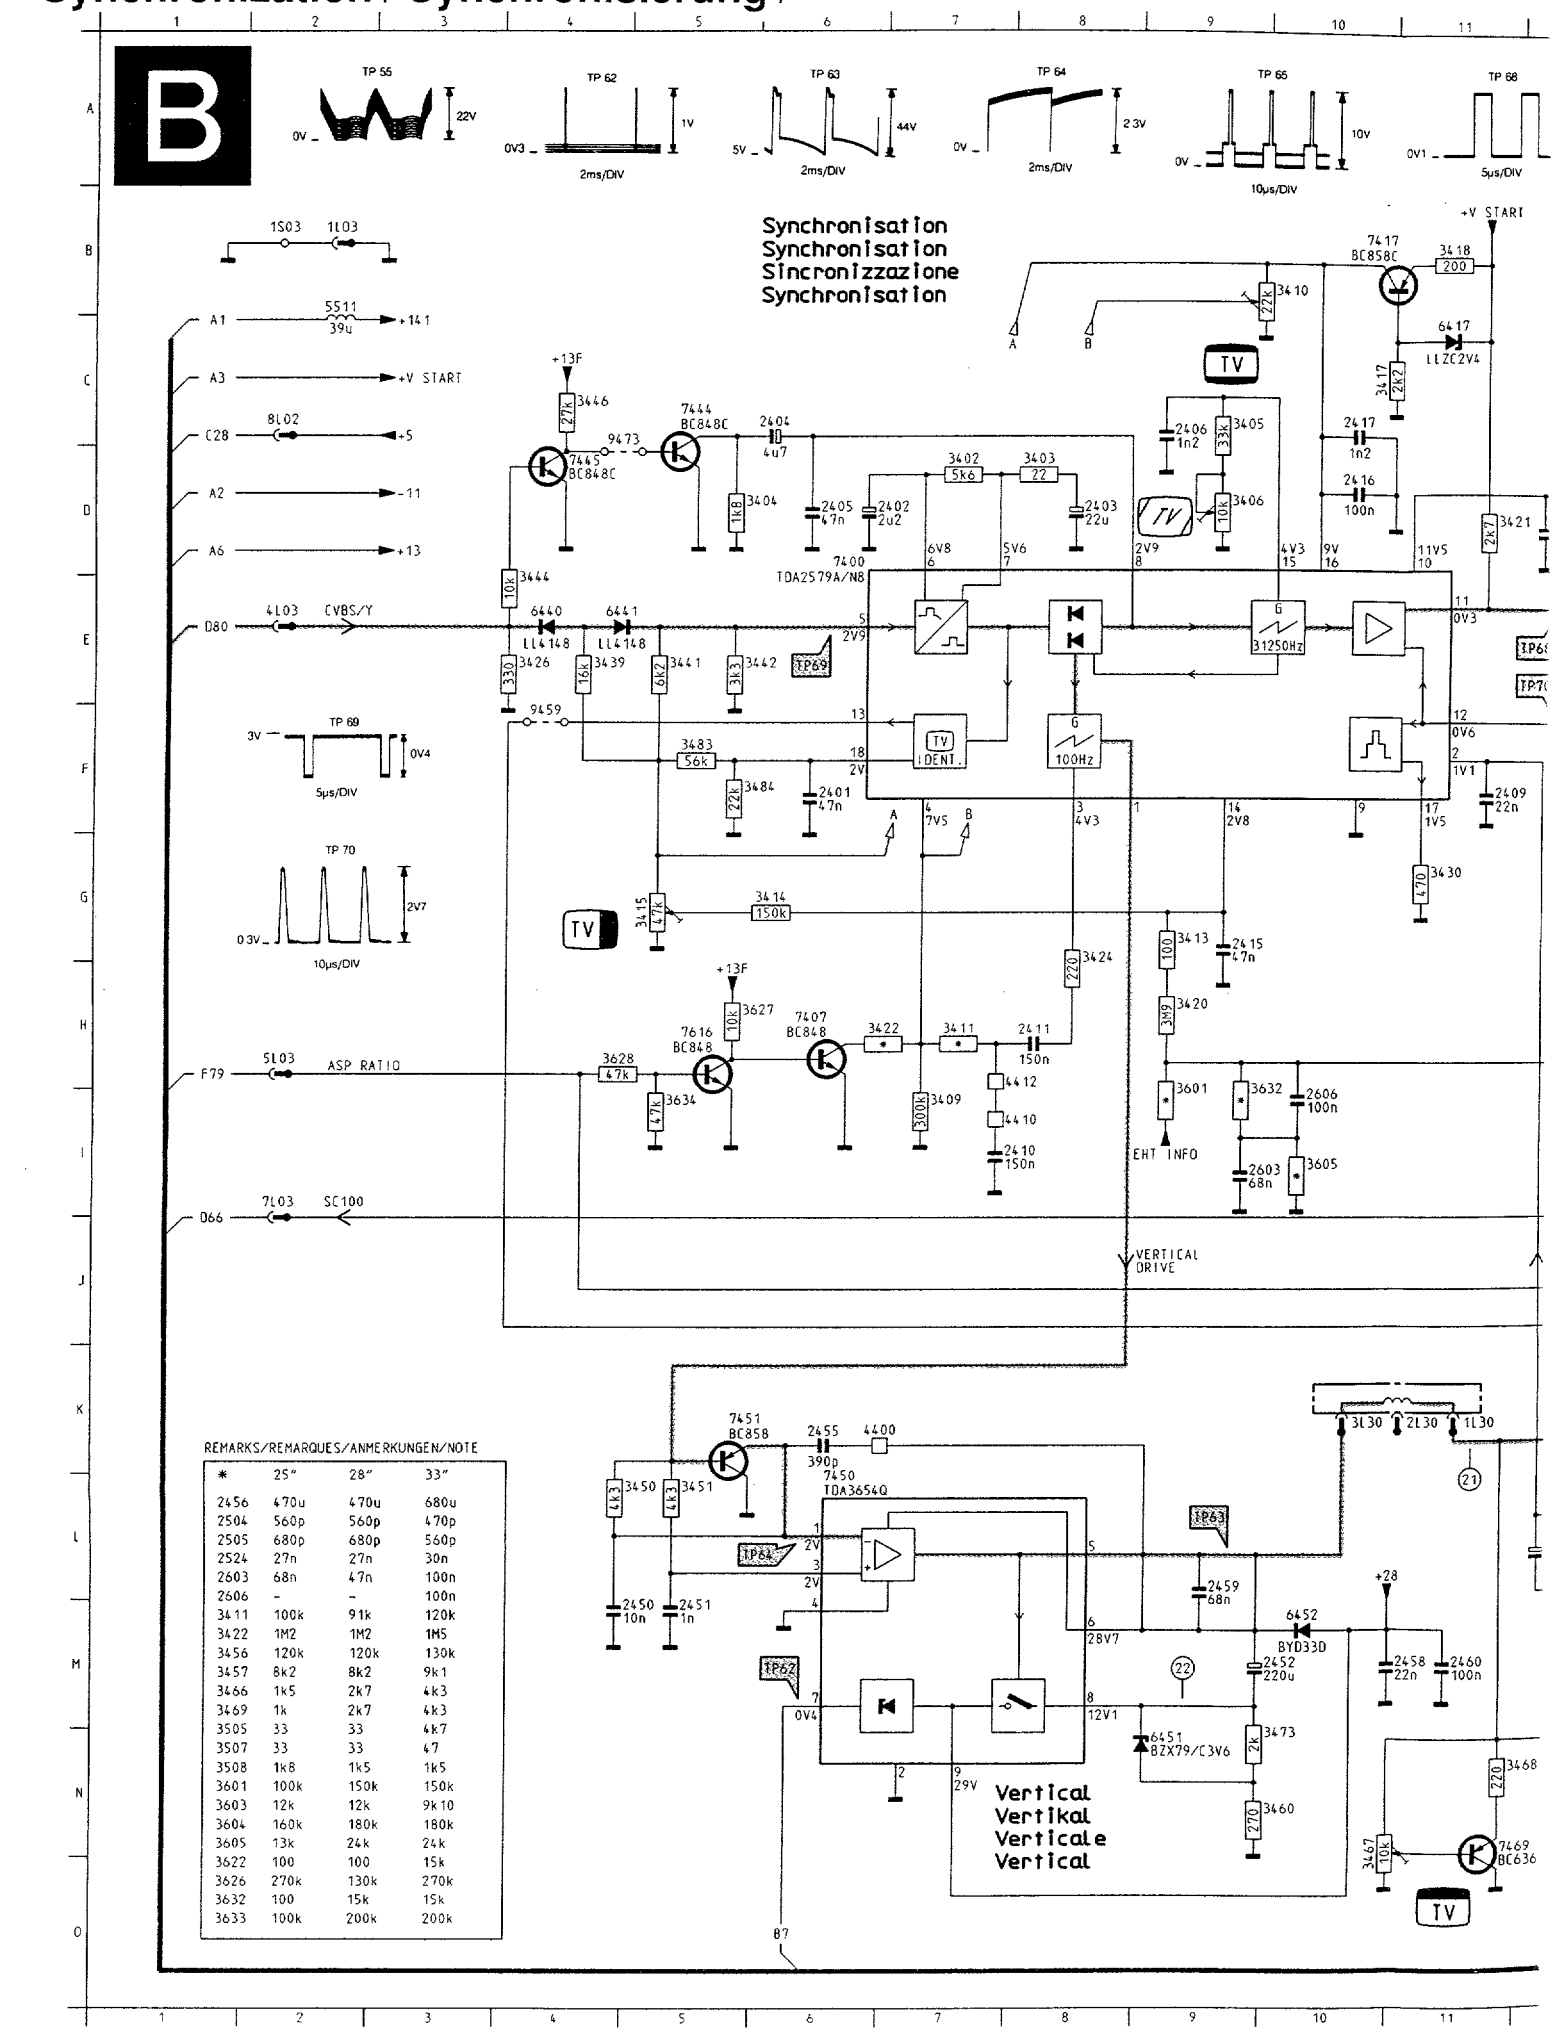

REMARKS/REMARQUES/ANMERKUNGEN/NOTE

*	25"	28"	33"
2456	470u	470u	680u
2504	560p	560p	470p
2505	680p	680p	560p
2524	27n	27n	30n
2603	68n	47n	100n
2606	-	-	100n
3411	100k	91k	120k
3422	1M2	1M2	1M5
3456	120k	120k	130k
3457	8k2	8k2	9k1
3466	1k5	2k7	4k3
3469	1k	2k7	4k3
3505	33	33	4k7
3507	33	33	47
3508	1k8	1k5	1k5
3601	100k	150k	150k
3603	12k	12k	9k10
3604	160k	180k	180k
3605	13k	24k	24k
3622	100	100	15k
3626	270k	130k	270k
3632	100	15k	15k
3633	100k	200k	200k

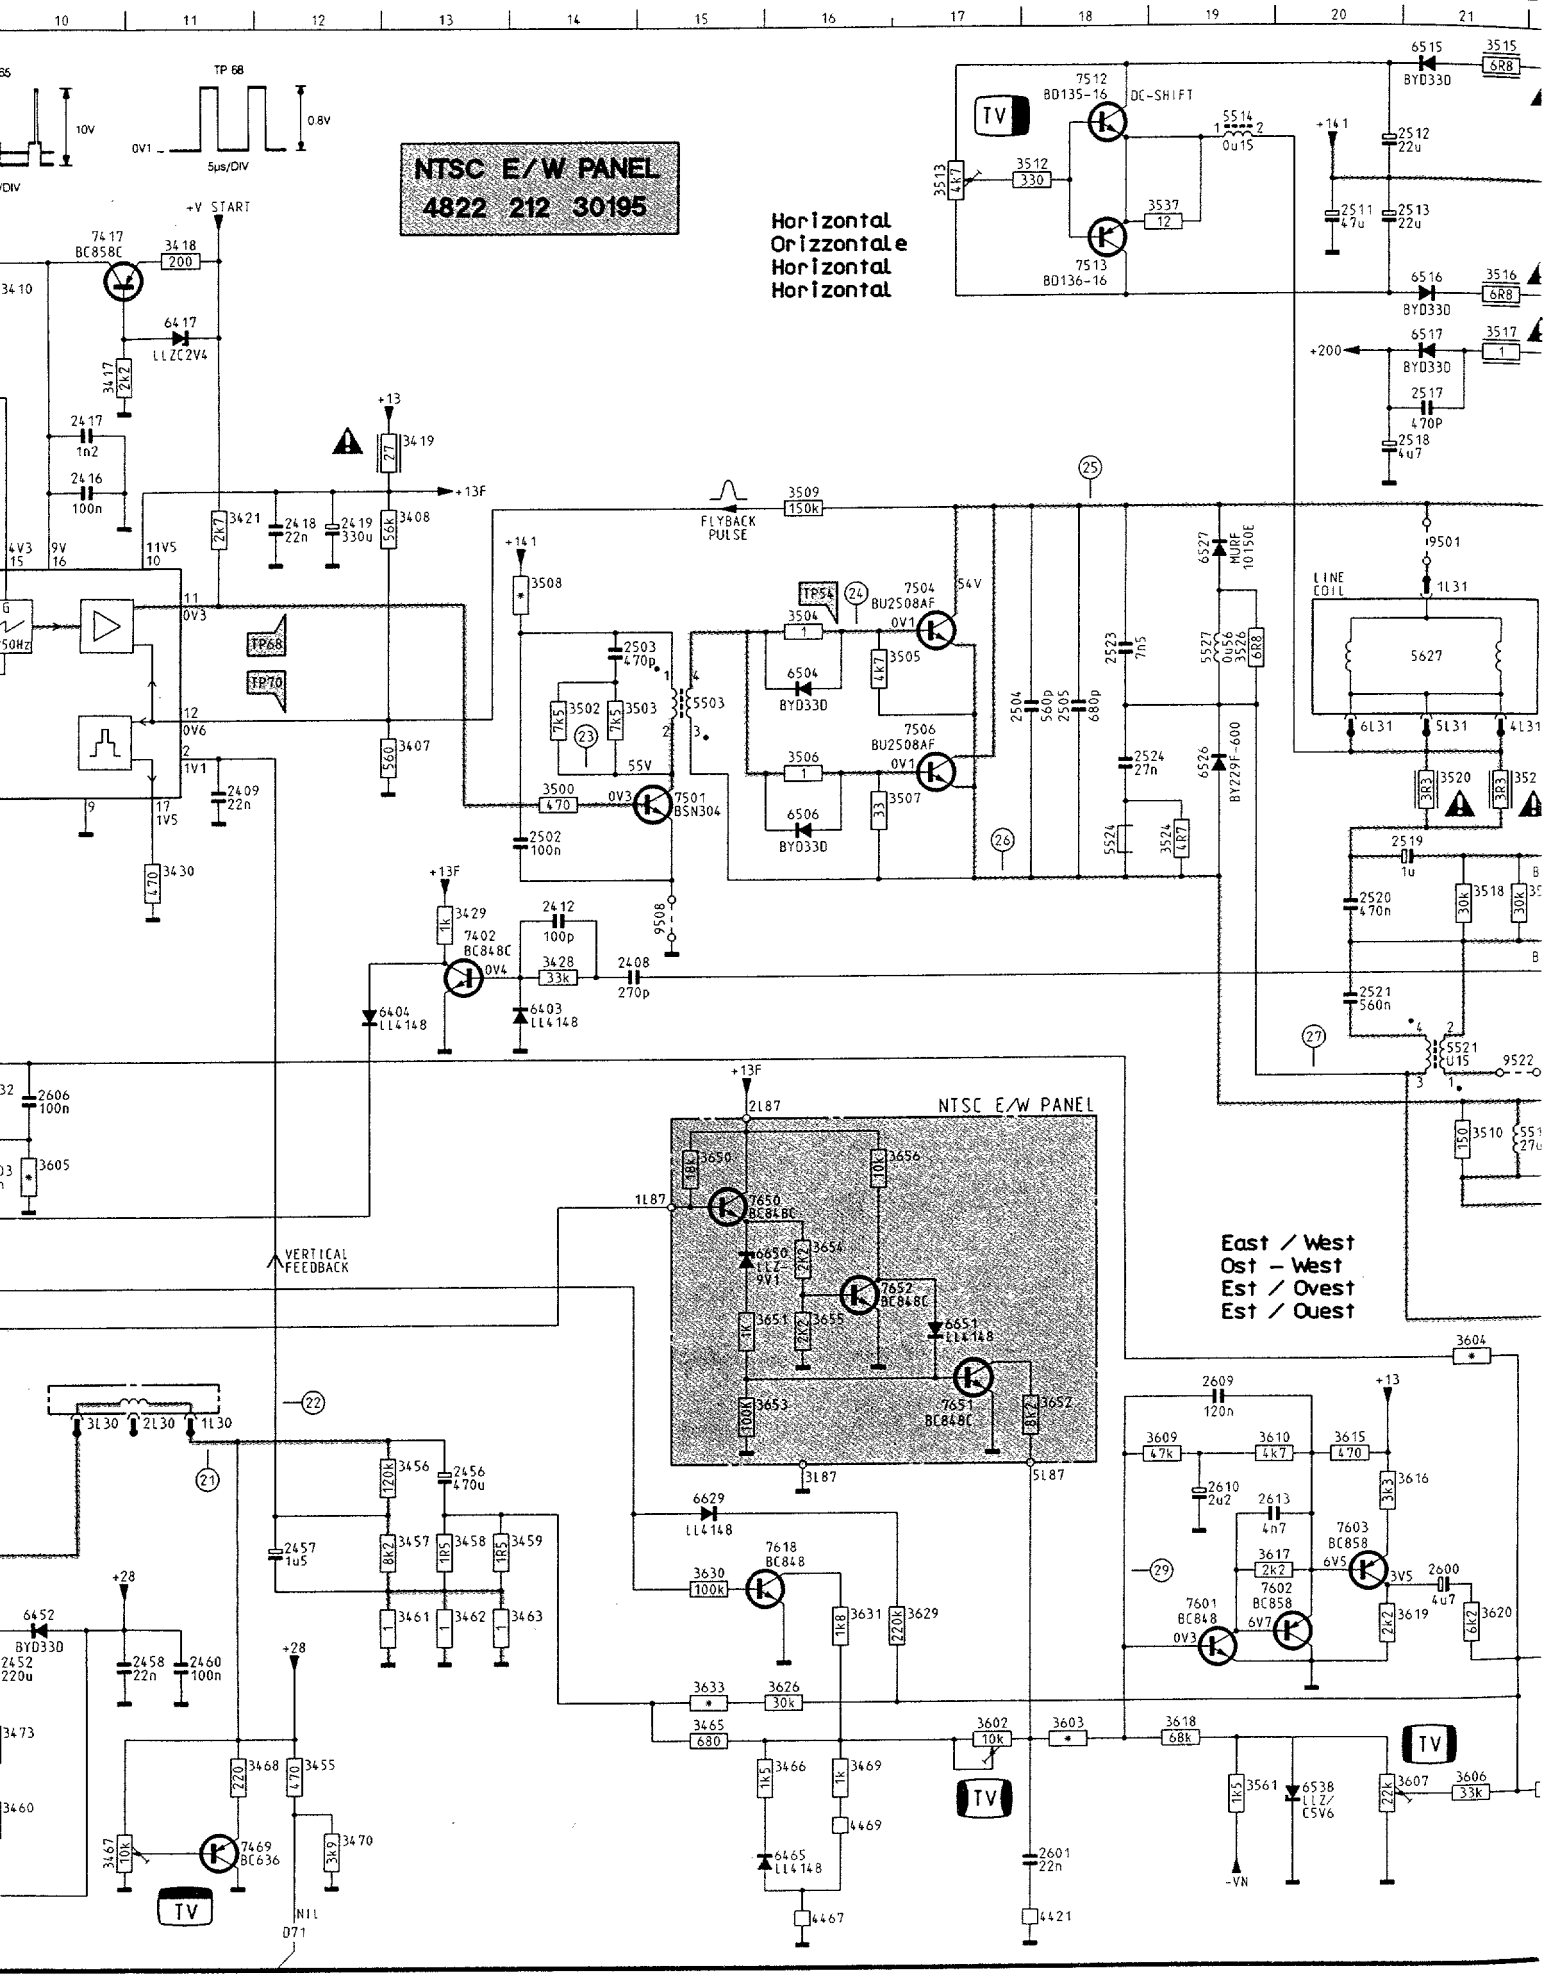
NTSC E/W PANEL
4822 212 30195
Horizontal
Orizzontale
Horizontal
Horizontal
NTSC E/W PANEL
East / West
Ost – West
Est / Ovest
Est / Ouest
VERTICAL FEEDBACK
FLYBACK PULSE
LINE COIL
TP 68
0.8V
5µs/DIV
10V
+V START
+13F
+141
+200
+28
-VN
TV
7512 BD135-16 DC-SHIFT
7513 BD136-16
7417 BC858C
6417 LLZC2V4
7504 BU2508AF
7506 BU2508AF
7501 BSN304
7402 BC848C
7650 BC848C
7652 BC848C
7651 BC848C
7618 BC848
7469 BC636
7603 BC858
7602 BC858
7601 BC848
6515 BYD33D
6516 BYD33D
6517 BYD33D
6504 BYD33D
6506 BYD33D
6527 MURF 10150E
6526 BYZ29F-600
6404 LL4148
6403 LL4148
6629 LL4148
6651 LL4148
6465 LL4148
6452 BYD33D
6650 LLZ 9V1
6538 LLZ/ C5V6
5627
5521 CU15
5514 0u15
5527 0u56
5526
5524
9501
9508
9522
0V1
0V3
0V4
0V6
1V1
1V5
5V5
6V5
6V7
11V5
54V
55V

Synchronisation

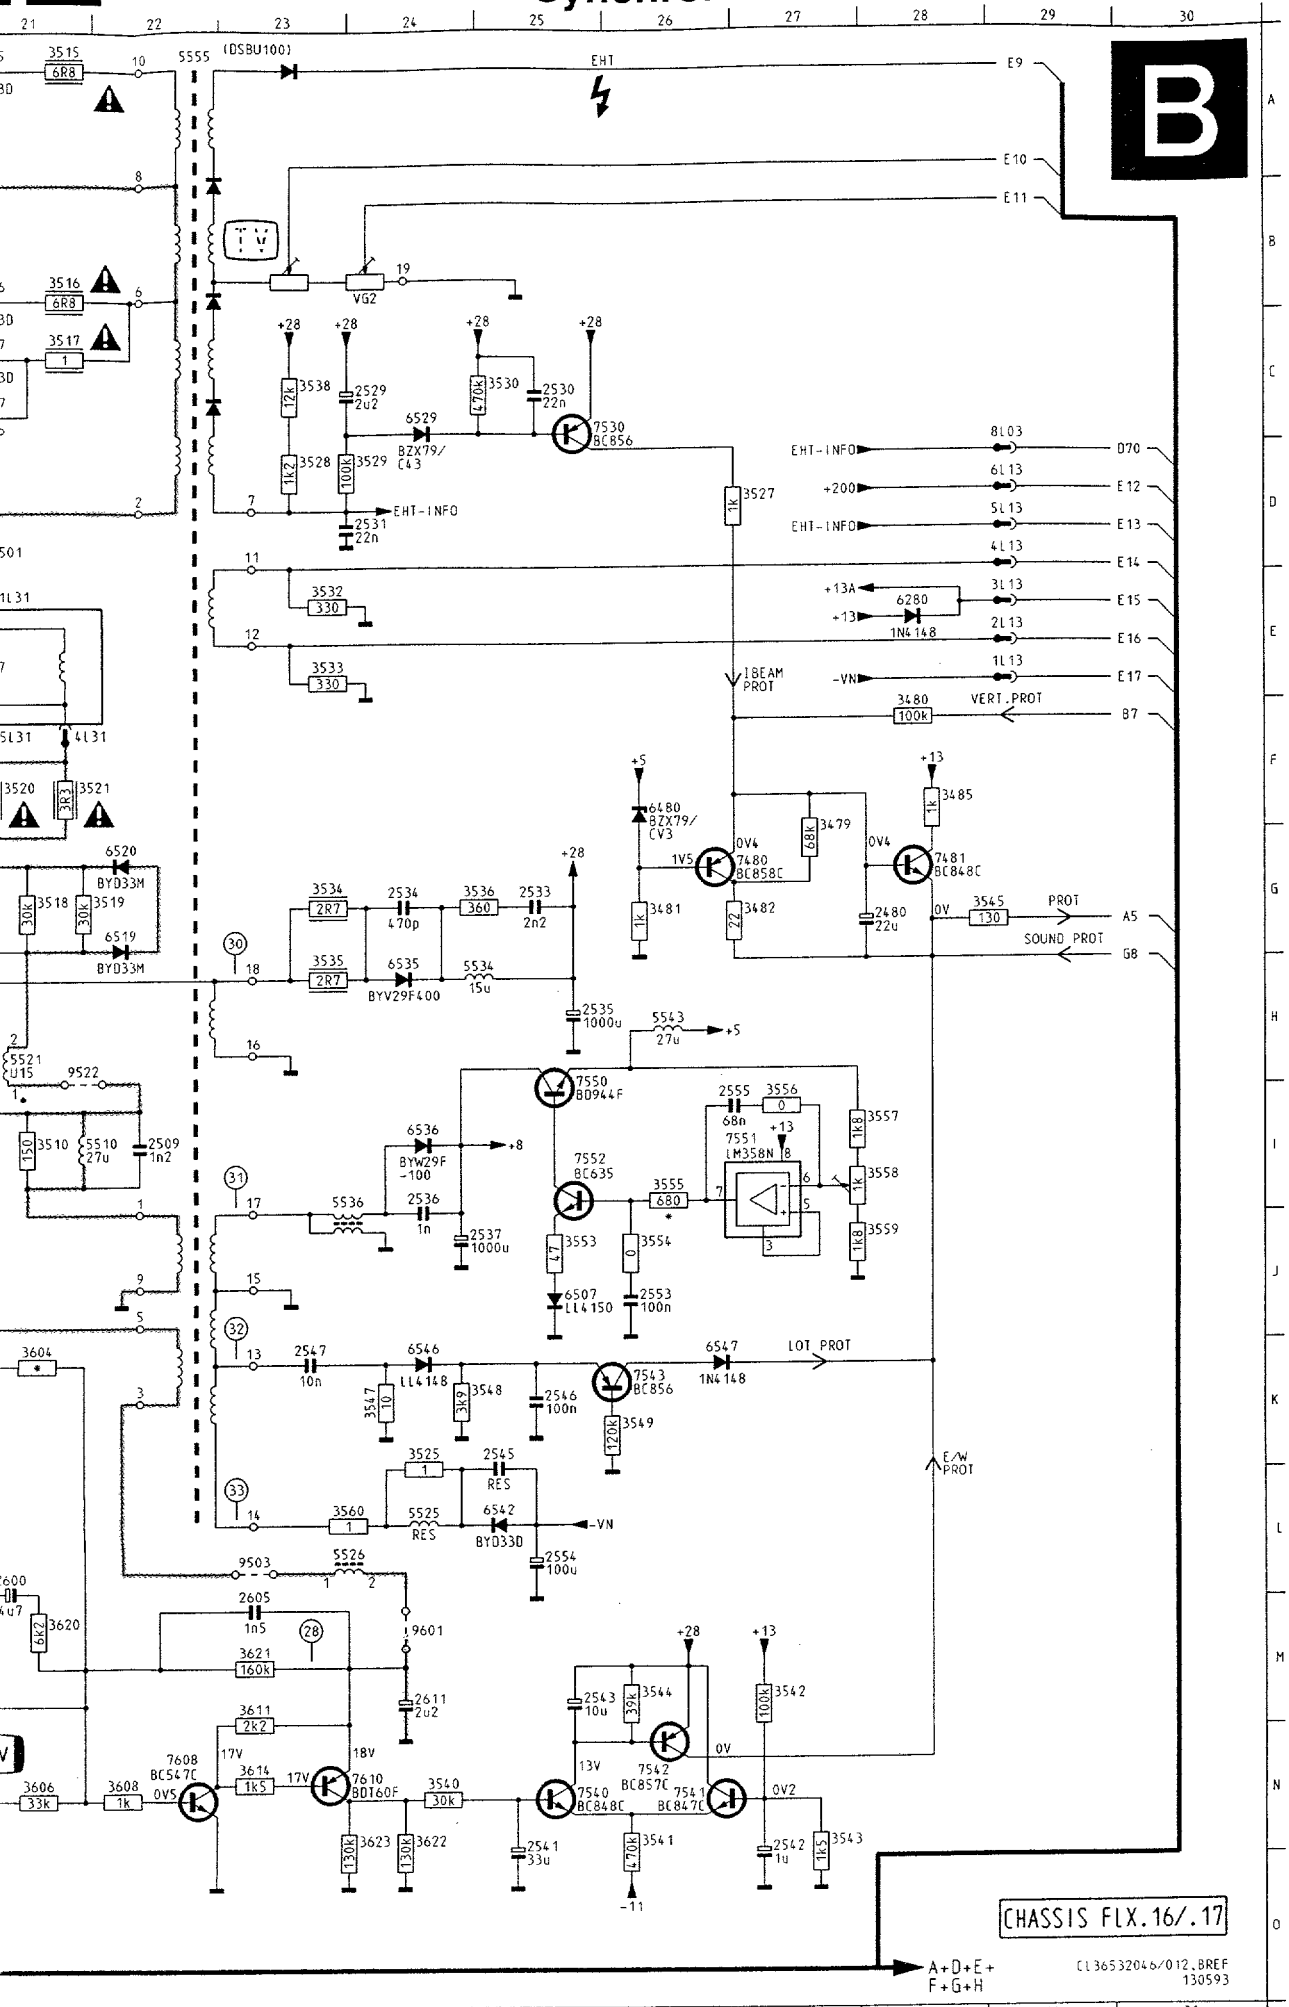

	2401	F 6	3481	G26	6417	
	2402	D 6	3482	G27	6440	
	2403	D 8	3483	F 5	6441	
	2404	C 6	3484	F 5	6451	
A	2405	D 6	3485	F28	6452	
	2406	C 9	3500	F14	6465	
	2408	H14	3502	F14	6480	
	2409	F11	3503	F14	6504	
	2410	I 7	3504	E16	6506	
	2411	H 8	3505	E16	6507	
	2412	G14	3506	F16	6515	
	2415	G 9	3507	F16	6516	
B	2416	D10	3508	E14	6517	
	2417	C10	3509	D16	6519	
	2418	D12	3510	I21	6520	
	2419	D12	3512	A18	6526	
	2450	M 5	3513	B17	6527	
	2451	M 5	3515	A21	6529	
	2452	M10	3516	B21	6535	
	2455	K 6	3517	C21	6536	
C	2456	L13	3518	G21	6538	
	2457	L12	3519	G21	6542	
	2458	M11	3520	F21	6546	
	2459	L 9	3521	F21	6547	
	2460	M11	3524	G19	6629	
	2480	G28	3525	K24	6650	
	2502	G14	3526	E19	6651	
D	2503	E14	3527	D27	7400	
	2504	F18	3528	D23	7402	
	2505	F18	3529	D24	7407	
	2509	J22	3530	C25	7417	
	2511	B20	3532	E23	7444	
	2512	A20	3533	E23	7445	
	2513	B20	3534	G23	7450	
	2517	C21	3535	H23	7451	
E	2518	D20	3536	G25	7469	
	2519	G21	3537	B19	7480	
	2520	G20	3538	C23	7481	
	2521	H20	3540	N24	7501	
	2523	E18	3541	N26	7504	
	2524	F18	3542	M27	7506	
	2529	C24	3543	N27	7512	
	2530	C25	3544	M26	7513	
F	2531	D24	3545	G29	7530	
	2533	G25	3547	K24	7540	
	2534	G24	3548	K24	7541	
	2535	H25	3549	K26	7542	
	2536	I24	3553	J25	7543	
	2537	J24	3554	J26	7550	
	2541	N25	3555	I26	7551	
G	2542	N27	3556	I27	7552	
	2543	M25	3557	I28	7601	
	2545	K25	3558	I28	7602	
	2546	K25	3559	J28	7603	
	2547	K23	3560	L23	7608	
	2553	J26	3561	N19	7610	
	2554	L25	3601	H 9	7616	
	2555	I27	3602	N17	7618	
H	2600	L21	3603	N18	7650	
	2601	O18	3604	K21	7651	
	2603	I 9	3605	I10	7652	
	2605	M23	3606	N21	9459	
	2606	I10	3607	N20	9473	
	2609	K19	3608	N22	9501	
	2610	L19	3609	K19	9503	
I	2611	M24	3610	K20	9508	
	2613	L20	3611	M23	9522	
	3402	D 7	3614	N23	9601	
	3403	D 8	3615	K20		
	3404	D 5	3616	L20		
	3405	C 9	3617	L20		
	3406	D 9	3618	N19		
	3407	F13	3619	M20		
J	3408	D13	3620	M21		
	3409	I 7	3621	M23		
	3410	B10	3622	N24		
	3411	H 7	3623	N24		
	3413	G 9	3626	M16		
	3414	G 6	3627	H 5		
	3415	G 5	3628	H 4		
K	3417	C10	3629	M17		
	3418	B11	3630	L15		
	3419	C13	3631	M16		
	3420	H 9	3632	H 9		
	3421	D11	3633	M15		
	3422	H 7	3634	I 5		
	3424	G 8	3650	I15		
L	3426	E 4	3651	J15		
	3428	H14	3652	K18		
	3429	G13	3653	K15		
	3430	G11	3654	J16		
	3439	E 4	3655	J16		
	3441	E 5	3656	I16		
	3442	E 5	4400	K 7		
	3444	D 4	4410	I 7		
M	3446	C 4	4412	H 7		
	3450	L 5	4421	O18		
	3451	L 5	4467	O16		
	3455	N12	4469	N16		
	3456	K13	5503	F15		
	3457	L13	5510	I21		
	3458	L13	5511	B 2		
	3459	L14	5514	A19		
N	3460	N10	5521	H21		
	3461	M13	5524	G18		
	3462	M13	5525	L24		
	3463	M14	5526	L23		
	3465	N15	5527	E19		
	3466	N16	5534	H25		
	3467	N10	5536	I23		
	3468	N11	5543	H26		
O	3469	N16	5555	A22		
	3470	N12	5627	E21		
	3473	M10	6280	E28		
	3479	F27	6403	H14		
	3480	F28	6404	H12		

D

Chrominance processing
Chrominanz-Prozessor
Processore della crominanza
Traitement chrominance

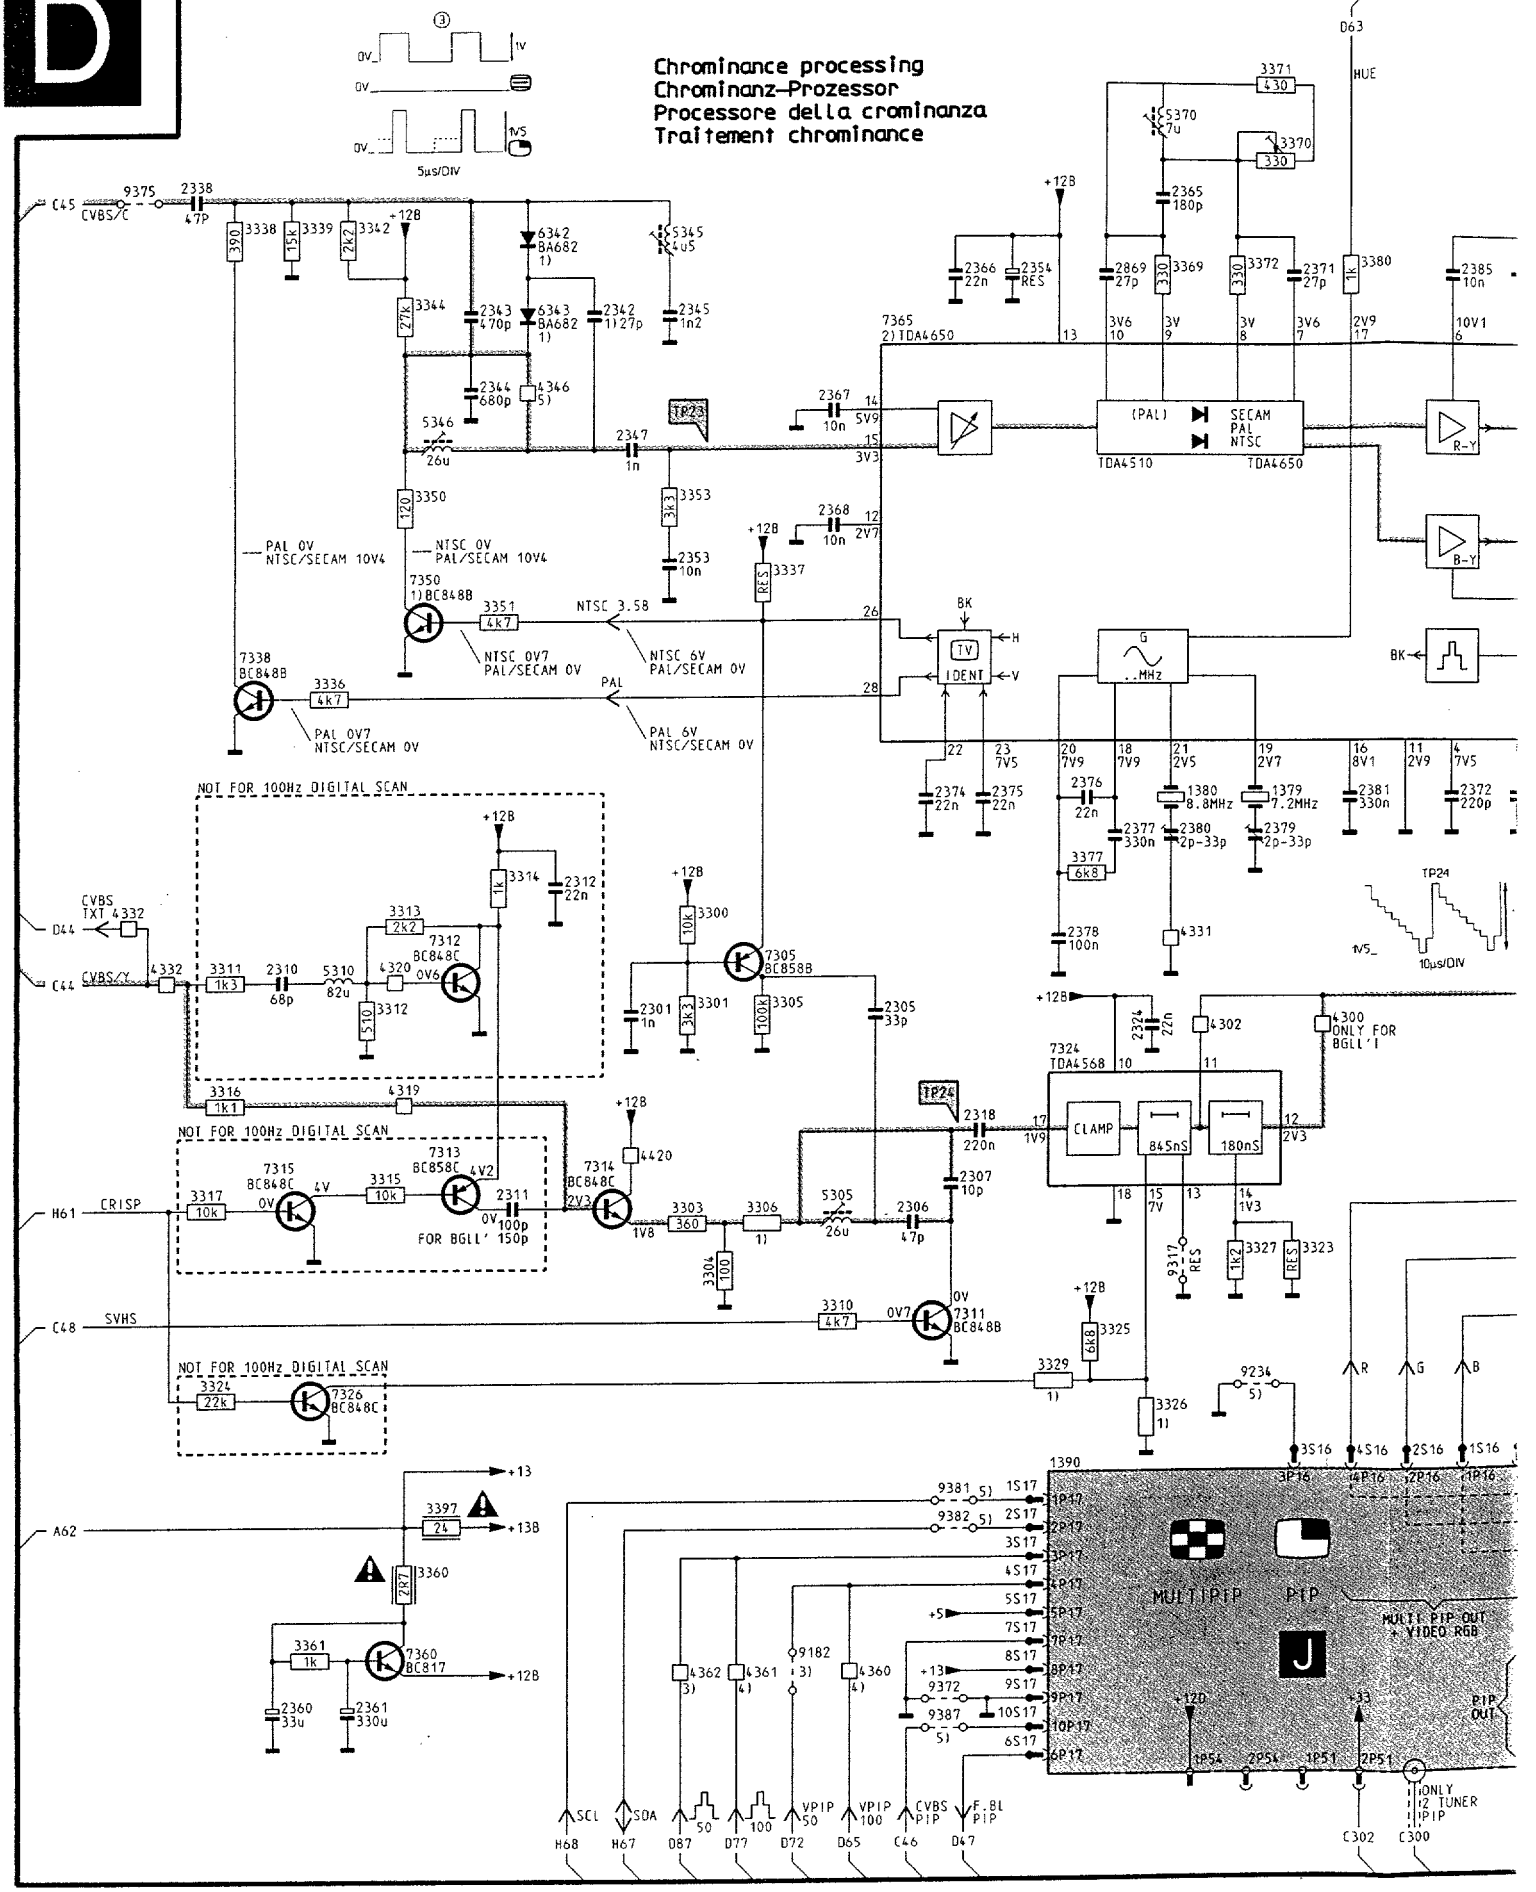

Traitement vidéo

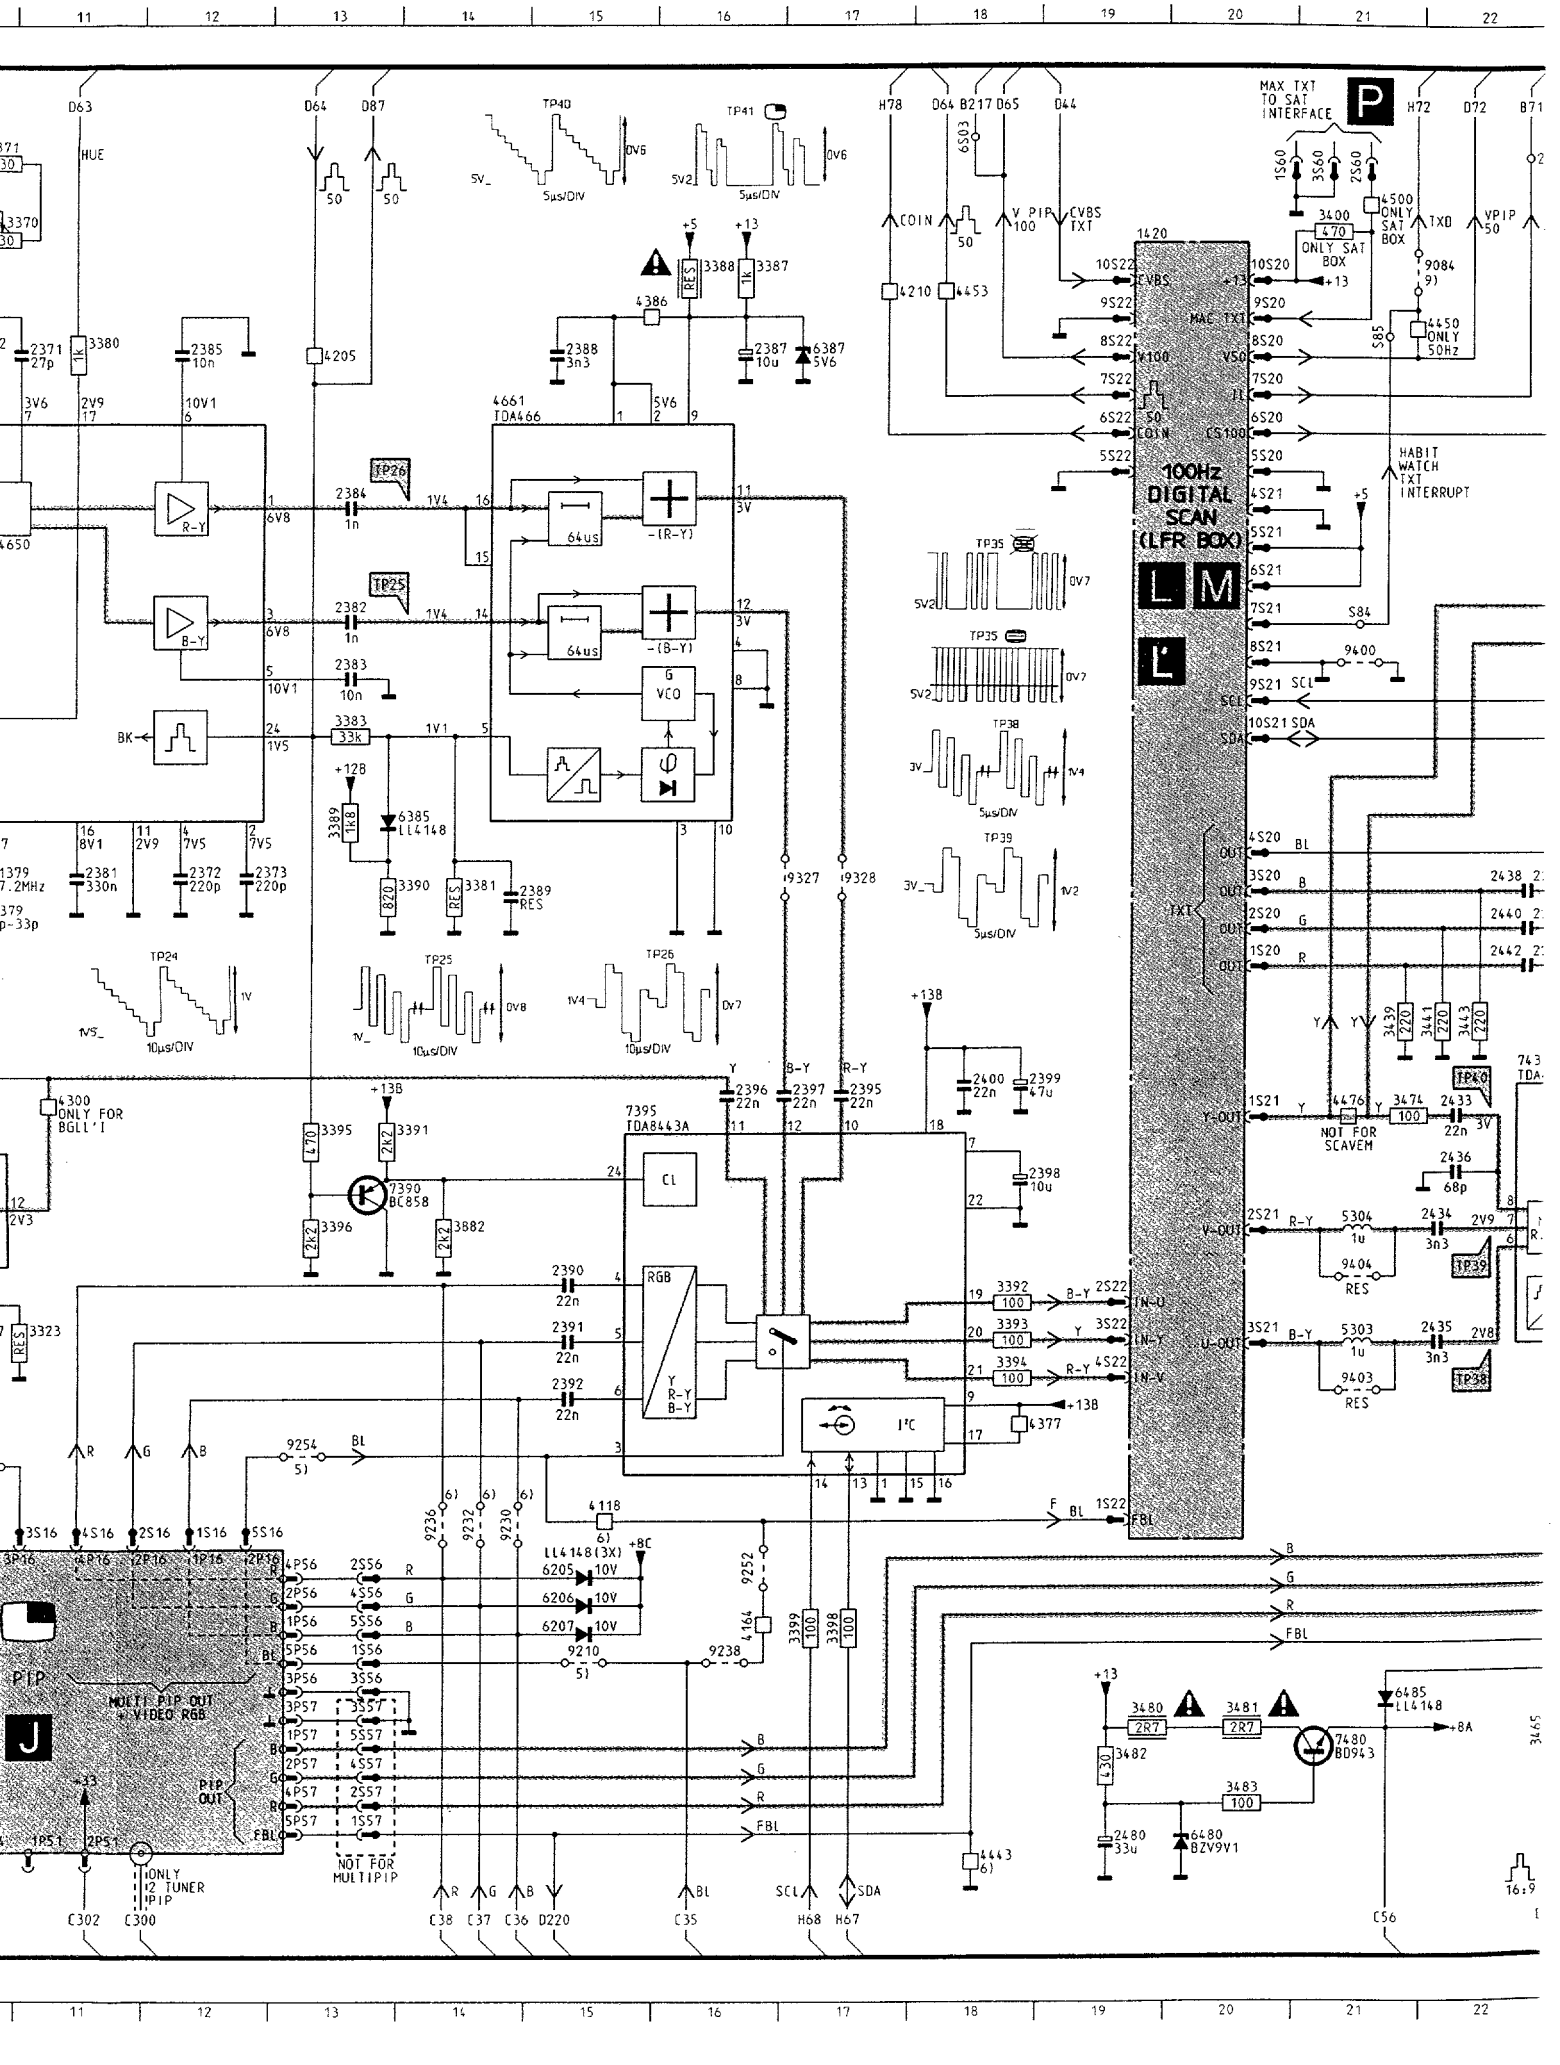

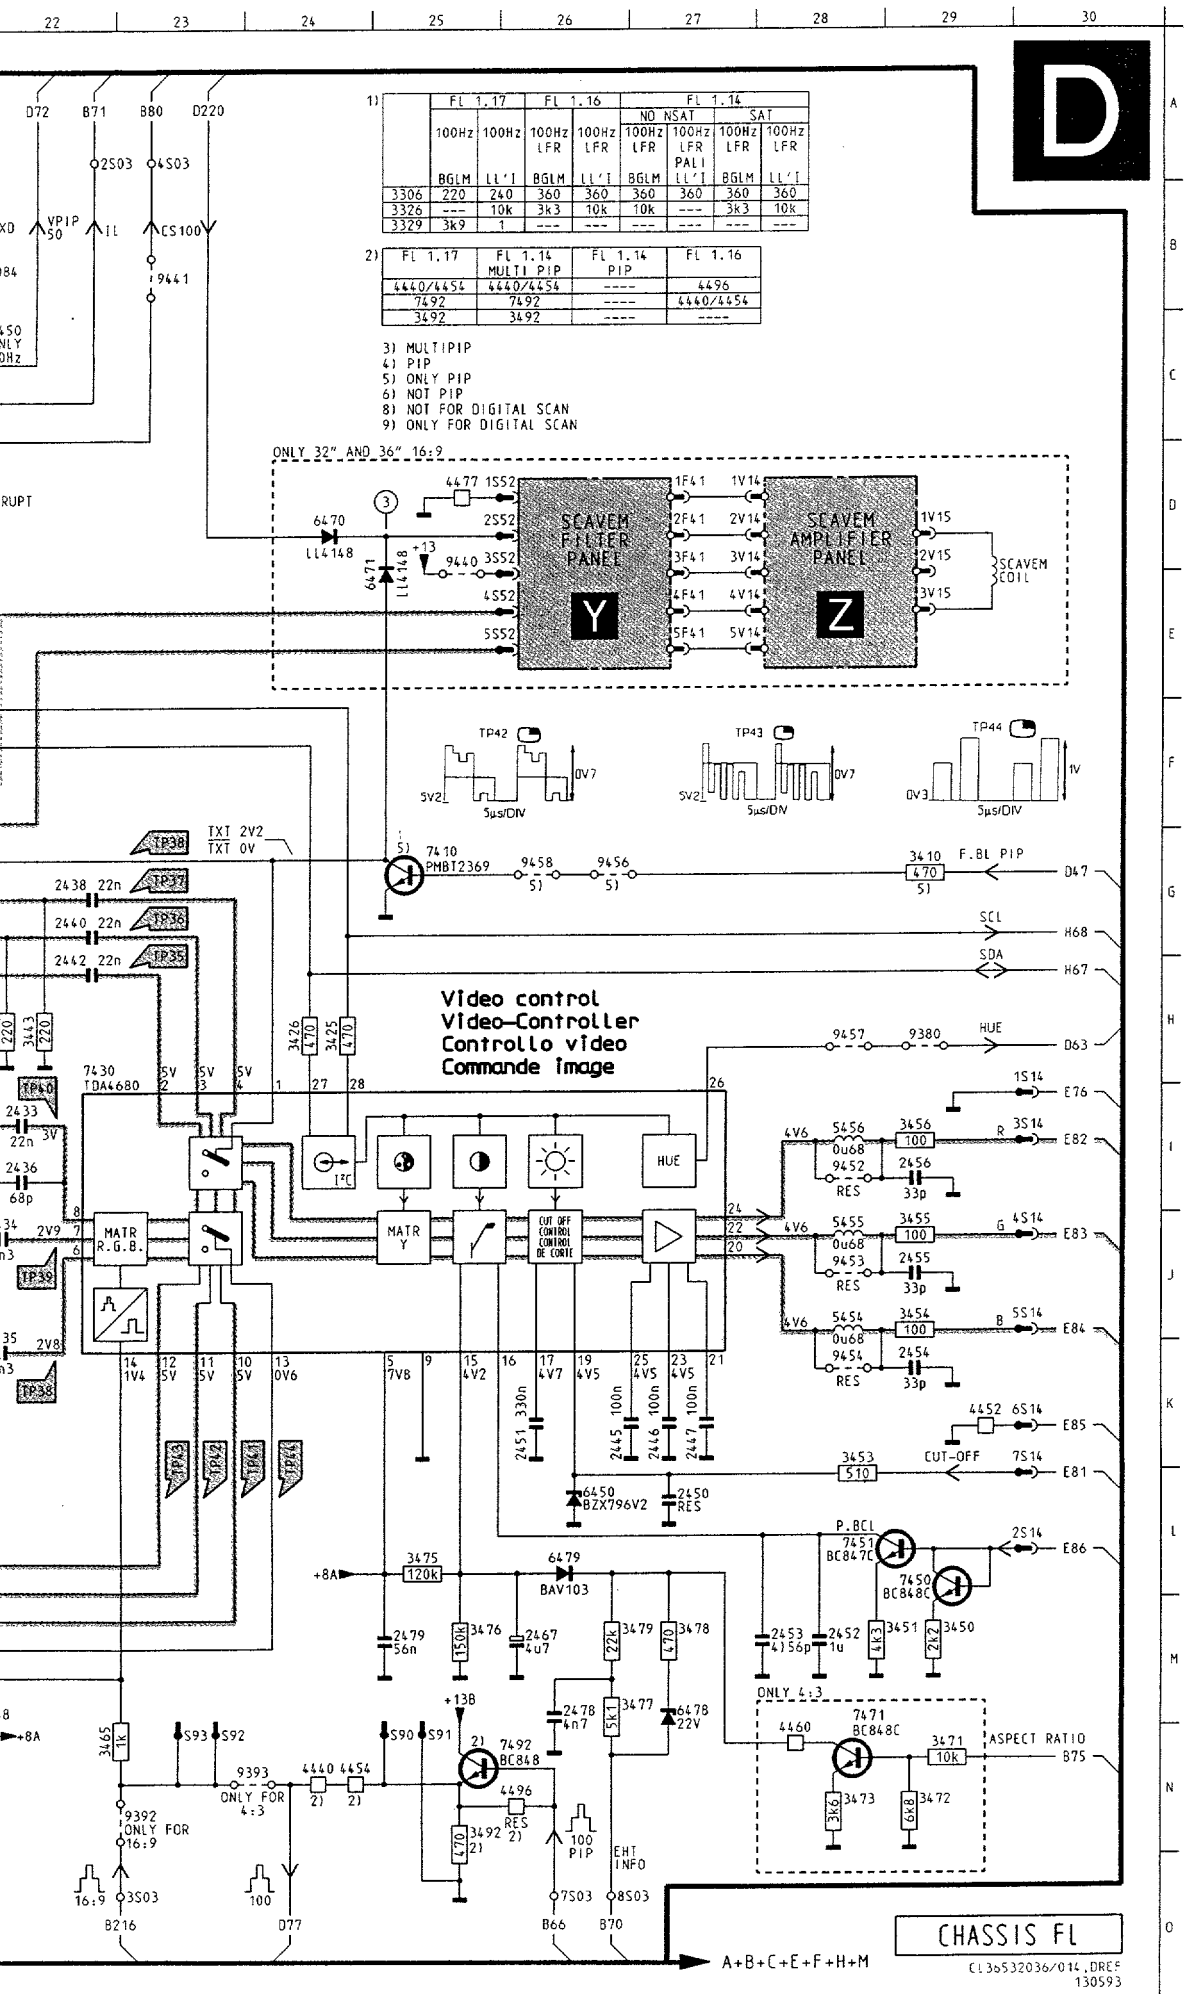

1379	G10	3388	B16	9084	B21
1380	G10	3389	F13	9182	N 7
1390	L 9	3390	G13	9210	M15
1420	B19	3391	I13	9230	L14
2301	I 5	3392	J18	9232	L14
2305	I 7	3393	J18	9234	K10
2306	J 8	3394	K18	9236	L14
2307	J 8	3395	I13	9238	M16
2310	H 3	3396	J13	9252	L16
2311	J 4	3397	L 4	9254	K13
2312	H 5	3398	M17	9317	K10
2318	I 8	3399	M17	9327	G17
2324	I 9	3400	B21	9328	G17
2338	B 2	3410	G29	9372	N 8
2342	C 5	3425	H24	9375	B 1
2343	C 4	3426	H24	9380	H29
2344	D 4	3439	H21	9381	L 8
2345	C 6	3441	H22	9382	M 8
2347	D 5	3443	H22	9387	N 8
2353	E 6	3450	M29	9392	N23
2354	C 8	3451	M29	9393	N24
2360	N 3	3453	K28	9400	E21
2361	N 3	3454	J29	9403	K21
2365	B10	3455	J29	9404	J21
2366	C 8	3456	I29	9440	D25
2367	D 7	3465	N22	9441	B23
2368	E 7	3471	N29	9452	I28
2371	C11	3472	N29	9453	J28
2372	G12	3473	N28	9454	K28
2373	G12	3474	I21	9456	G26
2374	G 8	3475	L25	9457	H28
2375	G 8	3476	M25	9458	G26
2376	G 9	3477	M26		
2377	G 9	3478	M27		
2378	H 9	3479	M26		
2379	G10	3480	M19		
2380	G10	3481	M20		
2381	G11	3482	N19		
2382	E13	3483	N20		
2383	E13	3492	N25		
2384	D13	3882	J14		
2385	C12	4118	L15		
2387	C16	4164	M16		
2388	C15	4205	C13		
2389	G14	4210	B17		
2390	J15	4300	I11		
2391	J15	4302	I10		
2392	K15	4319	I 4		
2395	I17	4320	H 3		
2396	I16	4331	H10		
2397	I17	4332	H 2		
2398	I18	4332	H 1		
2399	I18	4346	D 5		
2400	I18	4360	N 7		
2433	I22	4361	N 6		
2434	J22	4362	N 6		
2435	J22	4377	K18		
2436	I22	4386	B15		
2438	G22	4420	J 5		
2440	G22	4440	N24		
2442	H22	4443	O18		
2445	K26	4450	C22		
2446	K27	4452	K29		
2447	K27	4453	B18		
2450	L27	4454	N24		
2451	K26	4460	N28		
2452	M28	4476	I21		
2453	M28	4477	D25		
2454	K29	4496	N26		
2455	J29	4500	B21		
2456	I29	4661	C14		
2467	M26	5303	K21		
2478	M26	5304	J21		
2479	M25	5305	J 7		
2480	N19	5310	H 3		
2869	C 9	5345	C 6		
3300	H 6	5346	D 4		
3301	H 6	5370	B10		
3303	J 6	5454	J28		
3304	K 6	5455	J28		
3305	H 6	5456	I28		
3306	J 6	6205	L15		
3310	K 7	6206	M15		
3311	H 2	6207	M15		
3312	H 3	6342	C 5		
3313	H 4	6343	C 5		
3314	G 4	6385	F13		
3315	J 3	6387	C17		
3316	I 2	6450	L26		
3317	J 2	6470	D24		
3323	J11	6471	E25		
3324	K 2	6478	M27		
3325	K 9	6479	L26		
3326	L 9	6480	N20		
3327	J10	6485	M21		
3329	K 9	7305	H 6		
3336	F 3	7311	K 8		
3337	E 6	7312	H 4		
3338	B 2	7313	J 4		
3339	B 3	7314	J 5		
3342	B 3	7315	J 3		
3344	C 4	7324	I 9		
3350	D 4	7326	L 3		
3351	E 4	7338	F 2		
3353	D 6	7350	E 4		
3360	M 4	7360	N 4		
3361	N 3	7365	C 7		
3369	C10	7390	I13		
3370	B10	7395	I15		
3371	A10	7410	G25		
3372	C10	7430	H22		
3377	G 9	7450	L29		
3380	C11	7451	L28		
3381	G14	7471	M28		
3383	F13	7480	N21		
3387	B16	7492	N26		

B16	9084	B21
F13	9182	N 7
G13	9210	M15
I13	9230	L14
J18	9232	L14
J18	9234	K10
K18	9236	L14
I13	9238	M16
J13	9252	L16
L 4	9254	K13
M17	9317	K10
M17	9327	G17
B21	9328	G17
G29	9372	N 8
H24	9375	B 1
H24	9380	H29
H21	9381	L 8
H22	9382	M 8
H22	9387	N 8
M29	9392	N23
M29	9393	N24
K28	9400	E21
J29	9403	K21
J29	9404	J21
I29	9440	D25
N22	9441	B23
N29	9452	I28
N29	9453	J28
N28	9454	K28
I21	9456	G26
L25	9457	H28
M25	9458	G26

M26
M27
M26
M19
M20
N19
N20
N25
J14
L15
M16
C13
B17
I11
I10
I 4
H 3
H10
H 2
H 1
D 5
N 7
N 6
N 6
K18
B15
J 5
N24
O18
C22
K29
B18
N24
N28
I21
D25
N26
B21
C14
K21
J21
J 7
H 3
C 6
D 4
B10
J28
J28
I28
L15
M15
M15
C 5
C 5
F13
C17
L26
D24
E25
M27
L26
N20
M21
H 6
K 8
H 4
J 4
J 5
J 3
I 9
L 3
F 2
E 4
N 4
C 7
I13
I15
G25
H22
L29
L28
M28
N21
N26

Synchronization / Synchronisie

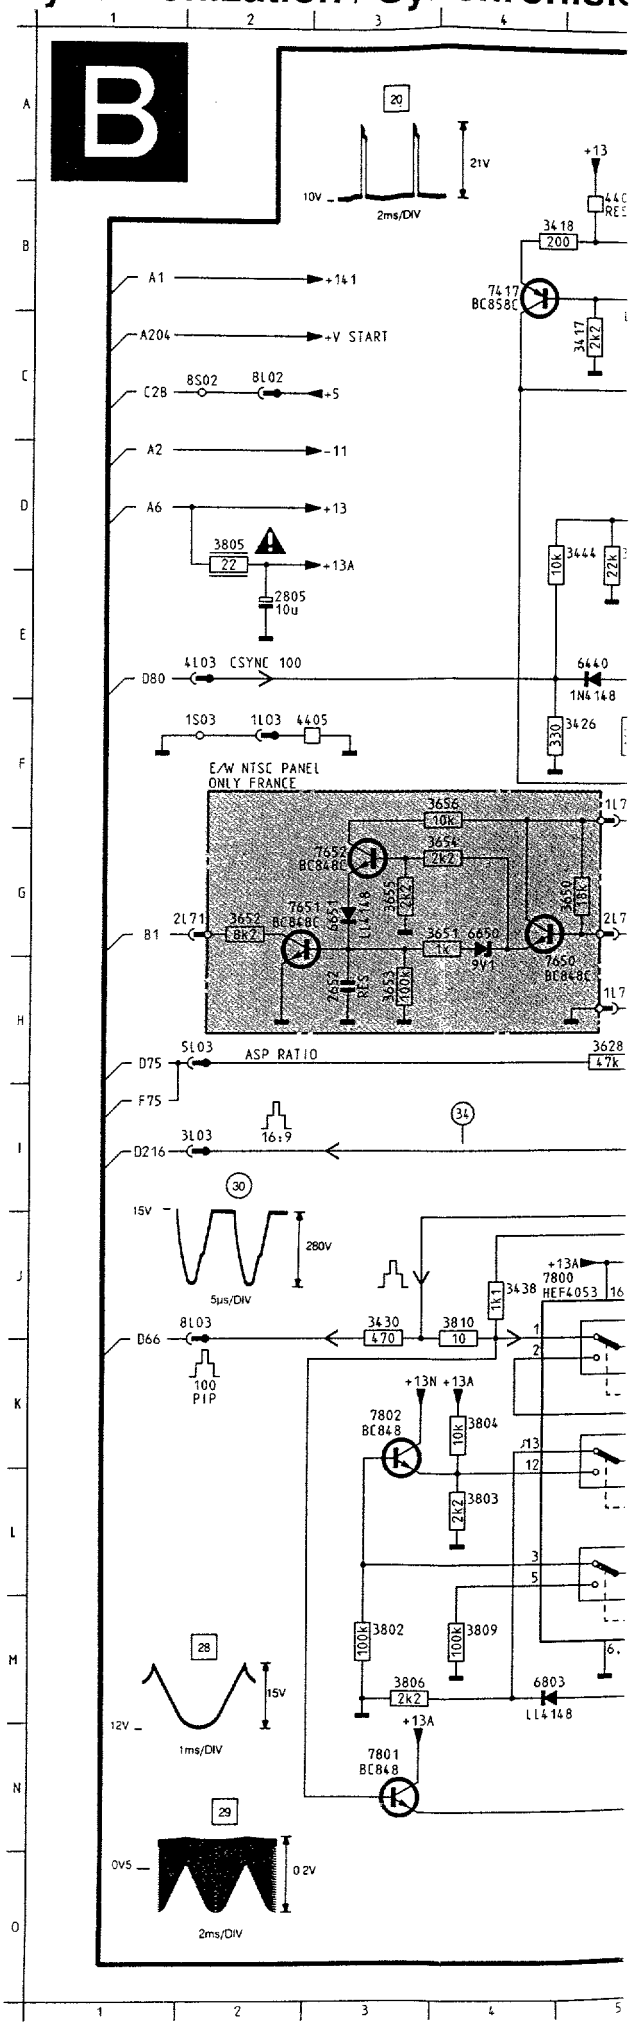

chronisierung /

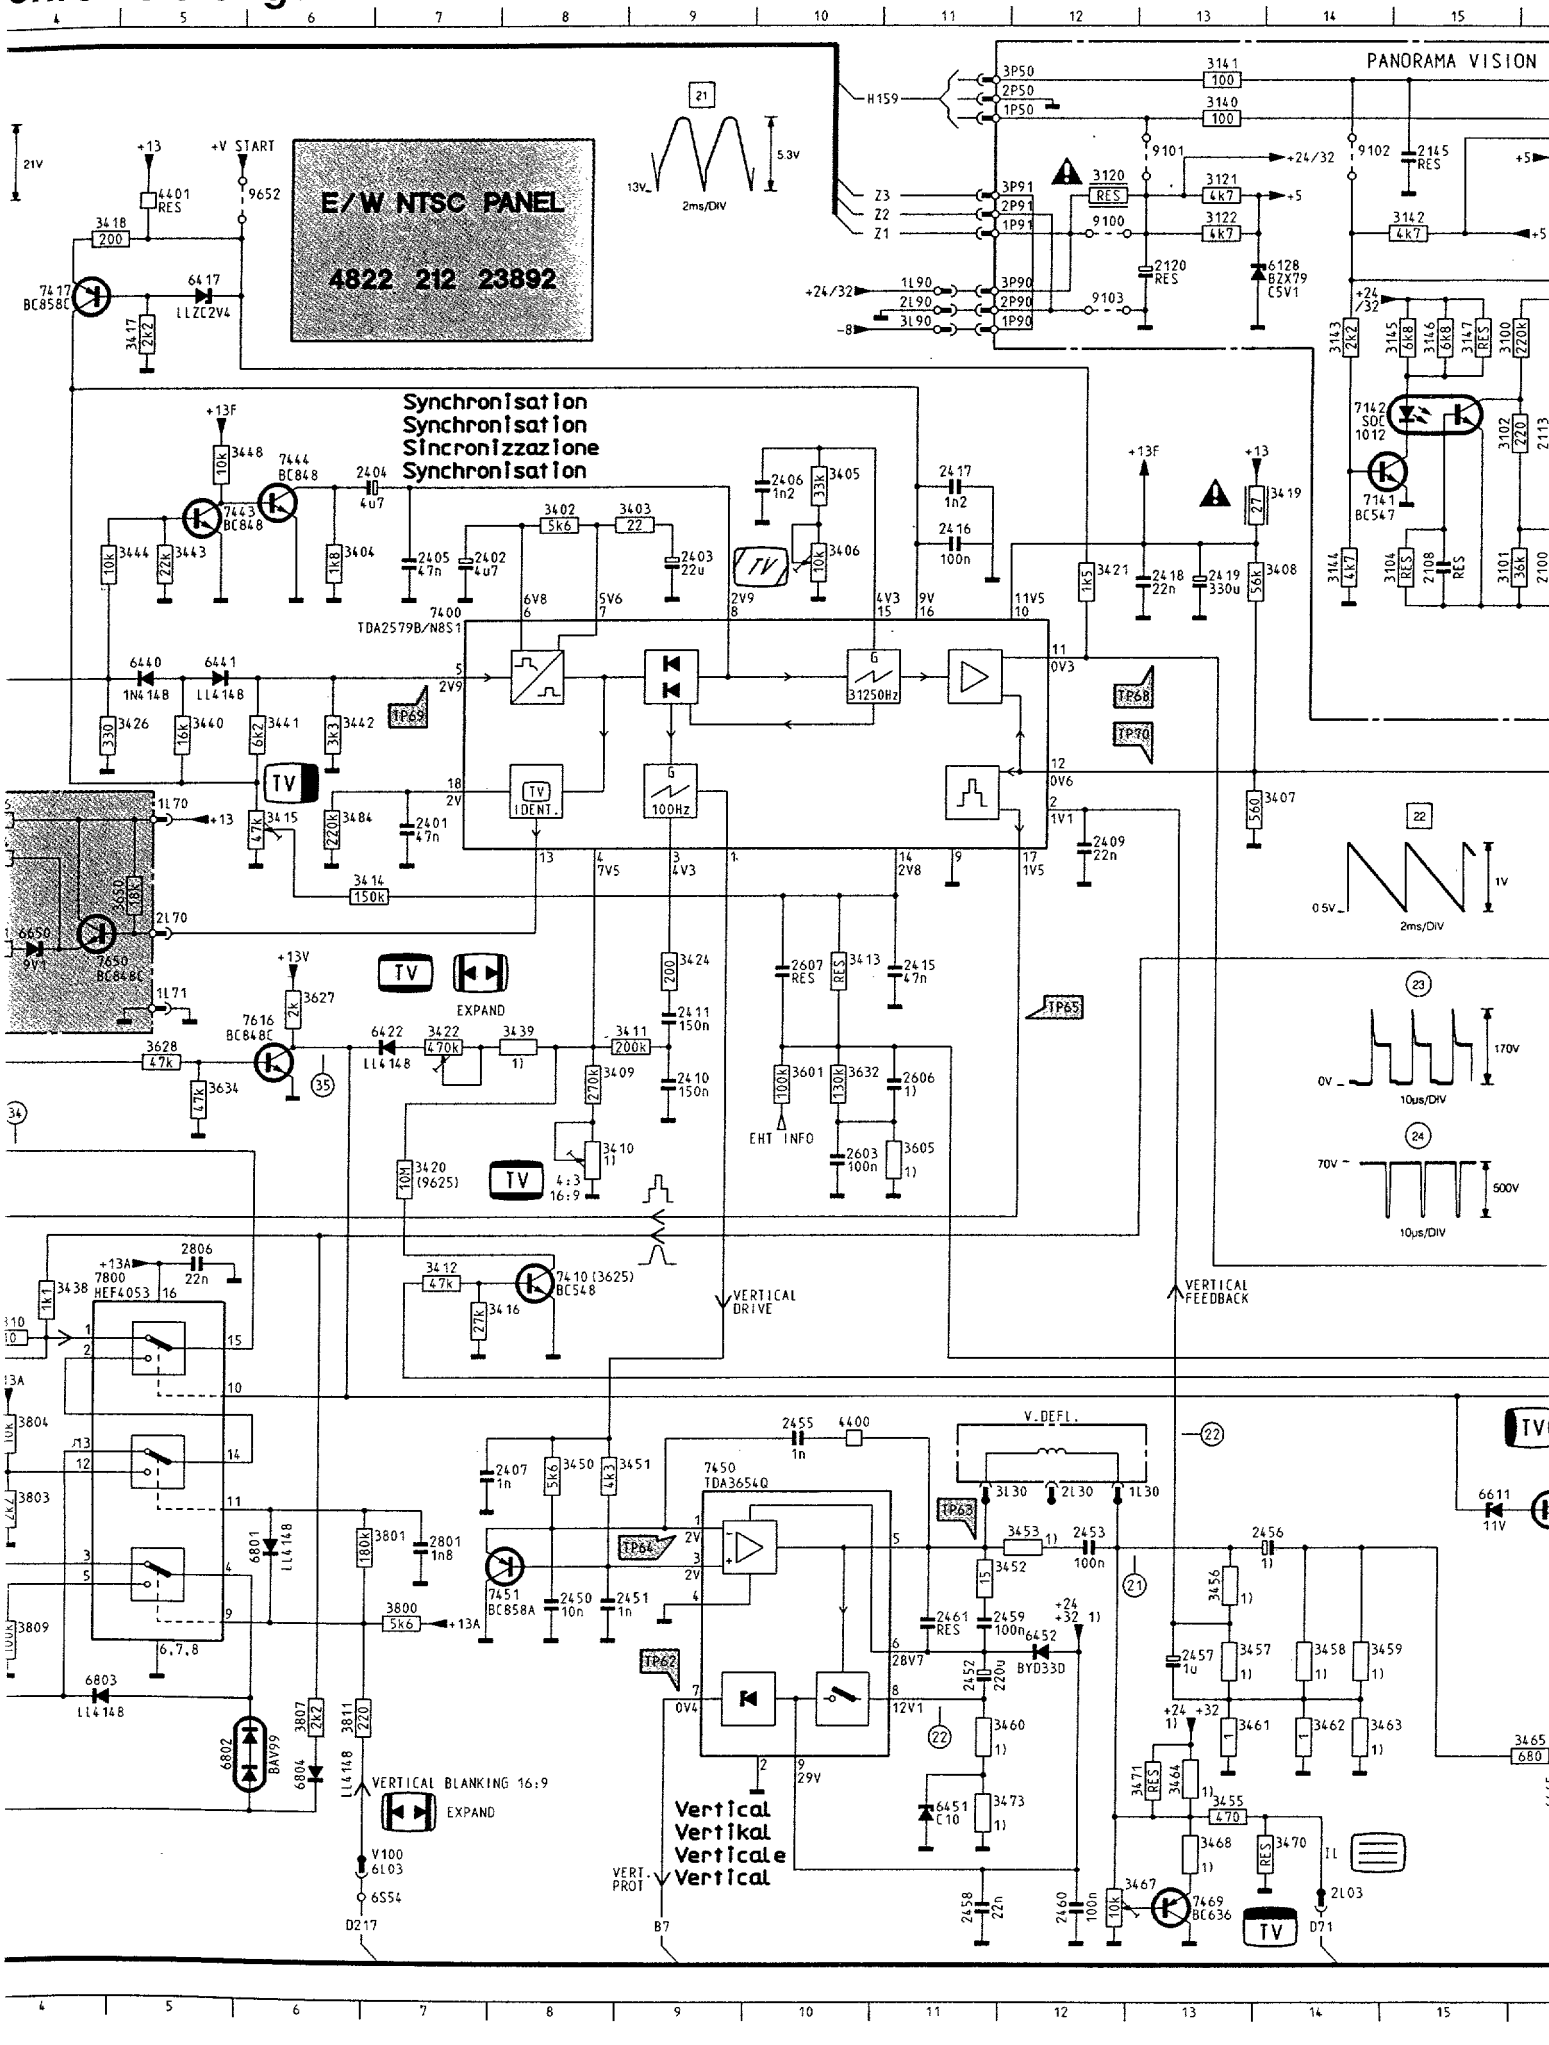

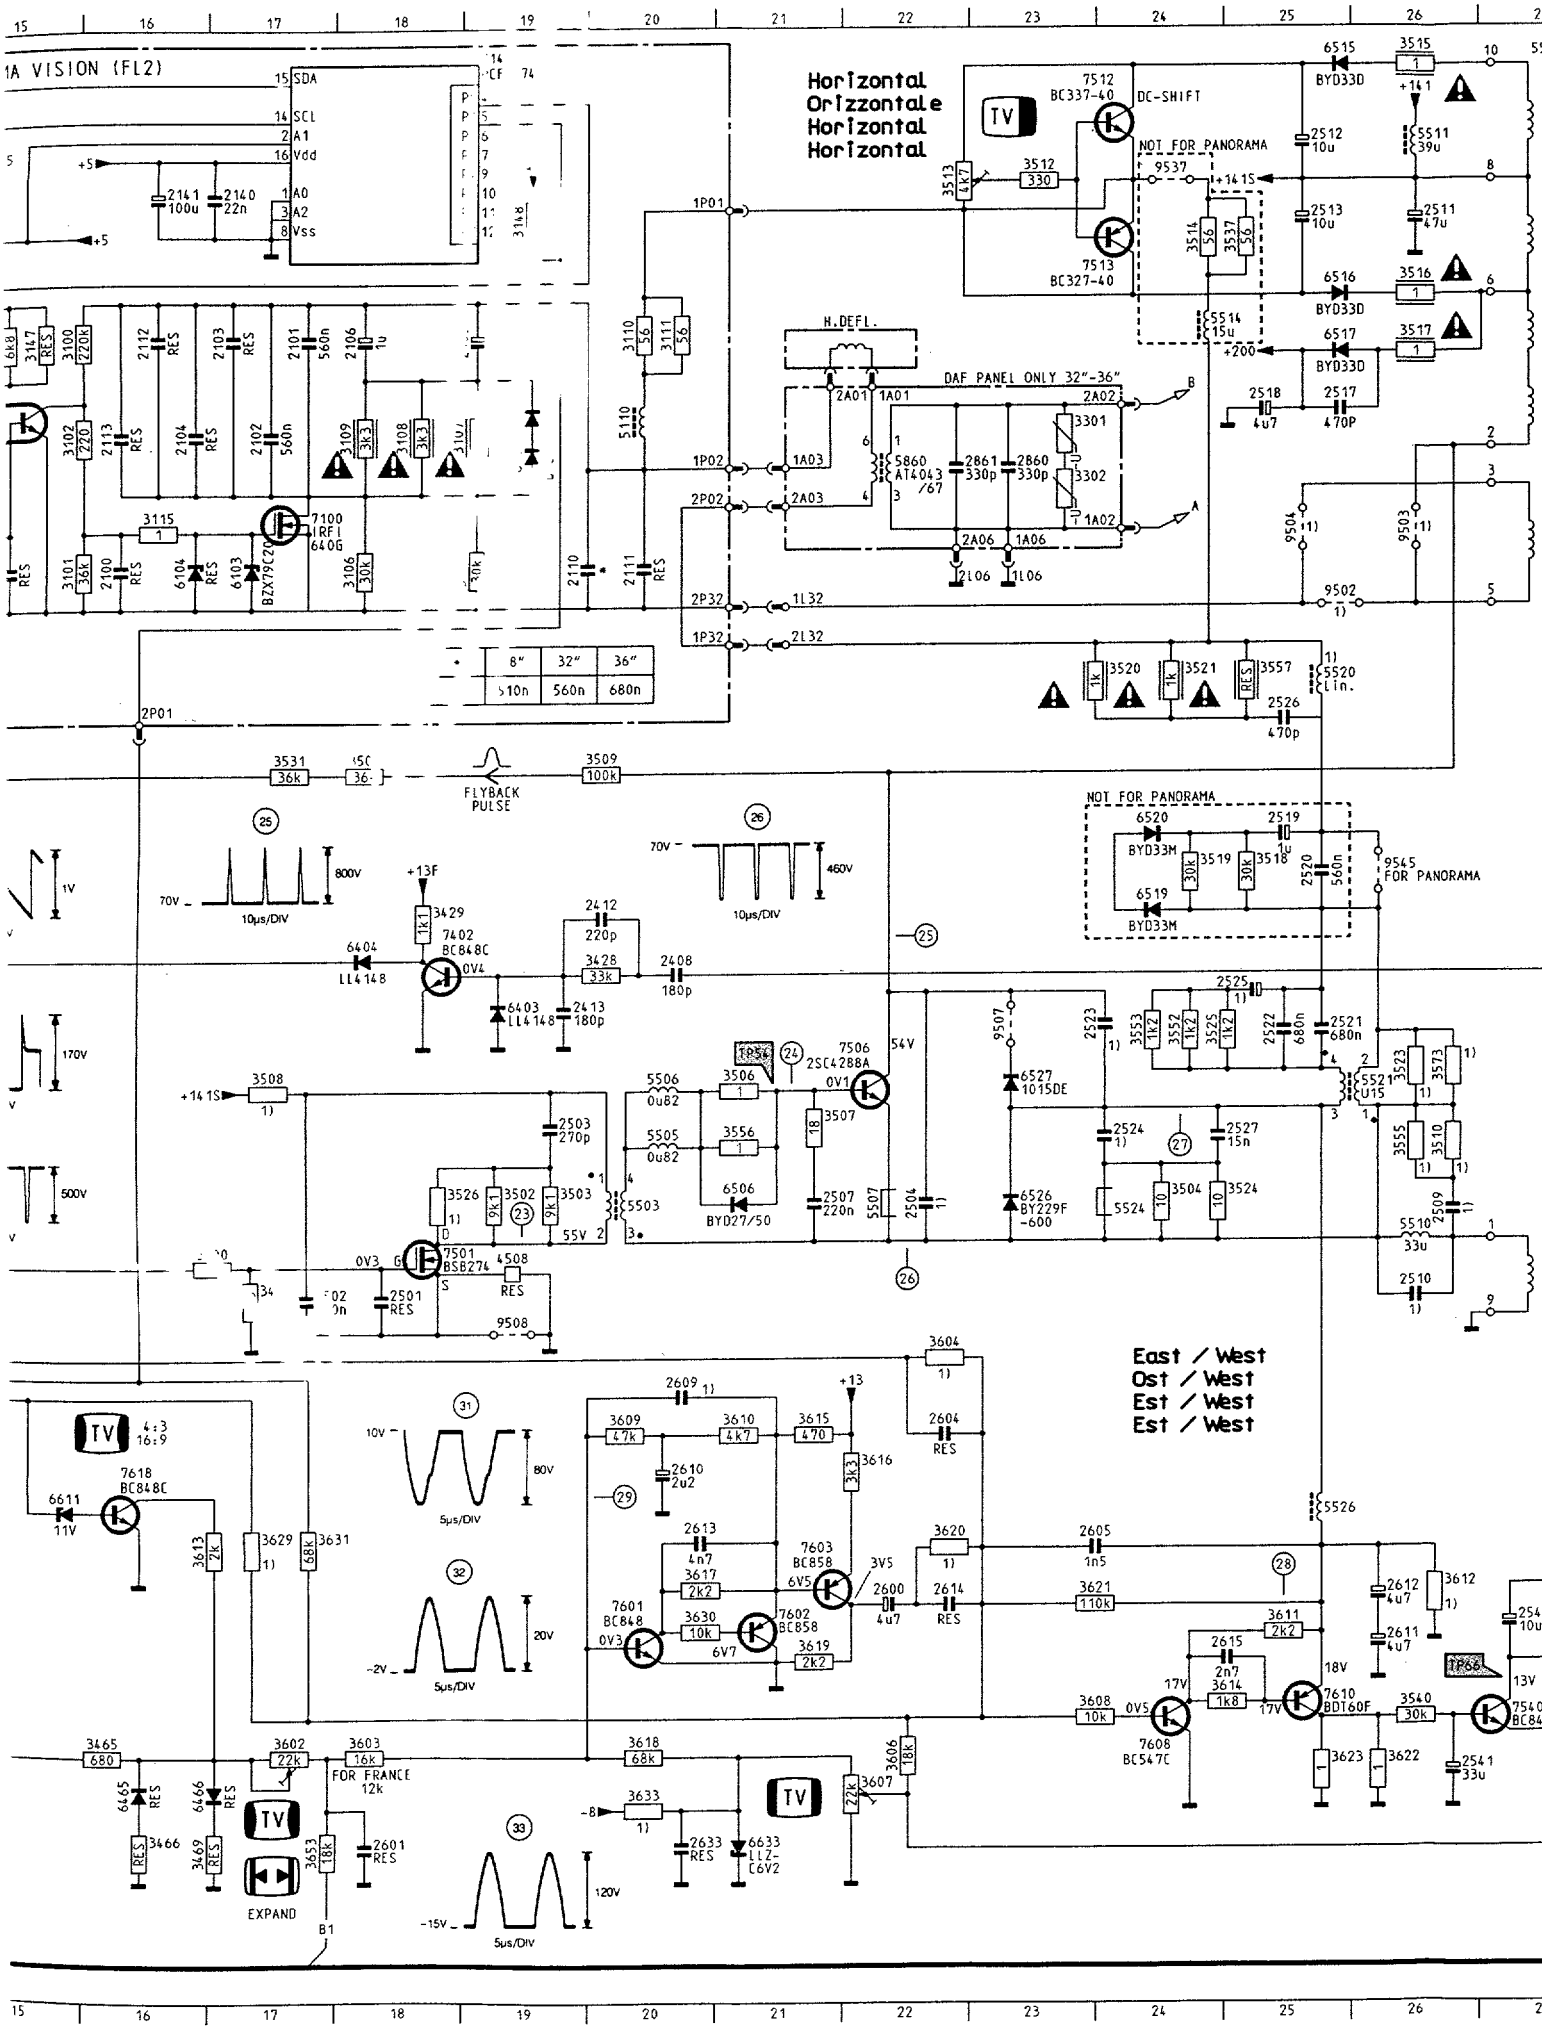
Horizontal
Orizzontale
Horizontal
Horizontal
East / West
Ost / West
Est / West
Est / West
NOT FOR PANORAMA
DAF PANEL ONLY 32"-36"
FLYBACK PULSE
FOR FRANCE 12k
EXPAND
H.DEFL.
DC-SHIFT
FOR PANORAMA
8" 32" 36"
>10n 560n 680n

Synchronisation

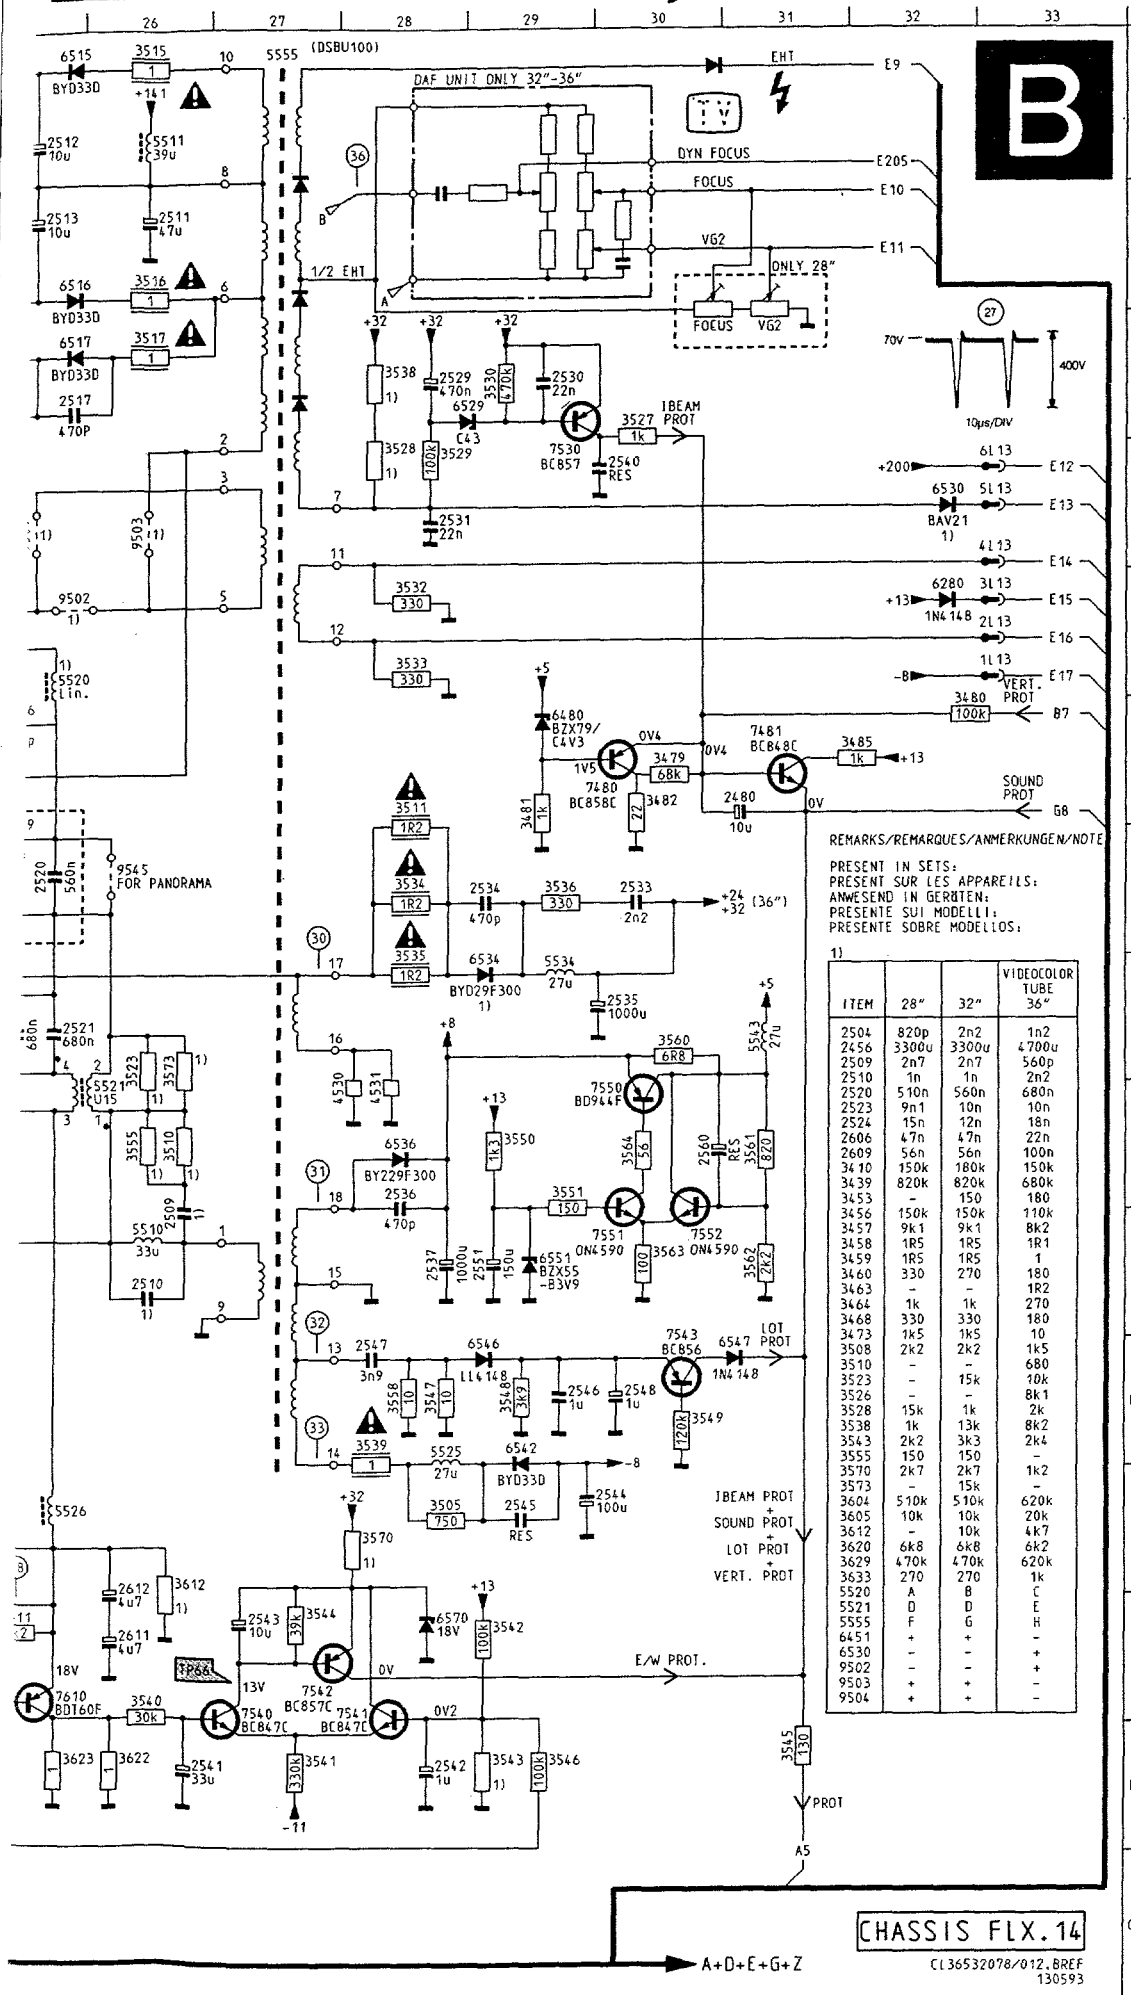

ITEM	28"	32"	VIDEOCOLOR TUBE 36"
2504	820p	2n2	1n2
2456	3300u	3300u	4700u
2509	2n7	2n7	560p
2510	1n	1n	2n2
2520	510n	560n	680n
2523	9n1	10n	10n
2524	15n	12n	18n
2606	47n	47n	22n
2609	56n	56n	100n
3410	150k	180k	150k
3439	820k	820k	680k
3453	-	150	180
3456	150k	150k	110k
3457	9k1	9k1	8k2
3458	1R5	1R5	1R1
3459	1R5	1R5	1
3460	330	270	180
3463	-	-	1R2
3464	1k	1k	270
3468	330	330	180
3473	1k5	1k5	10
3508	2k2	2k2	1k5
3510	-	-	680
3523	-	15k	10k
3526	-	-	8k1
3528	15k	1k	2k
3538	1k	13k	8k2
3543	2k2	3k3	2k4
3555	150	150	-
3570	2k7	2k7	1k2
3573	-	15k	-
3604	510k	510k	620k
3605	10k	10k	20k
3612	-	10k	4k7
3620	6k8	6k8	6k2
3629	470k	470k	620k
3633	270	270	1k
5520	A	B	C
5521	D	D	E
5555	F	G	H
6451	+	+	-
6530	-	-	+
9502	-	-	+
9503	+	+	-
9504	+	+	-

DN45	J30	3108	C18	3536	G29	6452	M12
DN45	J30	3109	C18	3537	B25	6465	N16
2100	D16	3110	C20	3538	C28	6466	N16
2101	C17	3111	C20	3539	K28	6480	F29
2102	C17	3115	D16	3540	M26	6506	I21
2103	C17	3121	B13	3541	N27	6515	A25
2104	C16	3122	B13	3542	M29	6516	B25
2105	C19	3140	A13	3543	N29	6517	C25
2106	C18	3141	A13	3544	M27	6519	G24
2108	D15	3142	B15	3545	N31	6520	F24
2110	D19	3143	C14	3546	N29	6526	I23
2111	D20	3144	D14	3547	K28	6527	I23
2112	C16	3145	C15	3548	K29	6529	E29
2113	C16	3146	C15	3549	K30	6530	D32
2120	B13	3147	C15	3550	I29	6534	H29
2140	B17	3148	B19	3551	I29	6536	I28
2141	B16	3301	C23	3552	H24	6542	K29
2145	A15	3302	D23	3553	H24	6546	K29
2401	G 7	3402	D 8	3555	I26	6547	K31
2402	D 7	3403	D 9	3556	I21	6551	J29
2403	D 9	3404	D 6	3557	E25	6570	M28
2404	D 7	3405	D10	3558	K28	6611	L15
2405	D 7	3406	D10	3560	H30	6633	N21
2406	D10	3407	F14	3561	I31	6650	G 4
2407	L 8	3408	D14	3562	J31	6651	G 3
2408	H20	3409	H 8	3563	J30	6801	L 6
2409	G12	3410	I 8	3564	I30	6802	N 5
2410	I 9	3411	H 9	3570	L28	6803	M 4
2411	H 9	3412	J 7	3573	H26	6804	N 6
2412	G20	3413	G10	3601	H10	7100	D17
2413	H19	3414	G 7	3602	N17	7140	A19
2415	H11	3415	F 6	3603	N18	7141	D15
2416	D11	3416	J 7	3604	K22	7142	C14
2417	D11	3417	C 5	3605	I11	7400	E 7
2418	E13	3418	B 4	3606	N22	7402	G18
2419	E13	3419	D14	3607	N22	7410	J 8
2450	M 8	3420	I 7	3608	M23	7417	B 4
2451	M 8	3421	D12	3609	K20	7443	D 5
2452	M11	3422	H 7	3610	K21	7444	D 6
2453	L12	3424	G 9	3611	M25	7450	L 9
2455	K10	3426	F 5	3612	L26	7451	L 8
2456	L14	3428	H20	3613	L16	7469	O13
2457	M13	3429	G18	3614	M25	7480	F30
2458	O11	3430	J 3	3615	K21	7481	F31
2459	M11	3438	J 4	3616	K22	7501	J18
2460	O12	3439	H 8	3617	L20	7506	H22
2461	M11	3440	F 5	3618	N20	7512	A24
2480	F31	3441	F 6	3619	M21	7513	B24
2501	J18	3442	F 6	3620	L22	7530	D29
2502	J17	3443	D 5	3621	M23	7540	M27
2503	I19	3444	D 5	3622	N26	7541	M28
2504	I22	3448	D 5	3623	N25	7542	M27
2507	I21	3450	K 8	3625	J 8	7543	K30
2509	J26	3451	K 9	3627	H 6	7550	I30
2510	J26	3452	L11	3628	H 5	7601	M20
2511	B26	3453	L12	3629	L17	7602	M21
2512	A25	3454	J17	3630	M20	7603	L21
2513	B25	3455	N13	3631	L17	7608	N24
2517	C25	3456	L13	3632	H10	7610	M25
2518	C25	3457	M13	3633	N20	7616	H 6
2519	G25	3458	M14	3634	H 5	7618	L16
2520	G25	3459	M14	3650	G 5	7650	G 4
2521	H25	3460	M11	3651	G 4	7651	G 3
2522	H25	3461	M13	3652	G 2	7652	G 3
2523	H24	3462	M14	3653	H 3	7800	J 4
2524	I24	3463	M14	3653	O17	7801	N 3
2525	H25	3464	N13	3654	G 4	7802	K 3
2526	F25	3465	N16	3655	G 3	9100	B12
2527	I25	3466	N16	3656	F 4	9101	A13
2529	C28	3467	O12	3800	M 7	9102	A14
2530	C29	3468	N13	3801	L 7	9103	B12
2531	D28	3469	O16	3802	M 3	9502	E25
2533	G30	3470	N14	3803	L 4	9503	D26
2534	G29	3471	N13	3804	K 4	9504	D25
2535	H30	3473	N11	3805	D 2	9507	H23
2536	I28	3479	F30	3806	M 3	9508	J19
2537	J28	3480	F32	3807	M 6	9537	A24
2540	D30	3481	F29	3809	M 4	9545	G26
2541	N26	3482	F30	3810	J 4	9625	I 7
2542	N28	3484	F 6	3811	M 6	9652	B 6
2543	M27	3485	F32	4400	K10		
2544	L30	3500	J17	4401	B 5		
2545	L29	3501	F18	4405	F 3		
2546	K29	3502	I19	4508	J19		
2547	K28	3503	J19	4530	I28		
2548	K30	3504	I24	4531	I28		
2551	J29	3505	L28	5110	C20		
2560	I30	3506	H21	5503	I20		
2600	M22	3507	I21	5505	I20		
2601	N18	3508	H17	5506	J20		
2603	I10	3509	F20	5507	I22		
2604	K22	3510	I26	5510	J26		
2605	L23	3511	F28	5511	A26		
2606	I11	3512	A23	5514	C24		
2607	H10	3513	B22	5520	E25		
2609	K20	3514	B24	5521	I26		
2610	L20	3515	A26	5524	I24		
2611	M26	3516	B26	5525	K28		
2612	M26	3517	C26	5526	L25		
2613	L20	3518	G25	5534	H29		
2614	M22	3519	G24	5543	H31		
2615	M25	3520	E24	5555	A27		
2633	N20	3521	E24	5860	D22		
2652	H 3	3523	H26	6100	C19		
2801	L 7	3524	I25	6101	D19		
2805	E 2	3525	H24	6103	D17		
2806	J 5	3526	I18	6104	D16		
2860	D23	3527	C30	6128	B14		
2861	D22	3528	C28	6280	E32		
3100	C15	3529	D28	6403	H19		
3101	D15	3530	C29	6404	G18		
3102	C15	3531	F17	6417	B 5		
3104	D15	3532	E28	6422	H 7		
3105	D19	3533	E28	6440	E 5		
3106	D18	3534	G28	6441	E 5		
3107	C19	3535	H28	6451	N11		

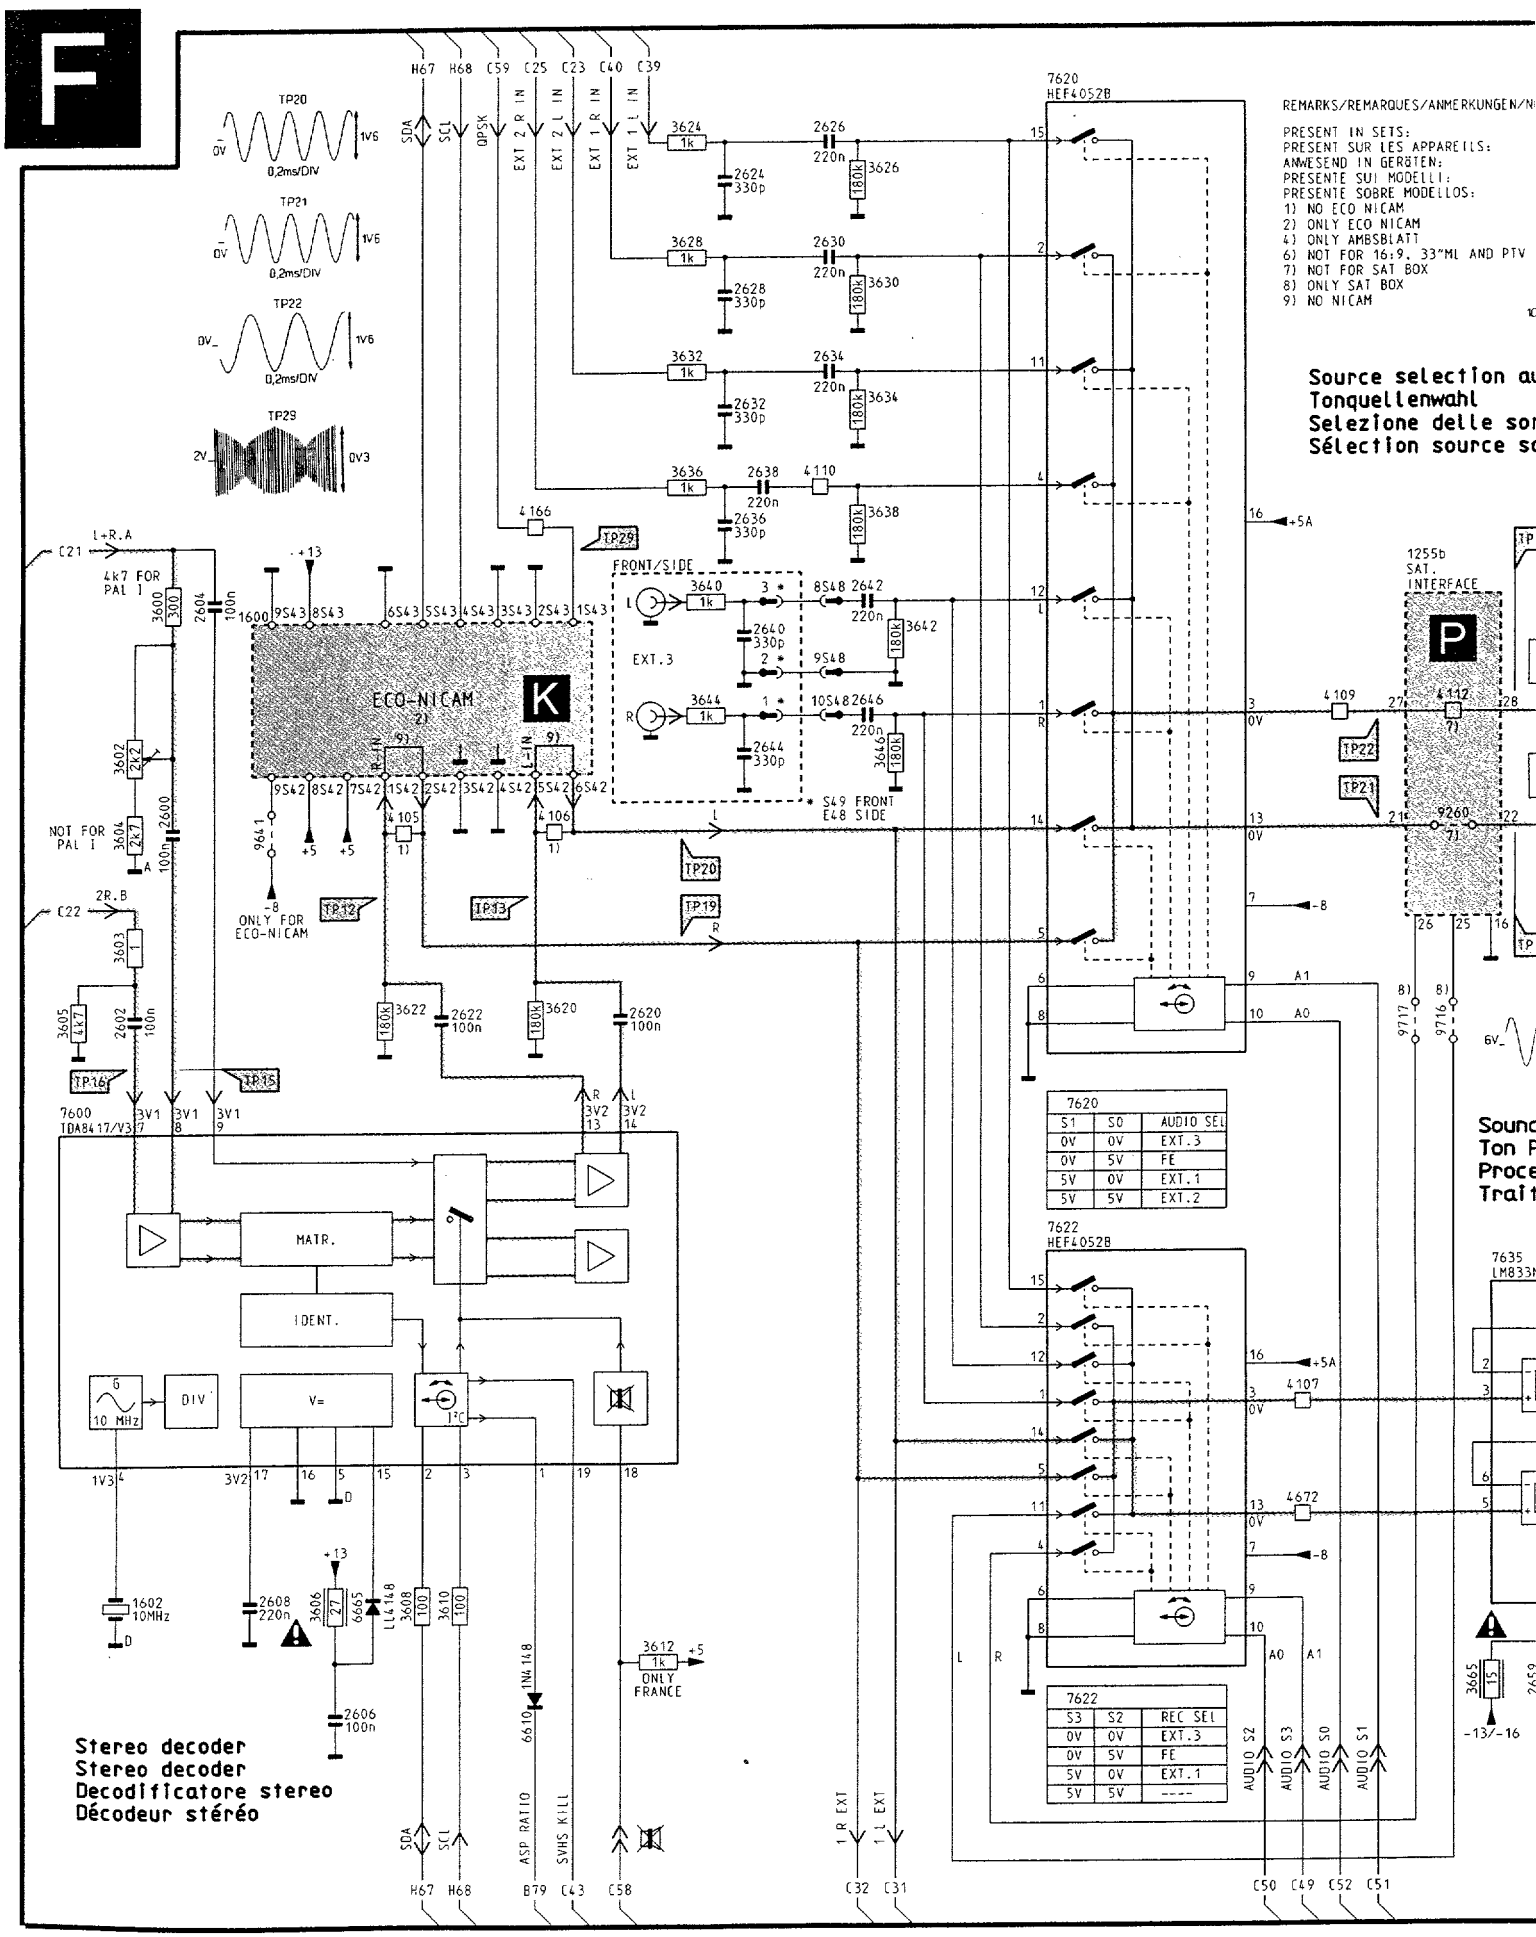

7620		
S1	S0	AUDIO SEL
0V	0V	EXT.3
0V	5V	FE
5V	0V	EXT.1
5V	5V	EXT.2

7622		
S3	S2	REC SEL
0V	0V	EXT.3
0V	5V	FE
5V	0V	EXT.1
5V	5V	----

Traitement audio

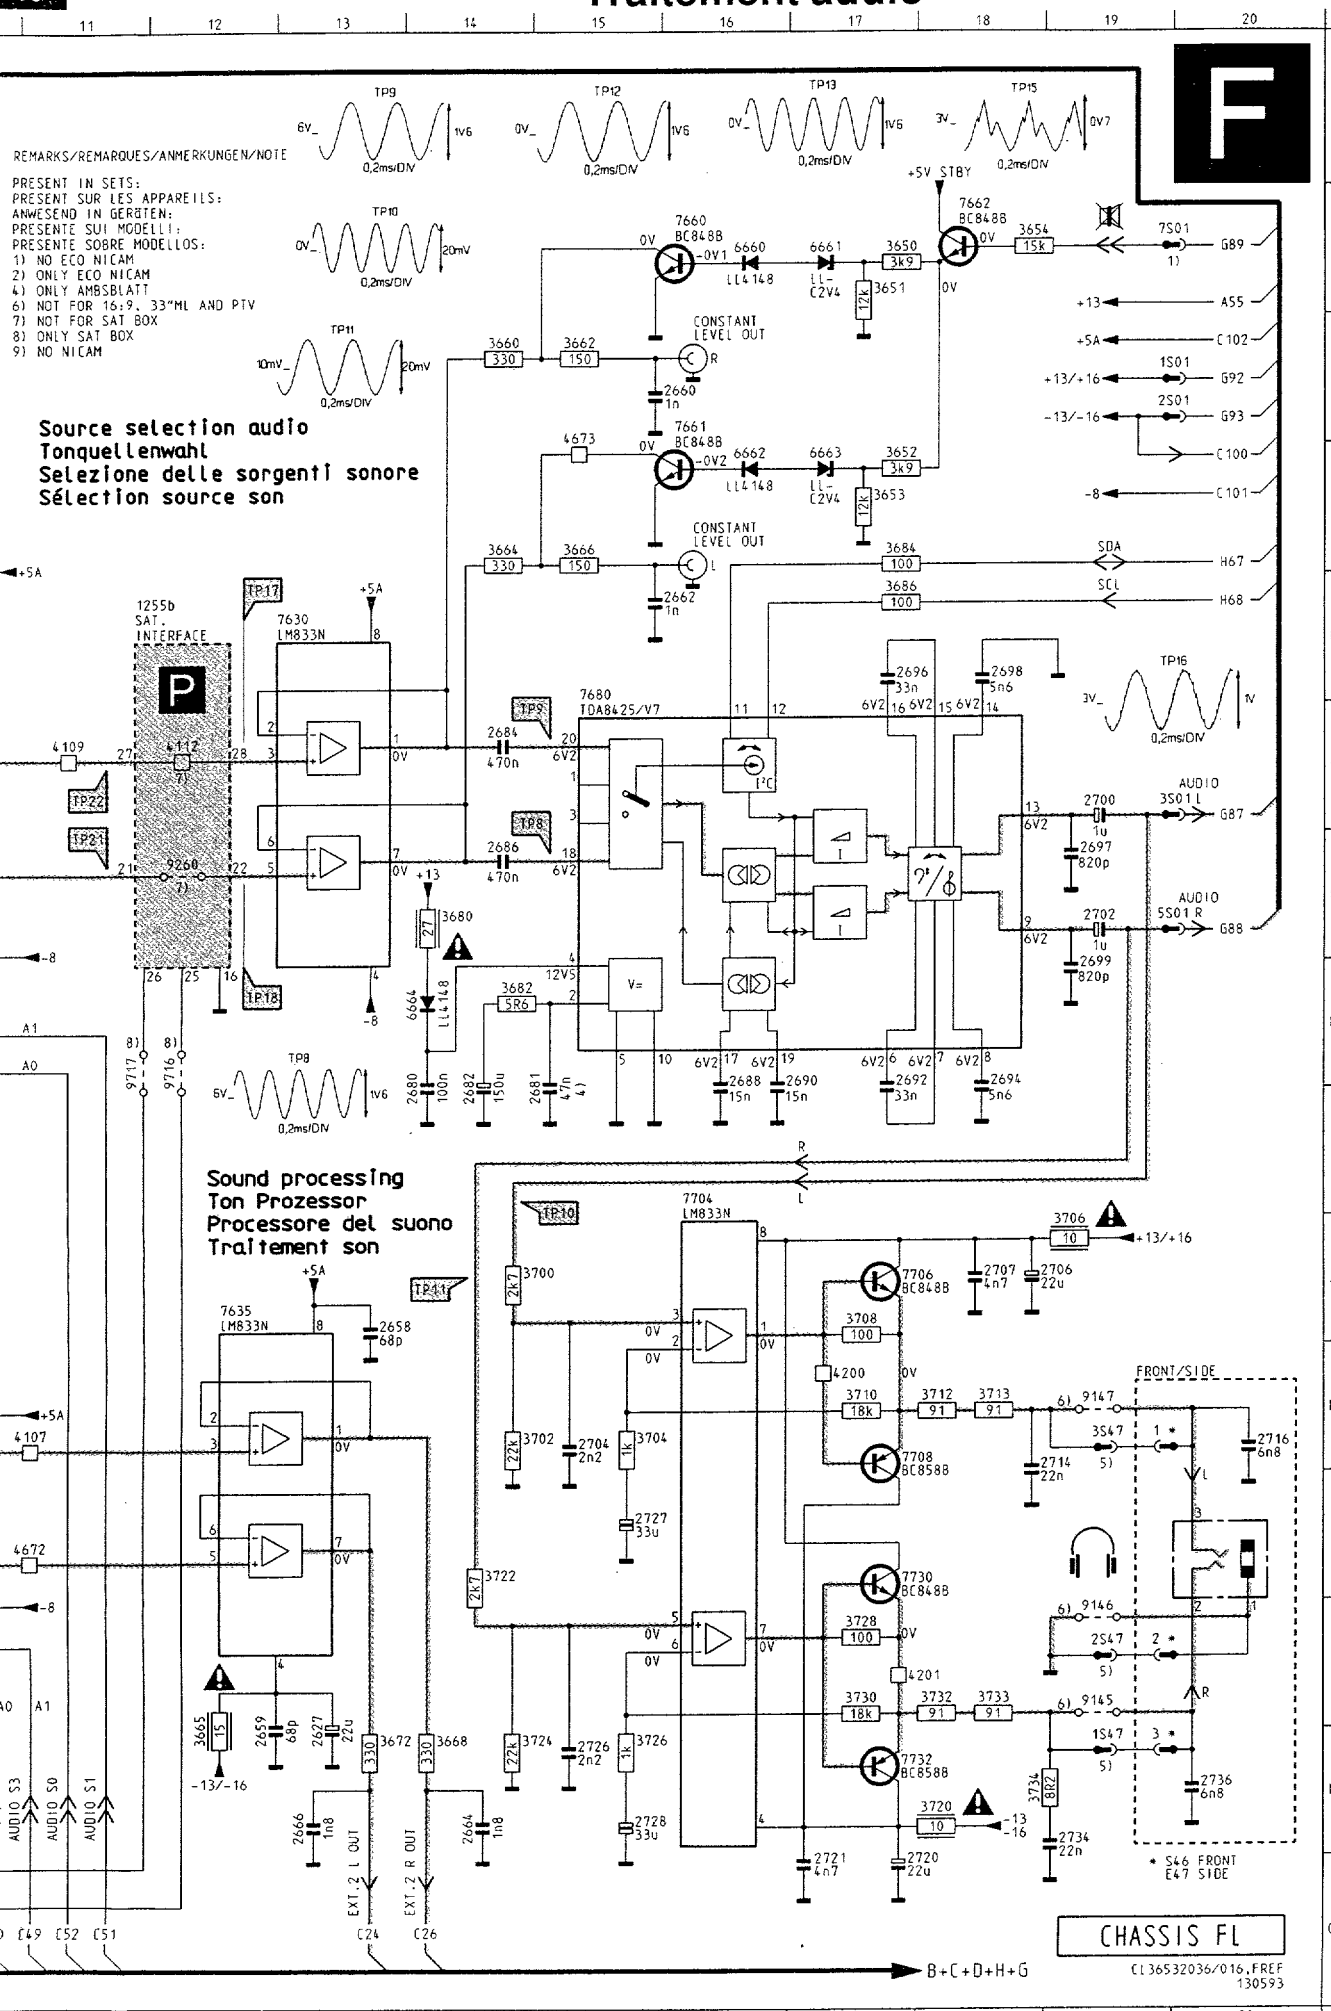

	1255	E11	4110	D 7
	1600	E 2	4112	F12
	1602	M 1	4166	D 5
	2600	G 2	4200	K17
A	2602	H 1	4201	M17
	2604	E 2	4672	L11
	2606	N 3	4673	C15
	2608	M 2	6610	N 5
	2620	H 5	6660	B16
	2622	H 4	6661	B17
	2624	B 6	6662	D16
	2626	A 7	6663	D17
	2627	M13	6664	H14
B	2628	C 6	6665	M 3
	2630	B 7	7600	I 1
	2632	D 6	7620	A 9
	2634	C 7	7622	J 9
	2636	D 6	7630	E12
	2638	D 6	7635	J12
	2640	E 6	7660	B16
C	2642	E 7	7661	C16
	2644	F 6	7662	B18
	2646	F 7	7680	E15
	2658	J13	7704	I16
	2659	M12	7706	J17
	2660	C16	7708	K17
	2662	E16	7730	L17
D	2664	N14	7732	N17
	2666	N13	9145	M19
	2680	H14	9146	M19
	2681	H15	9147	K19
	2682	H14	9260	G12
	2684	F14	9641	G 2
	2686	G14	9716	H12
	2688	H16	9717	H11
E	2690	H16		
	2692	H17		
	2694	H18		
	2696	E17		
	2697	G19		
	2698	E18		
	2699	H19		
F	2700	F19		
	2702	G19		
	2704	K15		
	2706	J18		
	2707	J18		
	2714	K18		
	2716	K20		
	2720	O17		
G	2721	O17		
	2726	N15		
	2727	L15		
	2728	N15		
	2734	N19		
	2736	N20		
	3600	E 2		
	3602	F 1		
H	3603	H 1		
	3604	G 1		
	3605	H 1		
	3606	M 3		
	3608	M 4		
	3610	M 4		
	3612	M 6		
I	3620	H 5		
	3622	H 3		
	3624	A 6		
	3626	B 7		
	3628	B 6		
	3630	C 7		
	3632	C 6		
	3634	C 7		
J	3636	D 6		
	3638	D 7		
	3640	E 6		
	3642	E 7		
	3644	F 6		
	3646	F 7		
	3650	B17		
K	3651	B17		
	3652	D17		
	3653	D17		
	3654	B18		
	3660	C14		
	3662	C15		
	3664	D14		
L	3665	M12		
	3666	O15		
	3668	N14		
	3672	N13		
	3680	G14		
	3682	H14		
	3684	D17		
	3686	E17		
M	3700	J14		
	3702	K14		
	3704	K15		
	3706	J19		
	3708	J17		
	3710	K17		
	3712	K18		
	3713	K18		
N	3720	N18		
	3722	L14		
	3724	N14		
	3726	N15		
	3728	M17		
	3730	M17		
	3732	M18		
	3733	M18		
O	3734	N18		
	4105	G 4		
	4106	G 5		
	4107	K11		
	4109	F11		

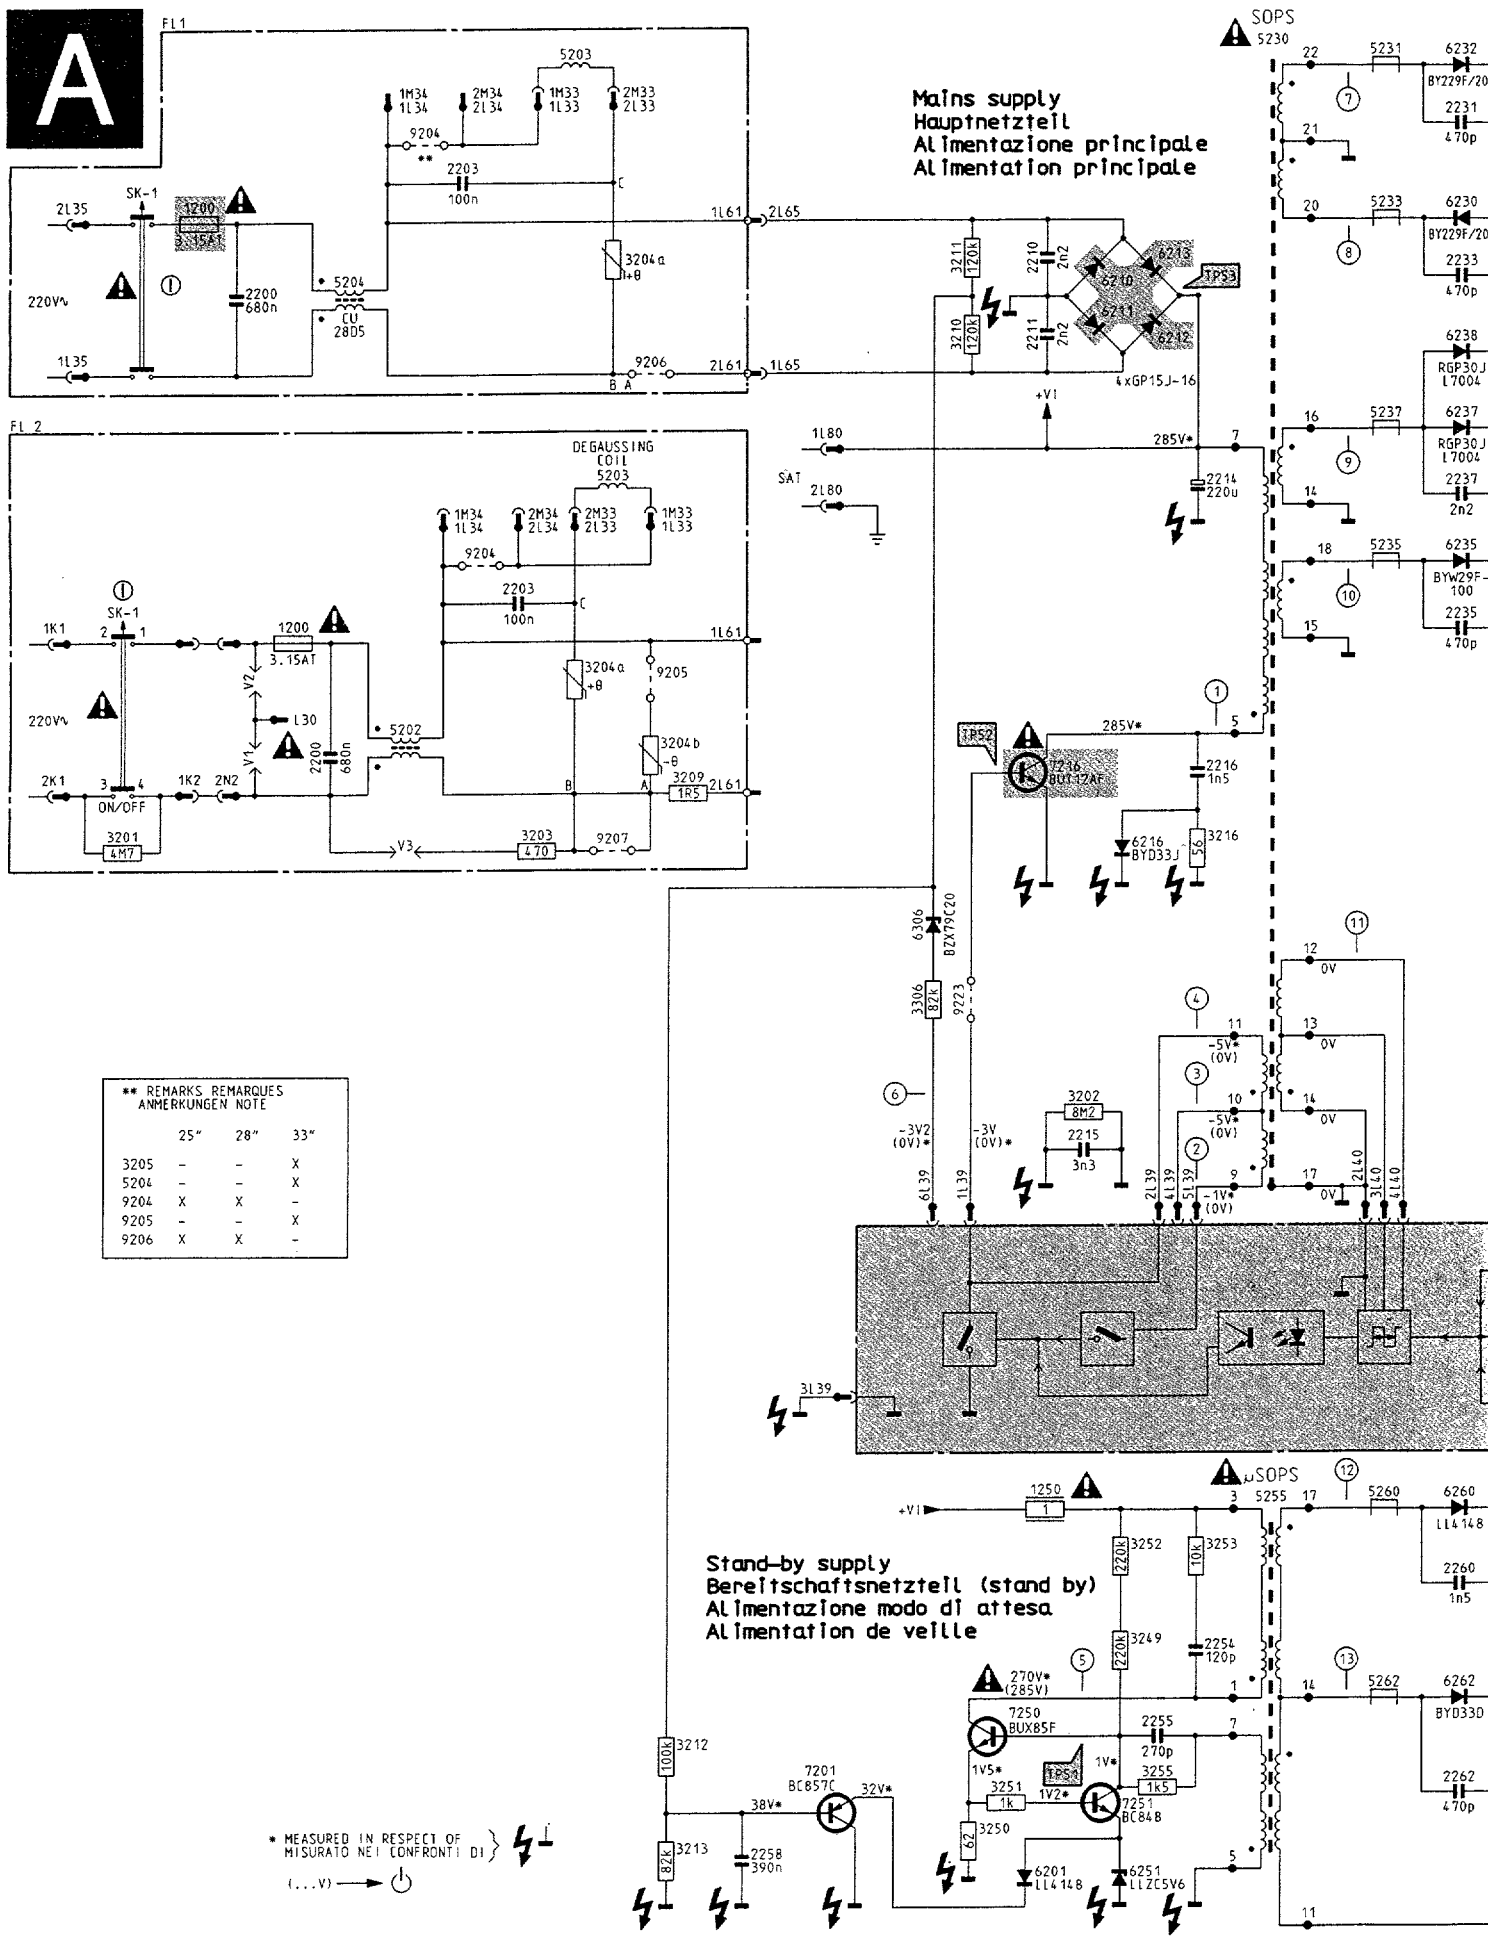
A
FL1
FL 2
Mains supply
Hauptnetzteil
Alimentazione principale
Alimentation principale
SOPS
5230
DEGAUSSING COIL
5203
SK-1
1200
3.15AT
220V~
2200 680n
5204
CU 28D5
2203 100n
3204a
9204
9205
9206
9207
2L35
1L35
1L61
2L65
2L61
1L65
3211 120k
3210 120k
2210 2n2
2211 2n2
6210
6211
6212
6213
TPS3
4xGP15J-16
+V1
1L80
285V*
SAT
2L80
2214 220u
6232 BY229F/20
2231 470p
6233 BY229F/20
2233 470p
6238 RGP30J L7004
6237 RGP30J L7004
2237 2n2
6235 BYW29F-100
2235 470p
5231
5233
5237
5235
TPS2
7236 BUT12AF
2216 1n5
6216 BYD33J
3216 5k6
6306 BZX79C20
3306 82k
9223
3202 8M2
2215 3n3
-5V* (0V)
-3V (0V)*
-3V2 (0V)*
-1V* (0V)
0V
3L39
µSOPS
5255
5260
6260 LL4148
2260 1n5
1250
3252 220k
3253 10k
3249 220k
2254 120p
270V* (285V)
7250 BUX85F
2255 270p
3255 1k5
TPS4
1V5*
1V*
1V2*
3251 1k
7251 BC848
3250 62
6201 LL4148
6251 LLZC5V6
5262
6262 BYD33D
2262 470p
Stand-by supply
Bereitschaftsnetzteil (stand by)
Alimentazione modo di attesa
Alimentation de veille
3212 100k
7201 BC857C
32V*
38V*
3213 82k
2258 390n
** REMARKS REMARQUES ANMERKUNGEN NOTE
25" 28" 33"
3205 - - X
5204 - - X
9204 X X -
9205 - - X
9206 X X -
* MEASURED IN RESPECT OF MISURATO NEI CONFRONTI DI
(...V)

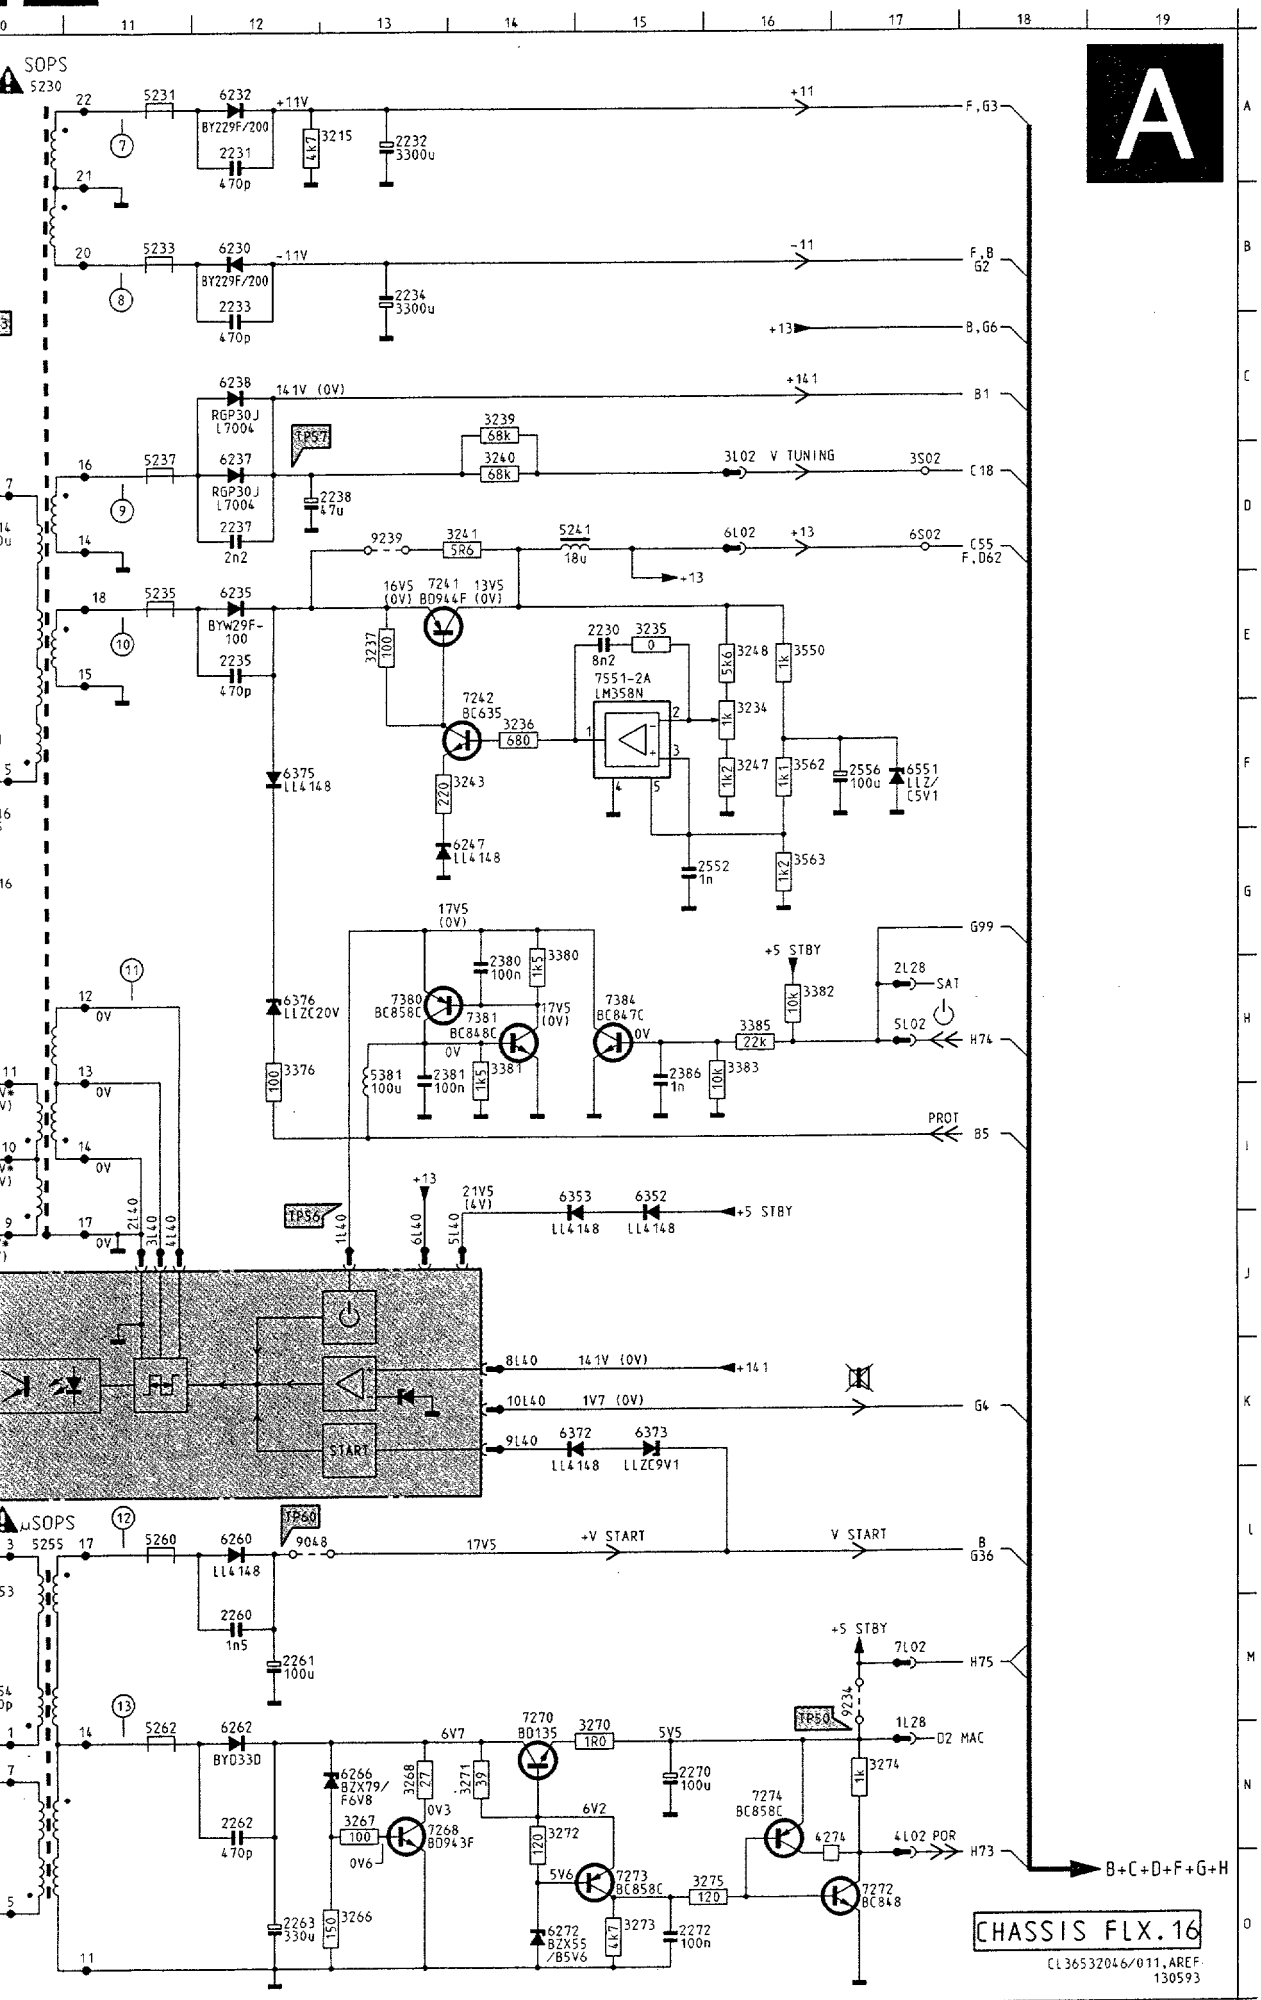

	1200	B 2	6352	I 15
	1200	E 3	6353	I 14
	1250	L 9	6372	K 14
	2200	F 3	6373	K 15
A	2200	C 2	6375	F 12
	2203	E 4	6376	H 12
	2203	B 4	6551	F 17
	2210	B 9	7201	N 7
	2211	C 9	7216	F 9
	2214	D10	7241	E 13
	2215	I 9	7242	F 14
	2216	F10	7250	N 8
B	2230	E15	7251	N 9
	2231	A12	7268	N13
	2232	A13	7270	M14
	2233	B12	7272	O17
	2234	B13	7273	O15
	2235	E12	7274	N16
	2237	D12	7380	H13
	2238	D12	7381	H14
C	2254	M10	7384	H15
	2255	N 9	7551	E15
	2258	O 6	9048	L12
	2260	M12	9204	A 4
	2261	M12	9204	E 4
	2262	N12	9205	F 6
	2263	O12	9206	C 5
D	2270	N15	9207	G 5
	2272	O15	9223	H 8
	2380	H14	9234	M17
	2381	H13	9239	O13
	2386	H15		
	2552	G15		
	2556	F17		
	3201	G 1		
E	3202	I 9		
	3203	G 5		
	3204	B 5		
	3204	E 5		
	3204	F 6		
	3209	F 6		
	3210	C 8		
F	3211	B 8		
	3212	N 6		
	3213	O 6		
	3215	A13		
	3216	G10		
	3234	E16		
	3235	E15		
	3236	F14		
G	3237	E13		
	3239	C14		
	3240	D14		
	3241	D14		
	3243	F14		
	3247	F16		
	3248	E16		
H	3249	M 9		
	3250	O 8		
	3251	N 8		
	3252	L 9		
	3253	L10		
	3255	N 9		
	3266	O13		
	3267	N13		
I	3268	N13		
	3270	N15		
	3271	N14		
	3272	N14		
	3273	O15		
	3274	N17		
	3275	O16		
	3306	H 8		
J	3376	H12		
	3380	G14		
	3381	H14		
	3382	H16		
	3383	H16		
	3385	H16		
	3550	E16		
K	3562	F16		
	3563	G16		
	4L02	N17		
	4274	N16		
	5202	F 4		
	5203	A 5		
	5203	D 5		
	5204	C 3		
L	5230	A10		
	5231	A11		
	5233	B11		
	5235	E11		
	5237	D11		
	5241	D14		
	5255	L10		
M	5260	L11		
	5262	N11		
	5381	H13		
	6201	O 9		
	6210	C 9		
	6211	C 9		
	6212	C 9		
N	6213	B 9		
	6216	G 9		
	6230	B12		
	6232	A12		
	6235	E12		
	6237	D12		
	6238	C12		
	6247	G14		
	6251	O 9		
O	6260	L12		
	6262	N12		
	6266	N13		
	6272	O14		
	6306	H 8		

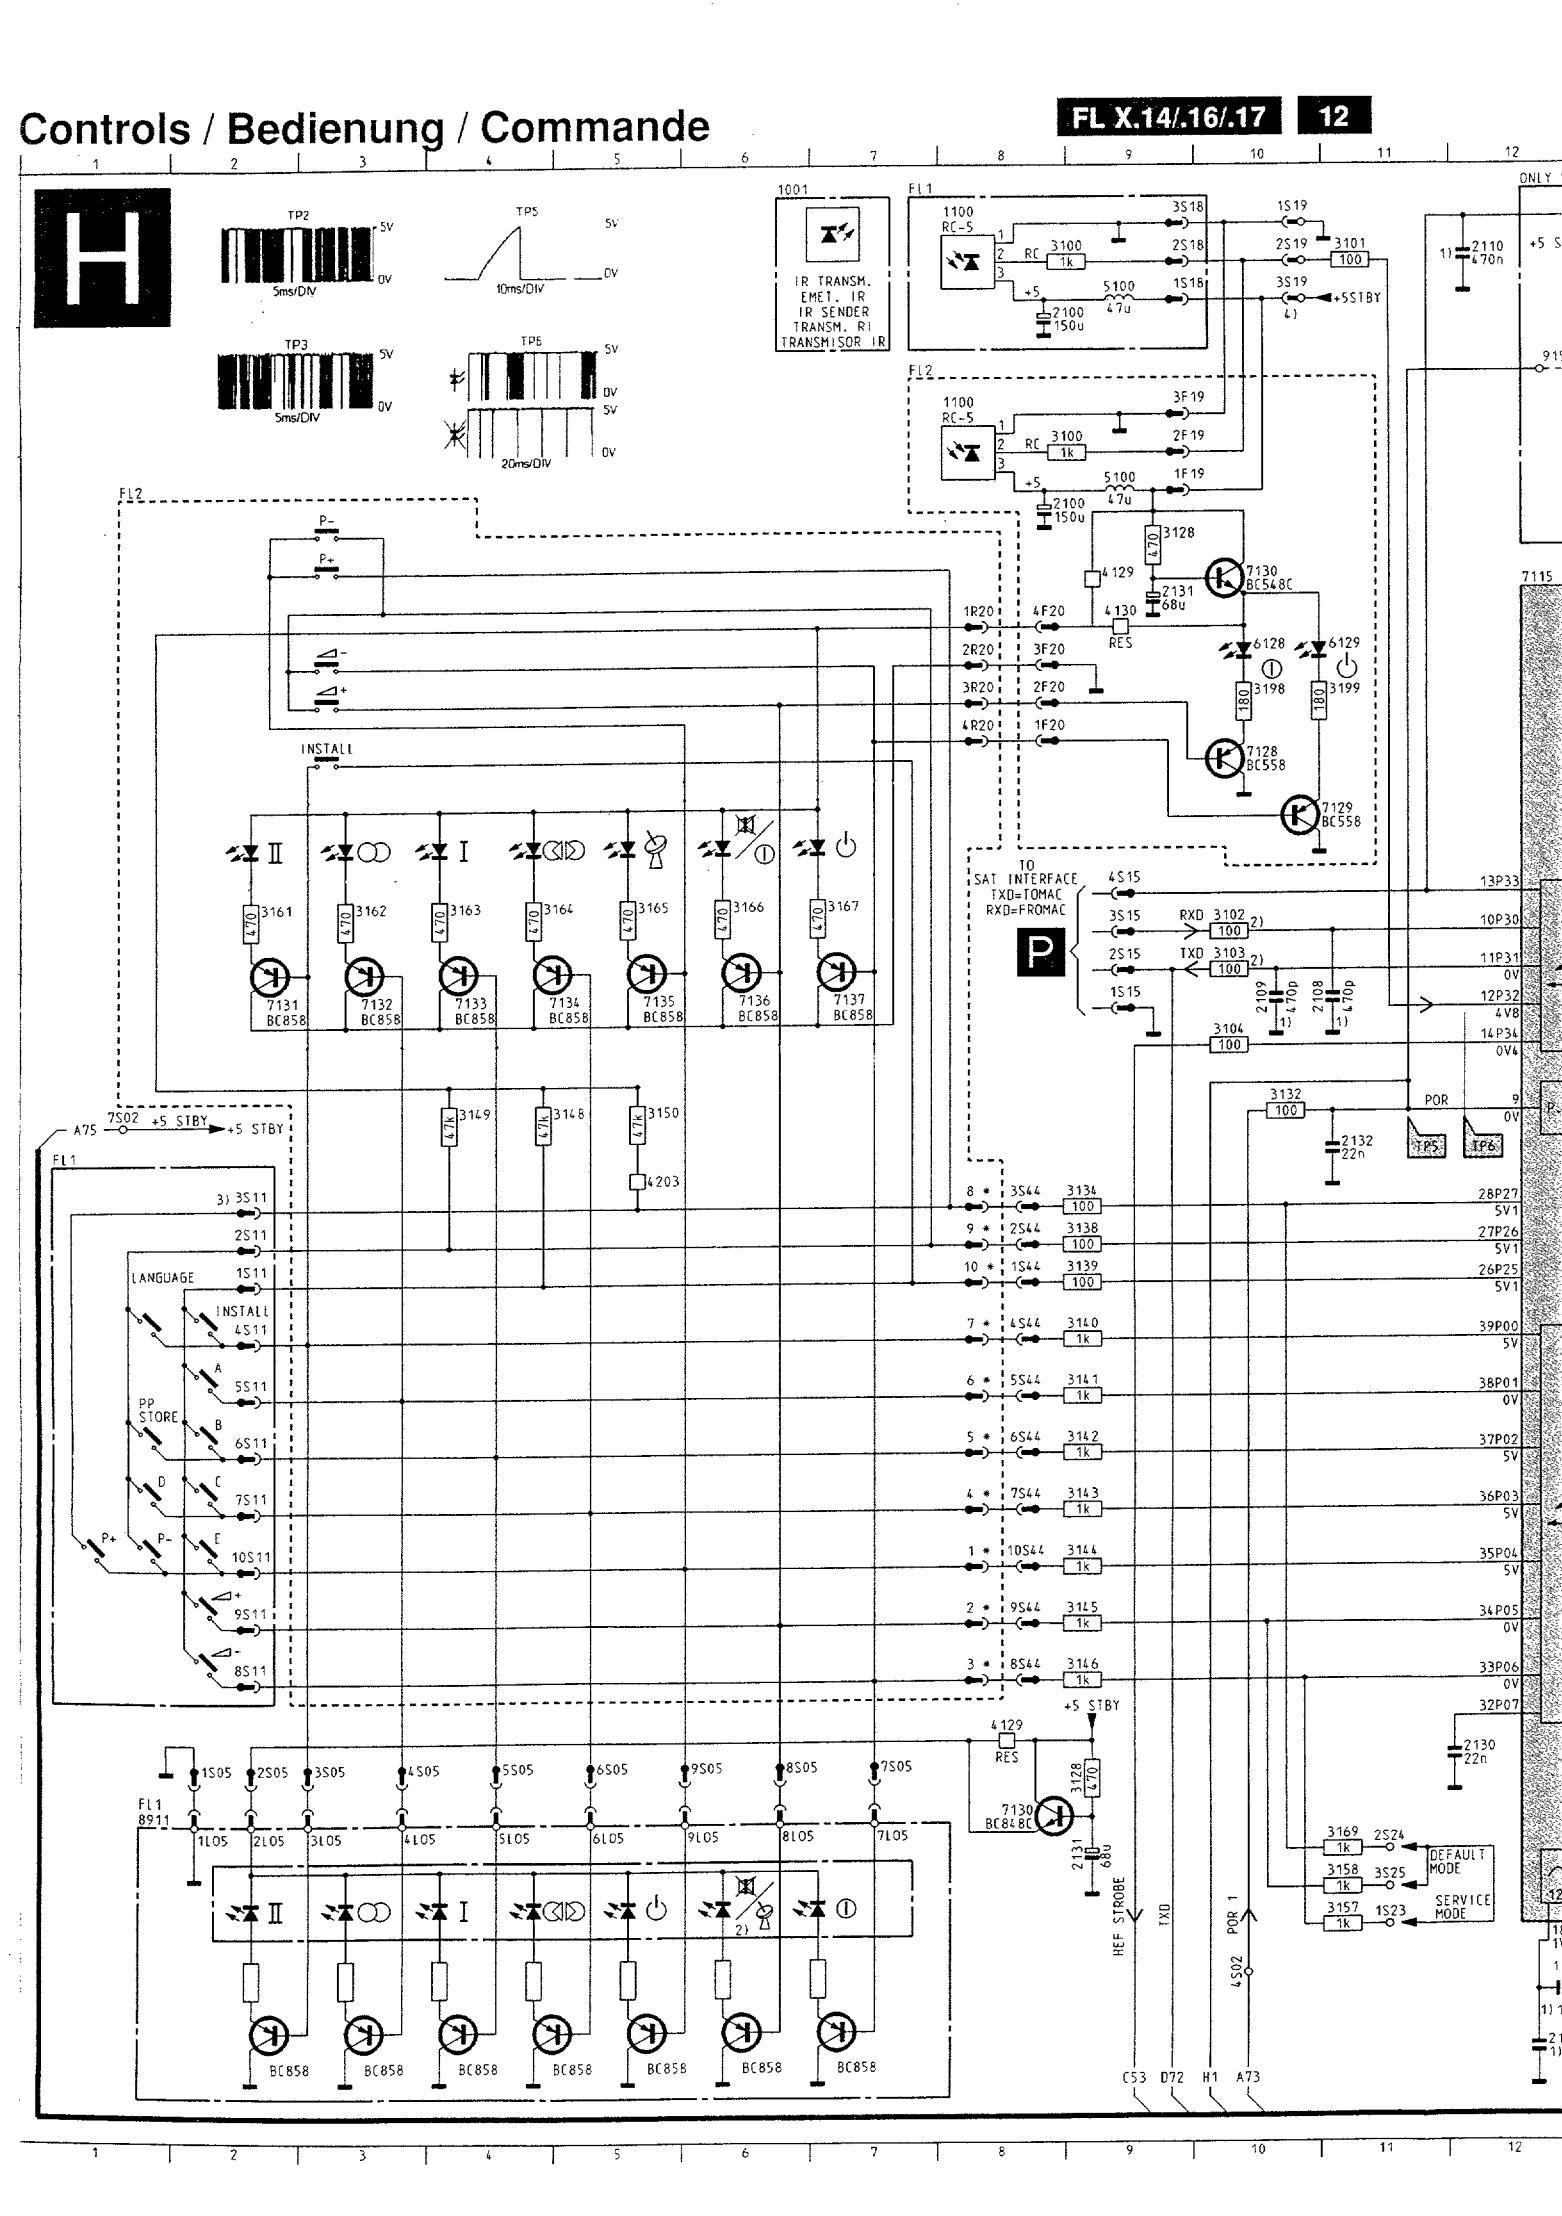
H
TP2
5V
0V
5ms/DIV
TP5
10ms/DIV
TP3
TP6
20ms/DIV
1001
IR TRANSM.
EMET. IR
IR SENDER
TRANSM. RI
TRANSMISOR IR
FL1
FL2
1100
RC-5
3100
1k
5100
47u
2100
150u
3S18
2S18
1S18
1S19
2S19
3101
100
3S19
+5STBY
3F19
2F19
1F19
3128
470
4129
2131
68u
7130
BC548C
4130
RES
1R20
2R20
3R20
4R20
4F20
3F20
2F20
1F20
6128
6129
3198
3199
180
7128
BC558
7129
BC558
P-
P+
INSTALL
II
I
3161
3162
3163
3164
3165
3166
3167
7131
7132
7133
7134
7135
7136
7137
BC858
TO
SAT INTERFACE
TXD=TOMAC
RXD=FROMAC
4S15
3S15
2S15
1S15
RXD 3102
TXD 3103
100
2109
2108
470p
3104
3132
2132
22n
POR
TP5
TP6
13P33
10P30
11P31
0V
12P32
4V8
14P34
0V4
9
0V
3149
3148
3150
4203
47k
A75
7S02
+5 STBY
3) 3S11
2S11
1S11
4S11
5S11
6S11
7S11
10S11
9S11
8S11
LANGUAGE
INSTALL
PP
STORE
A
B
C
D
E
8 * 3S44
9 * 2S44
10 * 1S44
7 * 4S44
6 * 5S44
5 * 6S44
4 * 7S44
1 * 10S44
2 * 9S44
3 * 8S44
3134
3138
3139
3140
3141
3142
3143
3144
3145
3146
28P27
27P26
26P25
39P00
38P01
37P02
36P03
35P04
34P05
33P06
32P07
5V1
5V
0V
1S05
2S05
3S05
4S05
5S05
6S05
9S05
8S05
7S05
1L05
2L05
3L05
4L05
5L05
6L05
9L05
8L05
7L05
8911
2)
3169
3158
3157
2S24
3S25
1S23
DEFAULT
MODE
SERVICE
MODE
HEF STROBE
TXD
POR 1
4S02
C53
D72
H1
A73

Controls / Bedienung / Commande

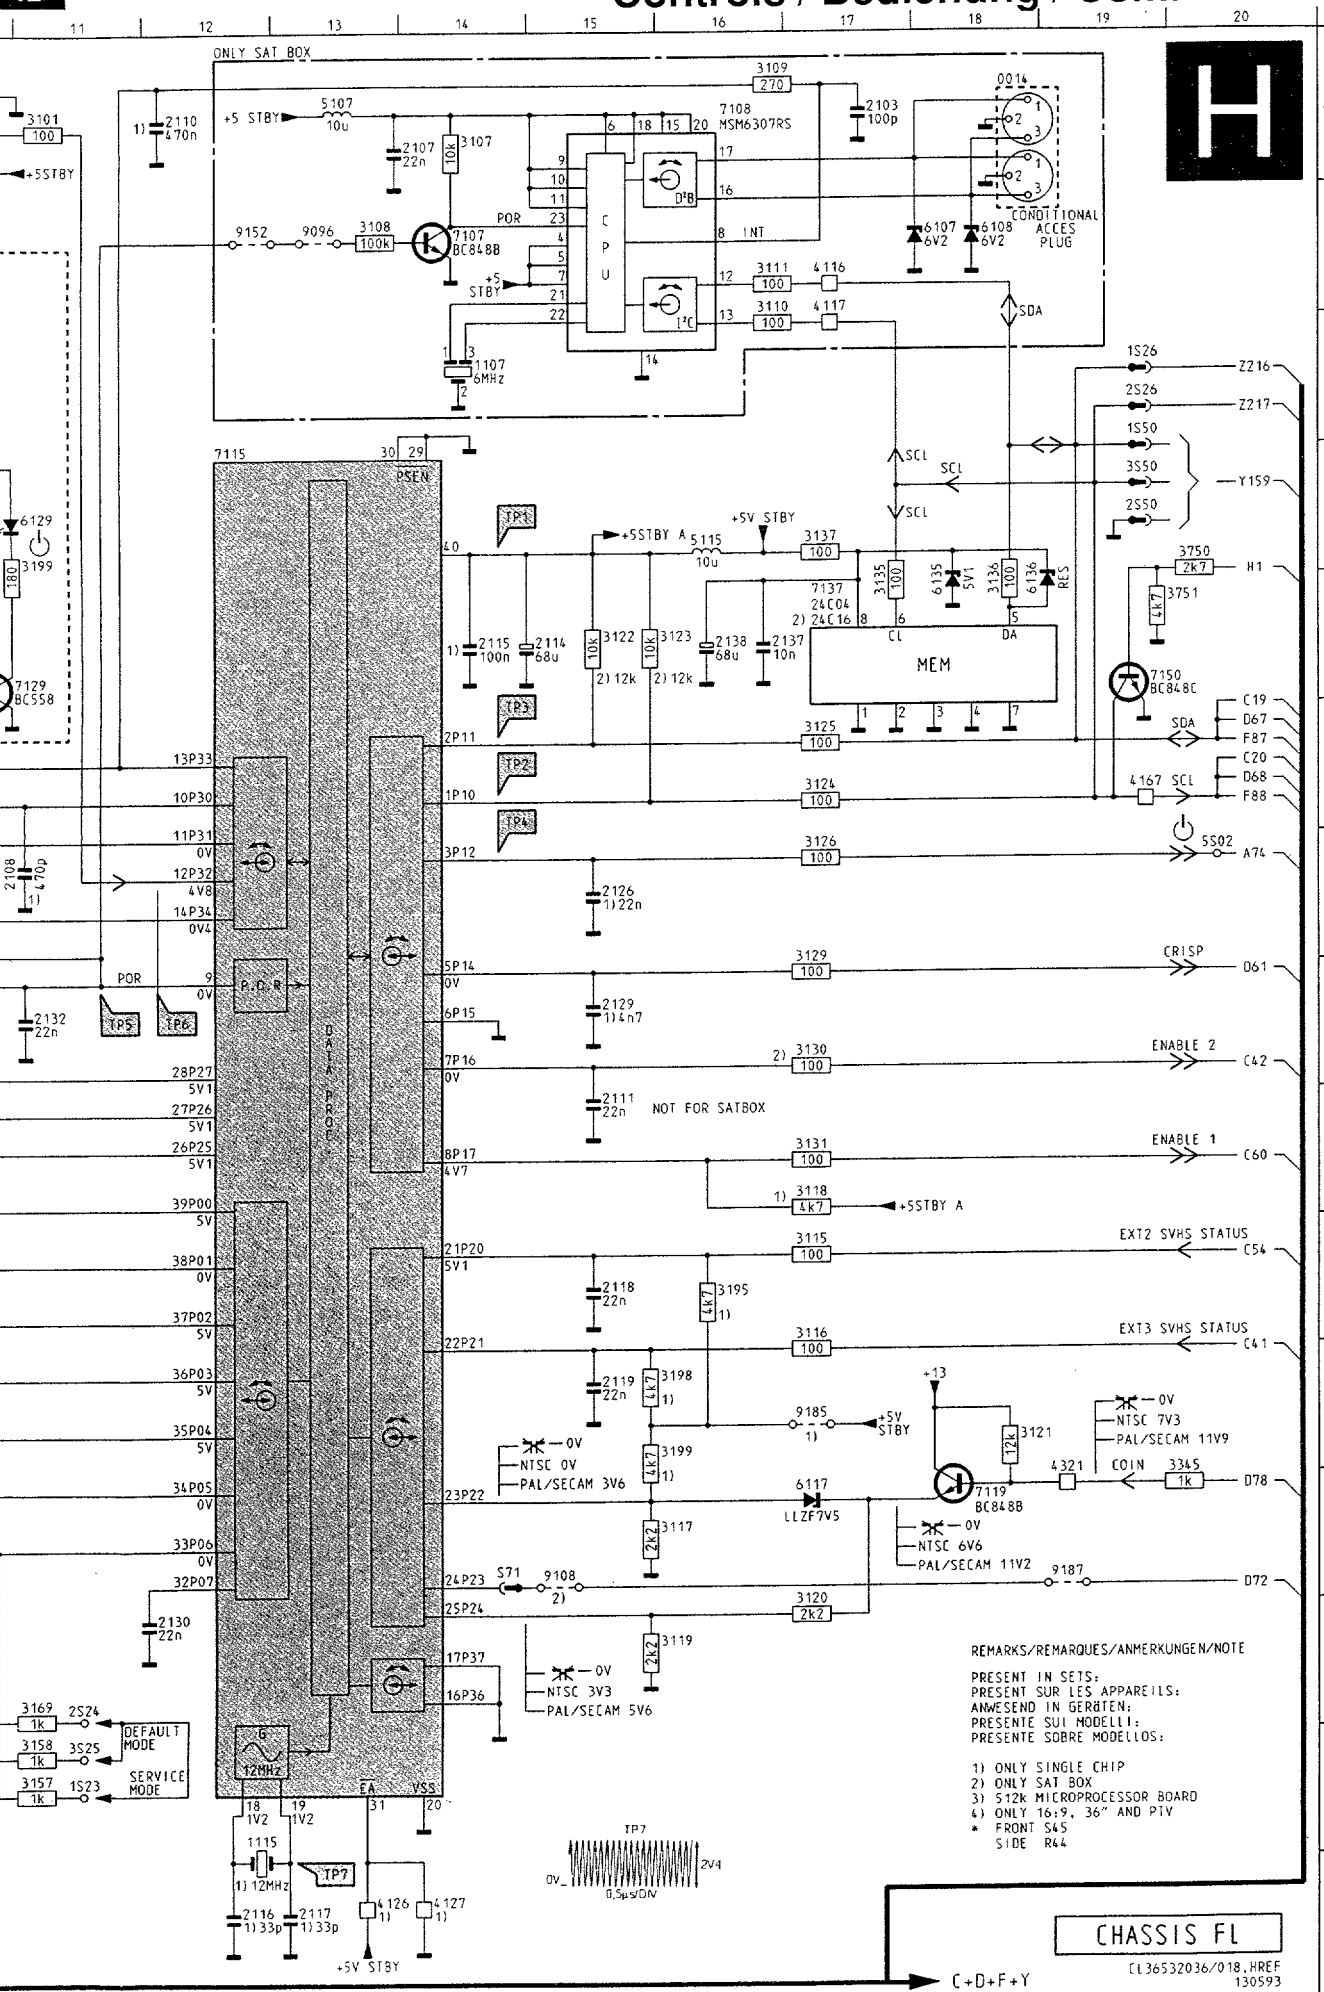

0014	A18	7128	E10
1001	A 6	7129	E10
1100	A 8	7130	M 8
1100	B 8	7130	D10
1107	C14	7131	G 2
1115	N12	7132	G 3
2100	B 8	7133	G 4
2100	C 8	7134	G 4
2103	A17	7135	G 5
2107	A14	7136	G 6
2108	G11	7137	G 7
2109	G10	7137	E17
2110	A12	7150	E19
2111	I15	8911	M 1
2114	E15	9096	B13
2115	E14	9108	L15
2116	O12	9152	B12
2117	O13	9185	K17
2118	J15	9187	L19
2119	K15		
2126	G15		
2129	H15		
2130	M12		
2131	M 9		
2131	D 9		
2132	H11		
2137	E16		
2138	E16		
3100	A 9		
3100	B 9		
3101	A11		
3102	F10		
3103	F10		
3104	G10		
3107	A14		
3108	B13		
3109	A16		
3110	B16		
3111	B16		
3115	J17		
3116	J17		
3117	L16		
3118	I17		
3119	M16		
3120	M17		
3121	K18		
3122	E15		
3123	E16		
3124	F17		
3125	F17		
3126	G17		
3128	M 9		
3128	C 9		
3129	H17		
3130	H17		
3131	I17		
3132	H10		
3134	H 9		
3135	E17		
3136	E18		
3137	D17		
3138	I 9		
3139	I 9		
3140	I 9		
3141	J 9		
3142	J 9		
3143	K 9		
3144	K 9		
3145	L 9		
3146	L 9		
3148	H 4		
3149	H 4		
3150	H 5		
3157	N11		
3158	N11		
3161	F 2		
3162	F 3		
3163	F 4		
3164	F 4		
3165	F 5		
3166	F 6		
3167	F 7		
3169	M11		
3195	J16		
3198	D10		
3198	K16		
3199	D11		
3199	K16		
3345	L20		
3750	D20		
3751	E19		
4116	B17		
4117	B17		
4126	O13		
4127	O14		
4129	L 8		
4129	D 9		
4130	D 9		
4167	F19		
4203	H 5		
4321	L19		
5100	A 9		
5100	C 9		
5107	A13		
5115	D16		
6107	B18		
6108	B18		
6117	L17		
6128	D10		
6129	D11		
6135	E18		
6136	E18		
7107	B14		
7108	A16		
7115	D12		
7119	L18		

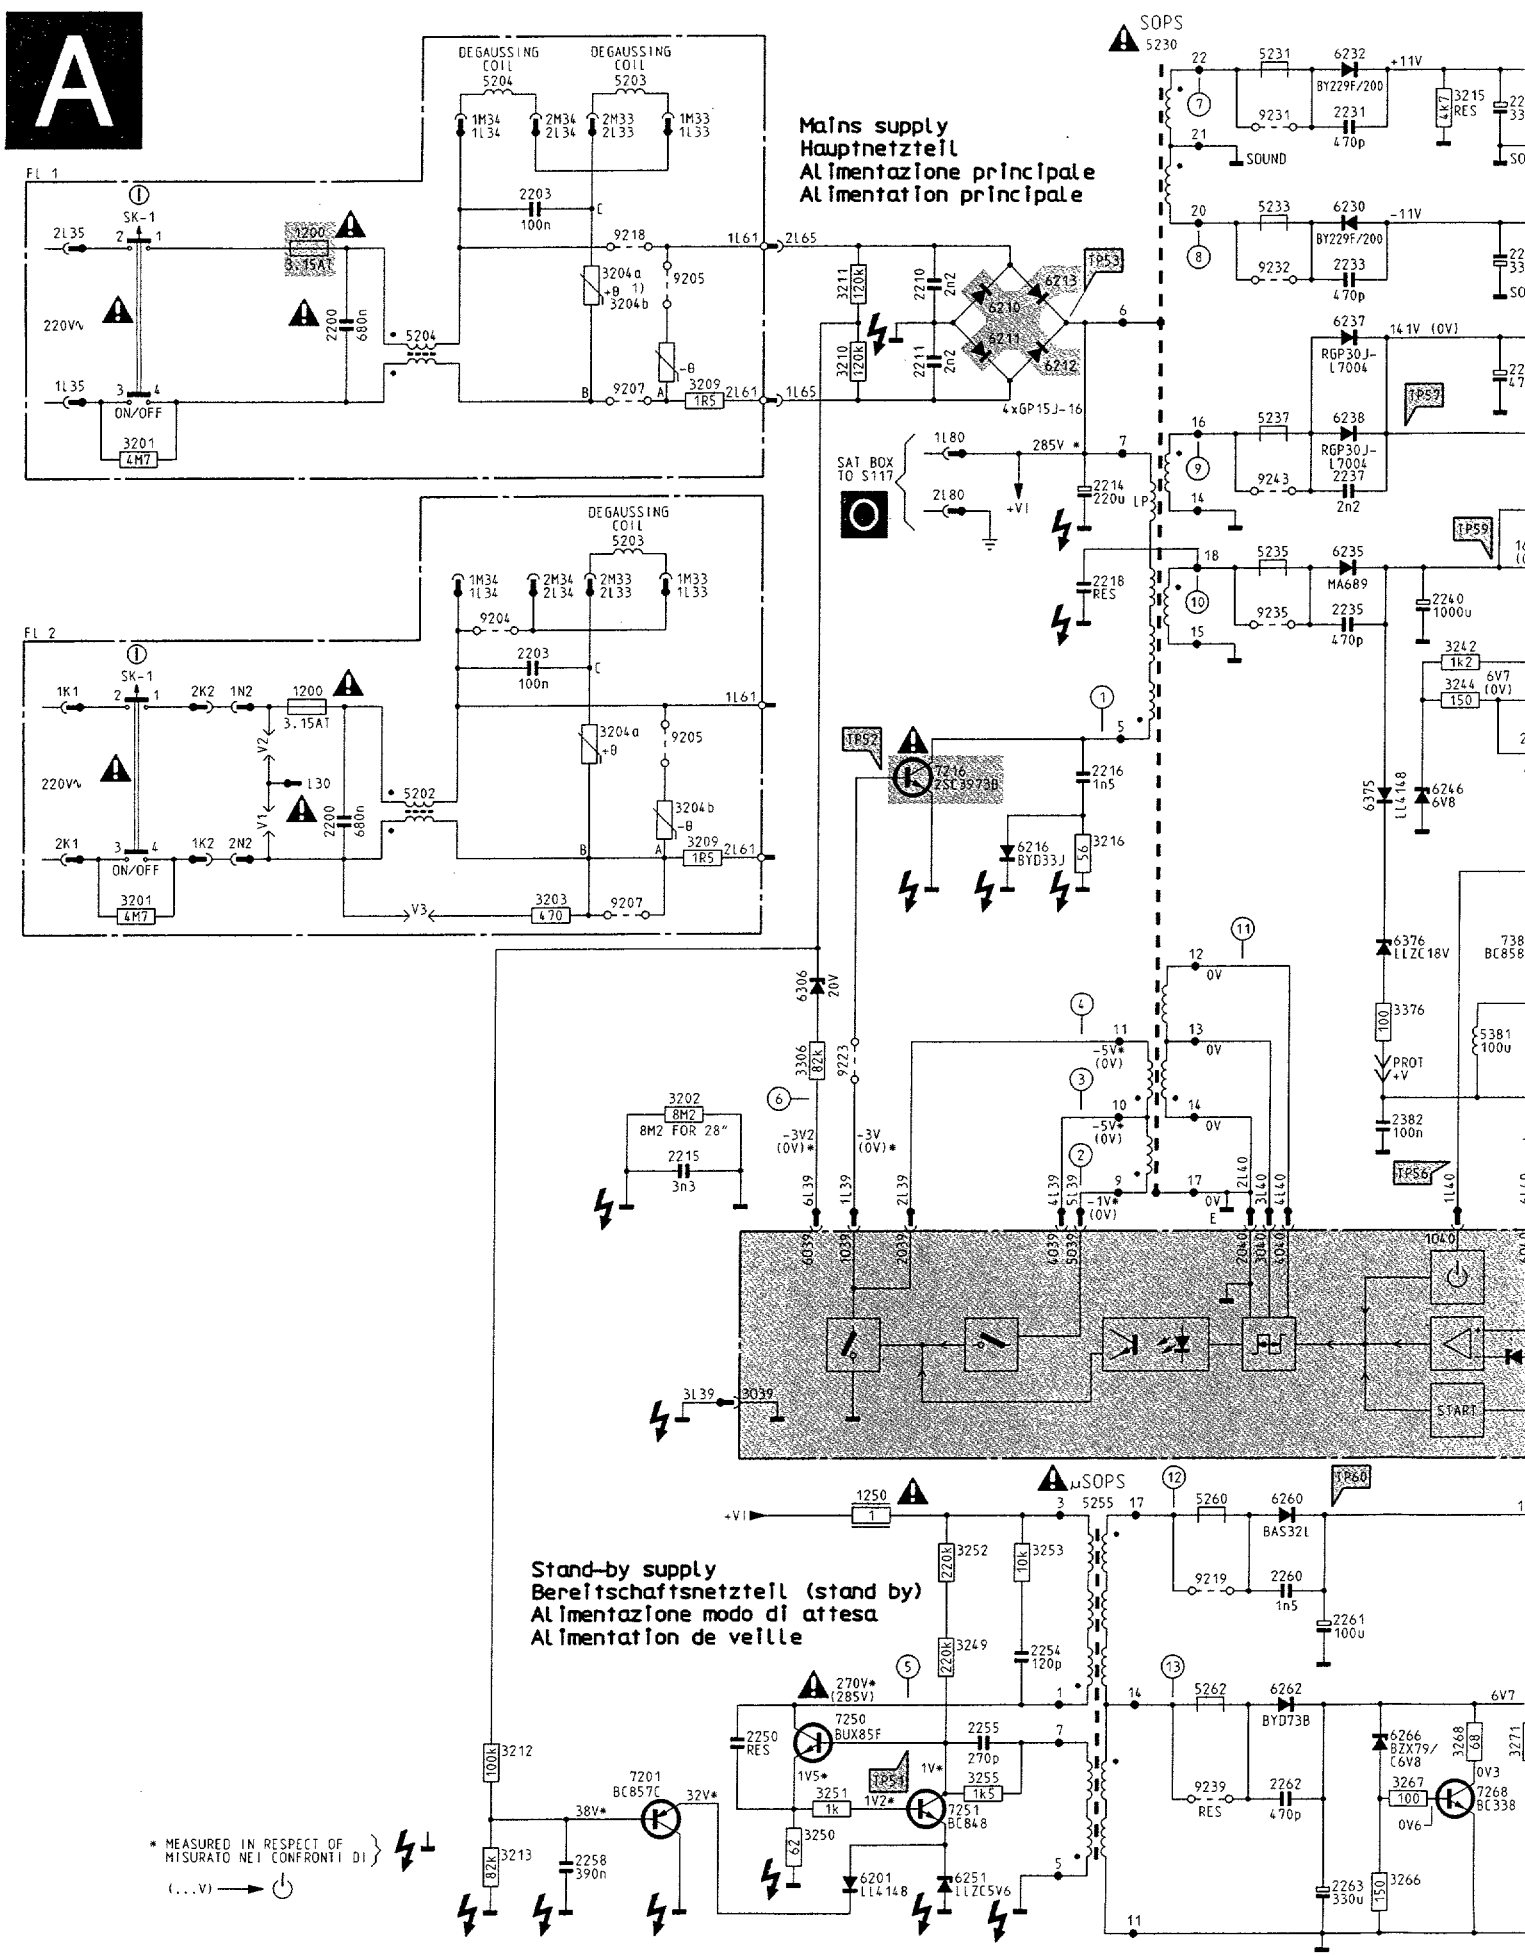
A
Mains supply
Hauptnetzteil
Alimentazione principale
Alimentation principale
Stand-by supply
Bereitschaftsnetzteil (stand by)
Alimentazione modo di attesa
Alimentation de veille
SOPS
µSOPS
DEGAUSSING COIL 5204
DEGAUSSING COIL 5203
FL 1
FL 2
SK-1
ON/OFF
SAT BOX TO S117
4xGP15J-16
8M2 FOR 28"
SOUND
START
PROT +V
* MEASURED IN RESPECT OF MISURATO NEI CONFRONTI DI
(...V) → ⏻

A

1)

	28" 32"	36"	2 TUNER PIP	NON PIP	PIP
3238	----	----	100k	300k	300k
3239	----	----	100k	300k	300k
3240	----	----	100k	300k	300k
3241	----	----	2R2	4R7	2R7

TP 50 5V3

TP 51 11V -5V

TP 52 14V -15V

TP 53 285V

TP 56 23V 0V

TP 57 141V

TP 59 16V5

TP 60 17V5

B+C+D+F+G+H

CHASSIS FLX.14

CL36532036/011.AREF
130593

1200	B 2	6237	C11
1200	F 2	6238	D11
2200	C 2	6246	G12
2200	G 2	6251	O 8
2202	B 3	6260	L11
2203	B 4	6262	N11
2203	E 4	6266	N11
2210	C 8	6272	O13
2211	C 8	6280	D14
2214	D 9	6306	H 7
2215	I 6	6352	I14
2216	F 9	6353	I14
2218	E 9	6372	K14
2231	A11	6373	K14
2232	A12	6375	G11
2233	B11	6376	H11
2234	B12	7201	N 6
2235	E11	7216	F 8
2237	D11	7241	E13
2238	C12	7242	F13
2239	E14	7243	F13
2240	E12	7246	H16
2250	N 6	7250	N 7
2254	M 9	7251	N 8
2255	N 8	7268	N12
2258	O 5	7270	M13
2260	M11	7272	O16
2261	M11	7273	O13
2262	N11	7274	N15
2263	O11	7380	H12
2270	N14	7381	H13
2272	O14	7384	H14
2330	F12	9019	G16
2380	G13	9204	E 4
2381	H12	9205	C 5
2382	I11	9205	F 5
2386	H15	9206	C 5
3201	D 2	9206	G 5
3201	G 2	9207	D 5
3202	I 6	9207	G 5
3203	C 5	9218	B 5
3203	G 4	9219	M10
3204	B 5	9223	I 7
3204	C 5	9231	A10
3204	F 5	9232	B10
3204	F 5	9235	E10
3209	C 5	9239	N10
3209	G 5	9242	B 5
3210	C 7	9242	E 5
3211	C 7	9243	D10
3212	N 4		
3213	O 4		
3214	B13		
3215	A12		
3216	G 9		
3235	L 7		
3238	D13		
3239	C13		
3240	D13		
3241	D13		
3242	E12		
3243	F13		
3244	F12		
3245	F13		
3246	H16		
3247	F14		
3248	E14		
3249	M 8		
3250	O 7		
3251	N 7		
3252	L 8		
3253	L 9		
3255	N 8		
3266	O11		
3267	N11		
3268	N12		
3270	N13		
3271	N12		
3272	N13		
3273	O14		
3274	N16		
3275	O14		
3275	N14		
3275	N16		
3306	I 7		
3376	H11		
3380	G13		
3381	H13		
3382	H16		
3383	H14		
3387	H15		
4274	N15		
5202	G 3		
5203	A 5		
5203	E 5		
5204	C 3		
5204	A 4		
5230	A 9		
5231	A10		
5233	B10		
5235	E10		
5237	O10		
5241	E14		
5255	L 9		
5260	L10		
5262	N10		
5381	H12		
6201	O 7		
6210	C 8		
6211	C 8		
6212	C 9		
6213	C 9		
6216	G 8		
6230	B11		
6232	A11		
6235	E11		

Picture tube panel / Bildröhren Platte /

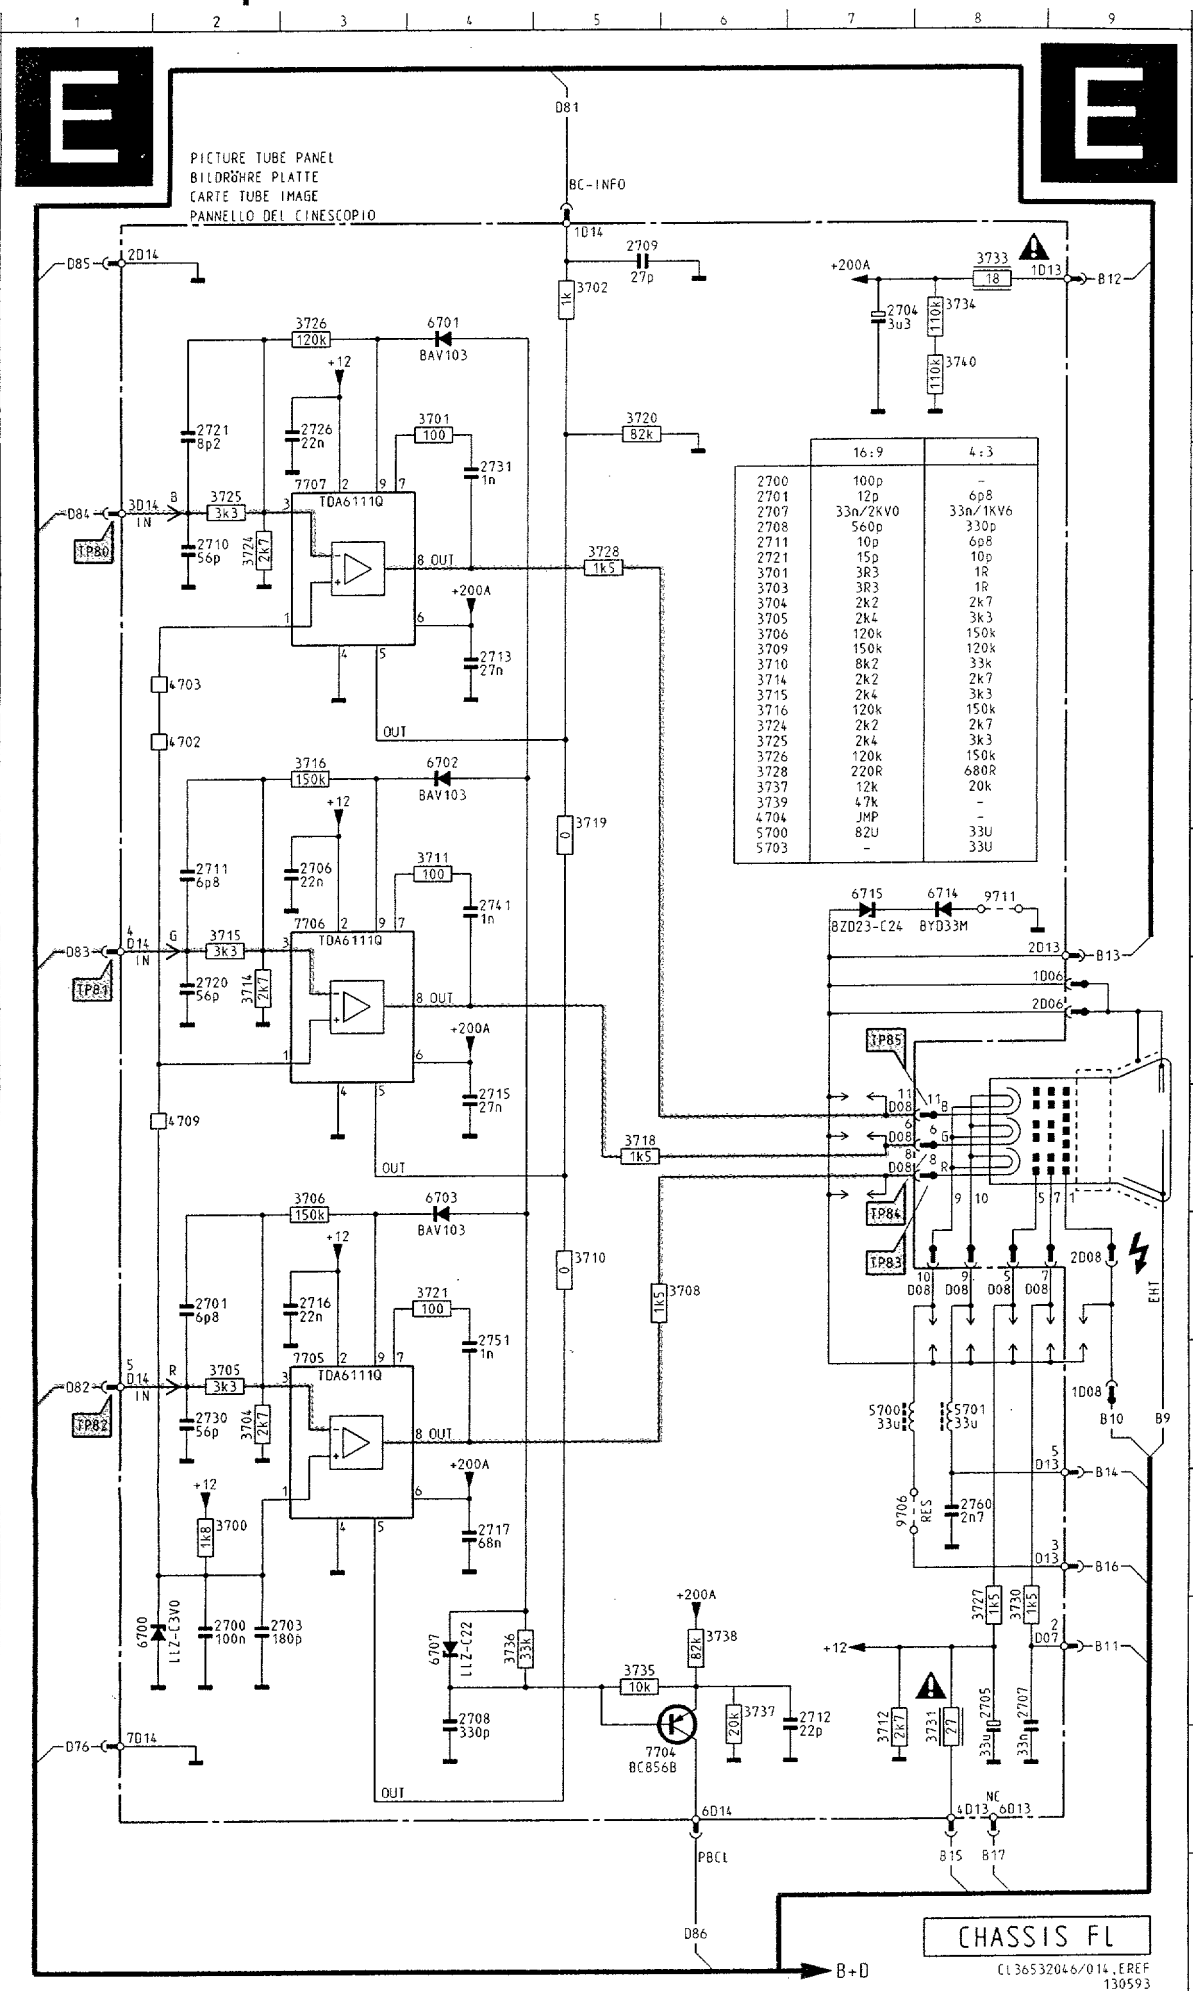

	16:9	4:3
2700	100p	-
2701	12p	6p8
2707	33n/2KV0	33n/1KV6
2708	560p	330p
2711	10p	6p8
2721	15p	10p
3701	3R3	1R
3703	3R3	1R
3704	2k2	2k7
3705	2k4	3k3
3706	120k	150k
3709	150k	120k
3710	8k2	33k
3714	2k2	2k7
3715	2k4	3k3
3716	120k	150k
3724	2k2	2k7
3725	2k4	3k3
3726	120k	150k
3728	220R	680R
3737	12k	20k
3739	47k	-
4704	JMP	-
5700	82U	33U
5703	-	33U

2700	M 2
2701	J 2
2703	M 2
2704	C 7
2705	M 8
2706	G 3
2707	M 8
2708	M 4
2709	B 5
2710	D 2
2711	G 2
2712	M 7
2713	E 4
2715	I 4
2716	J 3
2717	L 4
2720	H 2
2721	C 2
2726	C 3
2730	K 2
2731	D 4
2741	G 4
2751	K 4
2760	L 8
3700	L 2
3701	C 4
3702	B 5
3704	K 2
3705	K 2
3706	I 3
3708	J 6
3710	J 5
3711	G 4
3712	M 7
3714	H 2
3715	G 2
3716	F 3
3718	I 5
3719	F 5
3720	C 5
3721	J 4
3724	D 2
3726	C 3
3727	M 8
3728	D 5
3730	M 8
3731	M 8
3733	B 8
3734	B 8
3735	M 5
3736	M 4
3737	M 6
3738	M 6
3740	C 8
4702	F 2
4703	E 2
4709	I 2
5700	K 7
5701	K 8
6700	M 1
6701	C 4
6702	F 4
6703	I 4
6707	M 4
6714	G 8
6715	G 7
7704	N 6
7705	K 3
7706	G 3
7707	D 3
9706	L 7
9711	G 8

Platines Tube-image

Videocolor picture tube (36")

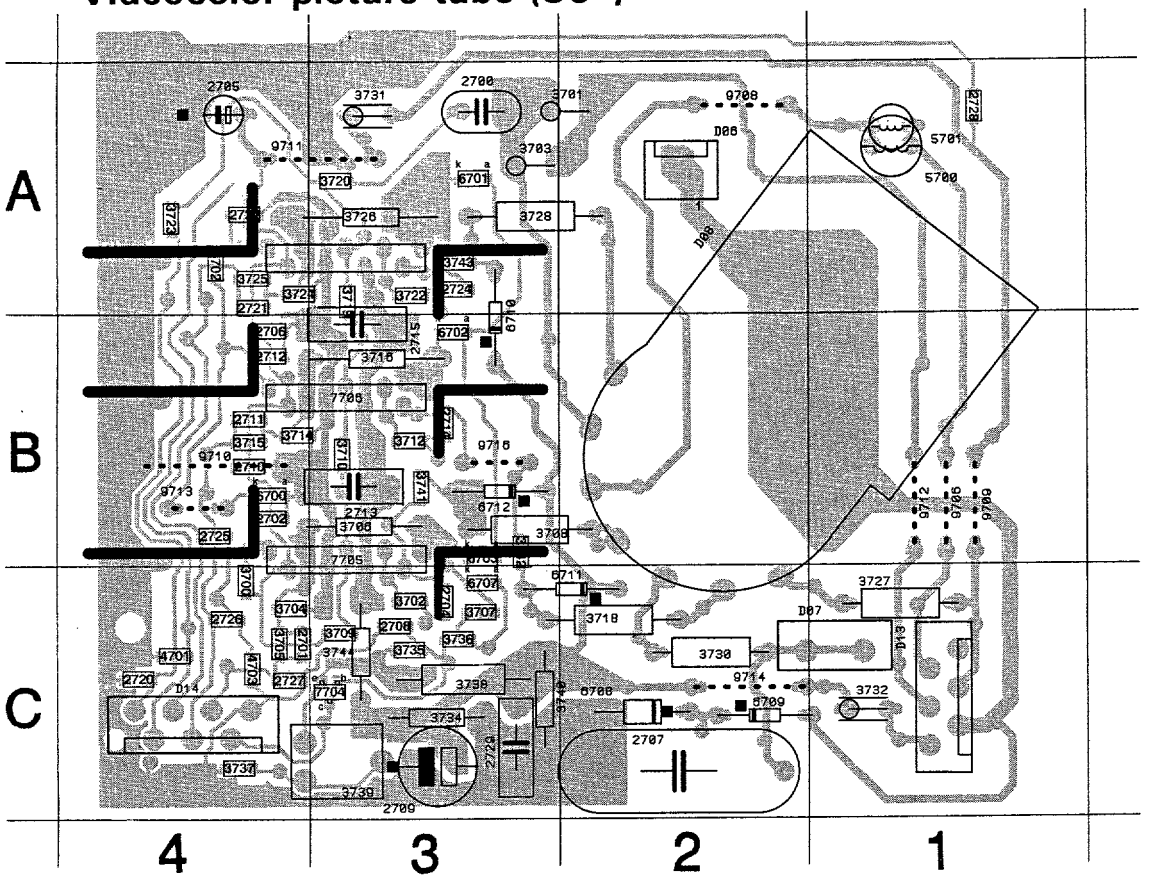

D06 A2	3708 B3	6701 A3
D07 C1	3709 C3	6702 B3
D08 B2	3710 B3	6703 B3
D13 C1	3712 B3	6707 C3
D14 C4	3714 B4	6708 C2
2700 A3	3715 B4	6709 C2
2701 C4	3716 B3	6710 B3
2702 B4	3718 C2	6711 C3
2704 C3	3719 A3	6712 B3
2705 A4	3720 A3	7704 C4
2706 B4	3722 A3	7705 B3
2707 C3	3723 A4	7706 B3
2708 C3	3724 A4	7707 A3
2709 C3	3725 A4	9706 B1
2710 B4	3726 A3	9708 A2
2711 B4	3727 C1	9709 B1
2712 B4	3728 A3	9710 B4
2713 B3	3730 C2	9711 A4
2714 B3	3731 A3	9712 B1
2715 B3	3732 C1	9713 B4
2720 C4	3734 C3	9714 C2
2721 A4	3735 C3	9716 B3
2722 A4	3736 C3	
2724 A3	3737 C4	
2725 B4	3738 C3	
2726 C4	3739 C3	
2727 C4	3740 C3	
2728 A1	3741 B3	
2729 C3	3742 B3	
3700 C4	3743 A3	
3701 A3	3744 C3	
3702 C3	4701 C4	
3703 A3	4702 A4	
3704 C4	4703 C4	
3705 C4	5700 A1	
3706 B3	5701 A1	
3707 C3	6700 B4	

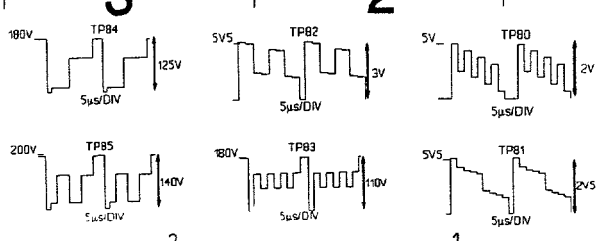

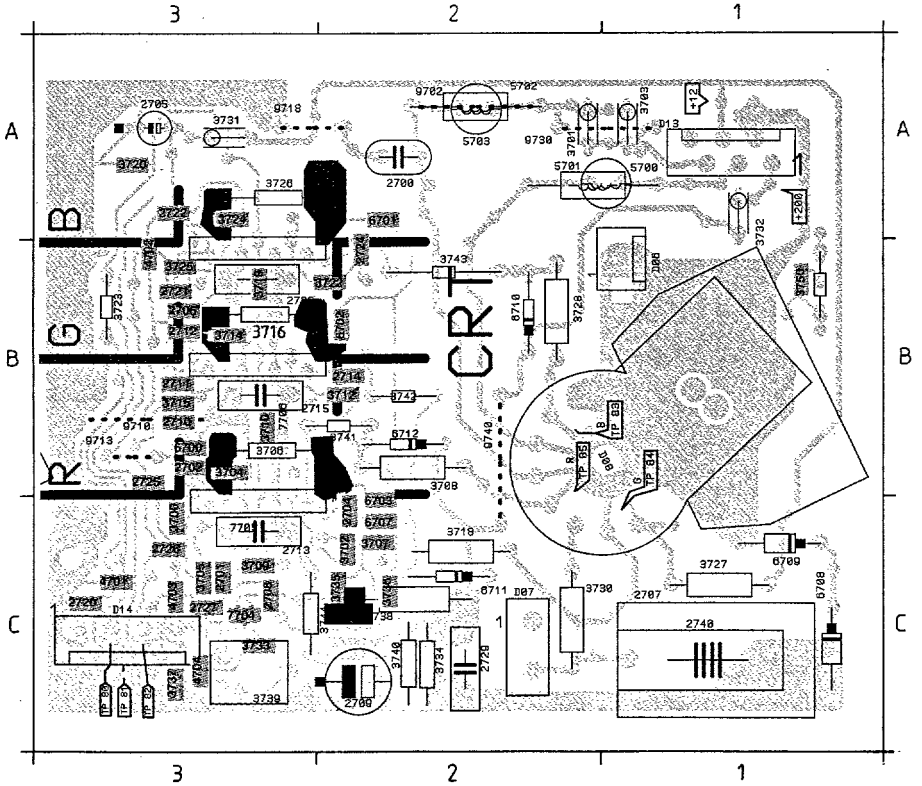

D06	B1	3708	B2	5701	A2
D07	C2	3709	C3	5702	A2
D08	B1	3710	B3	5703	A2
D13	A1	3712	B2	6700	B3
D14	C3	3714	B3	6701	A2
2700	A2	3715	B3	6702	B2
2701	C3	3716	B3	6703	C2
2702	B3	3718	C2	6707	C2
2703	B3	3719	B3	6708	C1
2704	C2	3720	A3	6709	C1
2705	A3	3722	B2	6710	B2
2706	B3	3723	B3	6711	C2
2707	C1	3724	A3	6712	B2
2708	C3	3725	B3	7704	C3
2709	C2	3726	A3	7705	C3
2710	B3	3727	C1	7706	B3
2711	B3	3728	B2	7707	B3
2712	B3	3730	C2	9702	A2
2713	C3	3731	A3	9710	B3
2714	B2	3732	A1	9713	B3
2715	B3	3733	C3	9718	A3
2720	C3	3734	C2	9730	A1
2721	B3	3735	C2	9740	B2
2722	A3	3736	C2		
2724	B2	3738	C2		
2725	B3	3739	C3		
2726	C3	3740	C2		
2727	C3	3741	B2		
2729	C2	3742	B2		
2740	C1	3743	B2		
3700	C3	3744	C3		
3701	A2	3750	B1		
3702	C2	3751	B1		
3703	A1	4701	C3		
3704	B3	4702	B3		
3705	C3	4703	C3		
3706	B3	4704	C3		
3707	C2	5700	A1		

Picture tube panel 36"

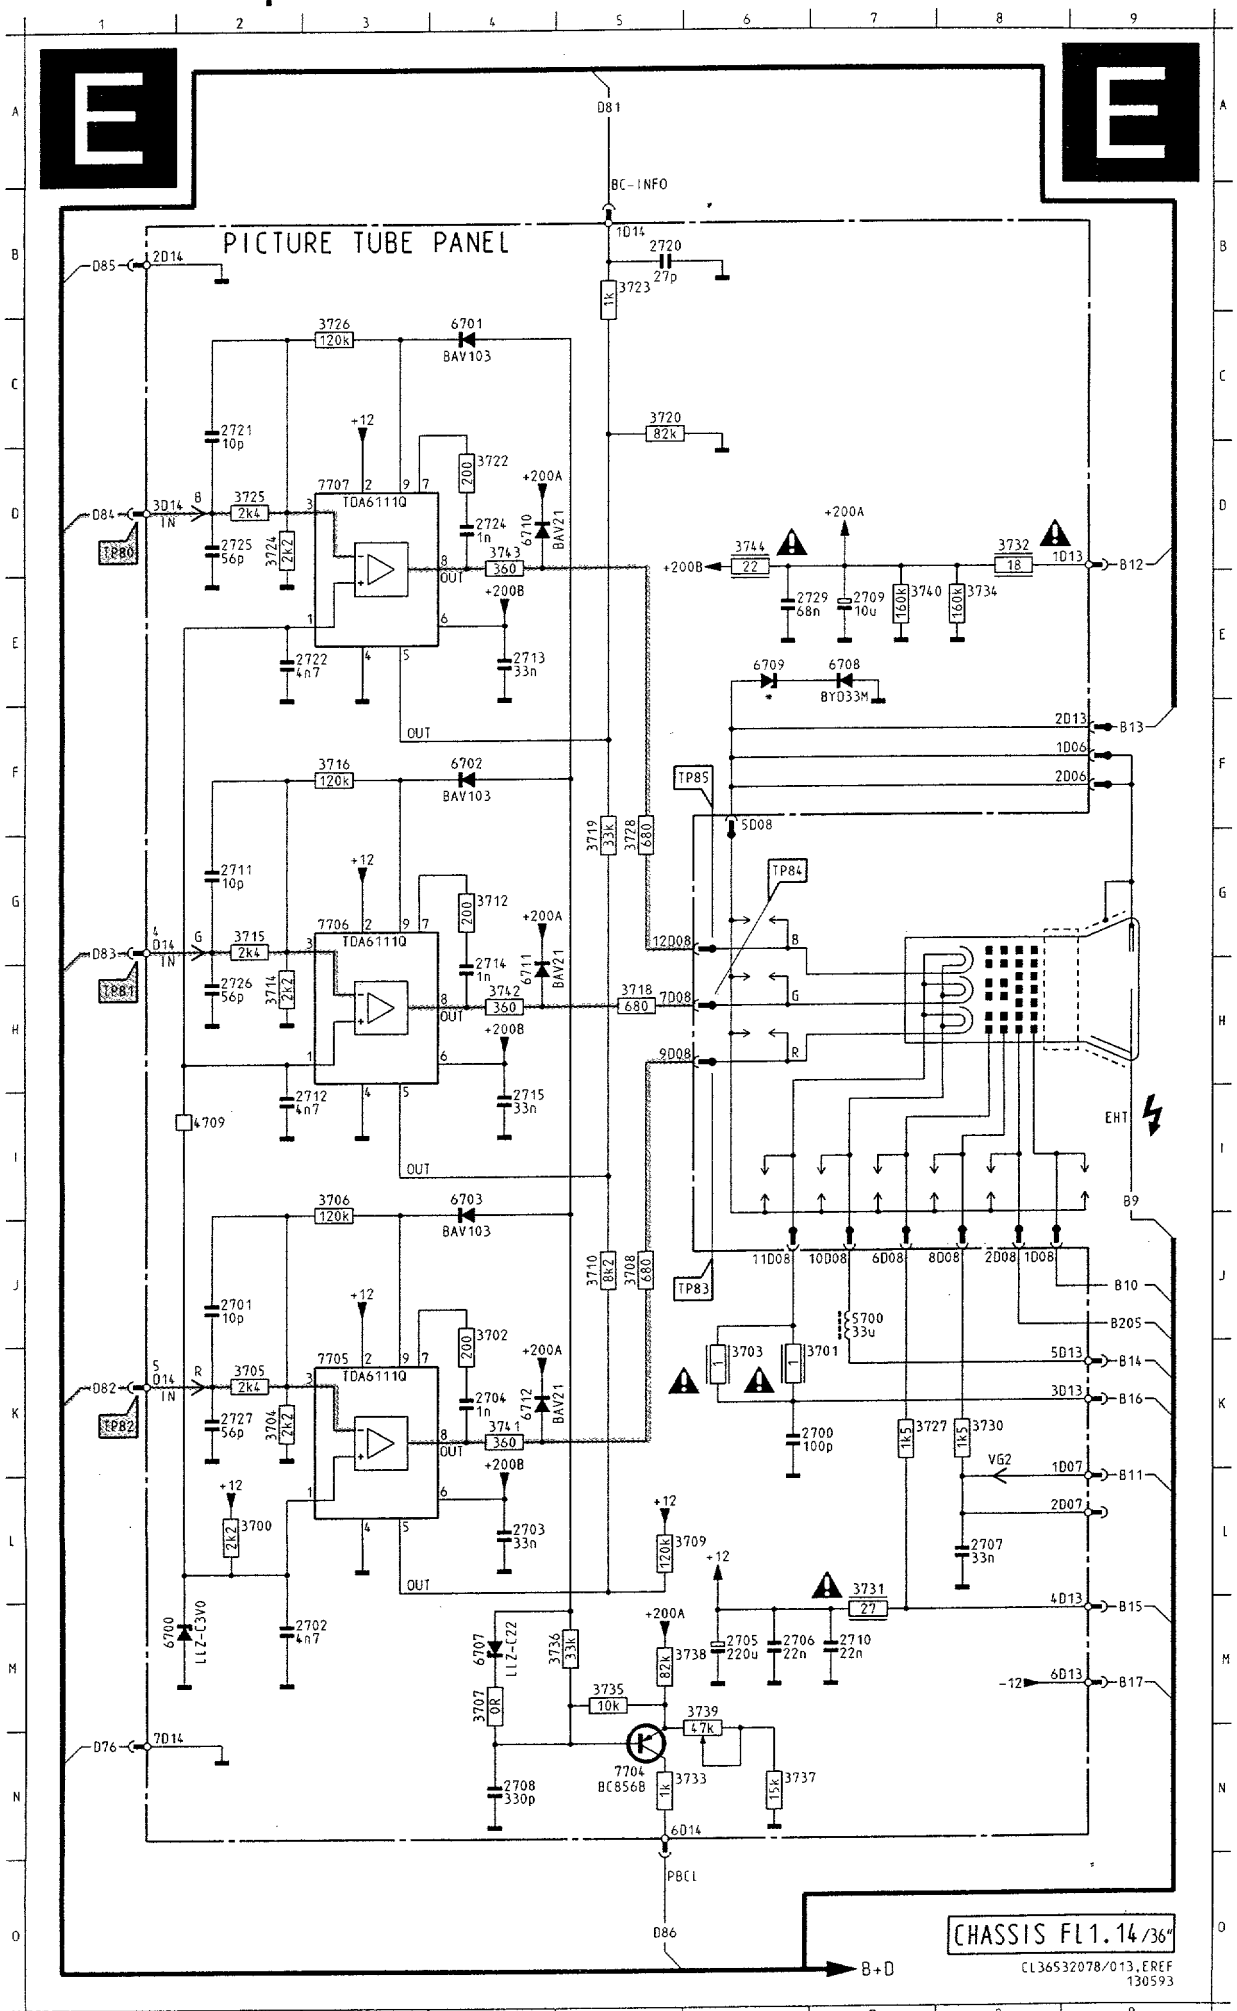

3	6701	A3
3	6702	B3
3	6703	B3
3	6707	C3
4	6708	C2
4	6709	C2
3	6710	B3
2	6711	C3
3	6712	B3
3	7704	C4
3	7705	B3
4	7706	B3
4	7707	A3
4	9706	B1
3	9708	A2
1	9709	B1
3	9710	B4
2	9711	A4
3	9712	B1
1	9713	B4
3	9714	C2
3	9716	B3
3		
4		
3		
3		
3		
3		
3		
3		
4		
4		
4		
1		
1		
4		

5701	A2	
5702	A2	
5703	A2	
6700	B3	
6701	A2	
6702	B2	
6703	C2	
6707	C2	
6708	C1	
6709	C1	
6710	B2	
6711	C2	
6712	B2	
7704	C3	
7705	C3	
7706	B3	
7707	B3	
9702	A2	
9710	B3	
9713	B3	
9718	A3	
9730	A1	
9740	B2	

2700	K	6
2701	J	2
2702	M	2
2703	L	4
2704	K	4
2705	M	6
2706	M	6
2707	L	8
2708	N	4
2709	E	7
2710	M	7
2711	G	2
2712	I	2
2713	E	4
2714	H	4
2715	I	4
2720	B	5
2721	C	2
2722	E	2
2724	D	4
2725	D	2
2726	H	2
2727	K	2
2729	E	6
3700	L	2
3701	K	6
3702	J	4
3703	K	6
3704	K	2
3705	K	2
3706	I	3
3707	M	4
3708	J	5
3709	L	5
3710	J	5
3712	G	4
3714	H	2
3715	G	2
3716	F	3
3718	H	5
3719	G	5
3720	C	5
3722	D	4
3723	B	5
3724	D	2
3726	C	3
3727	K	7
3728	G	5
3730	K	8
3731	L	7
3732	D	8
3733	N	5
3734	E	8
3735	M	5
3736	M	5
3737	N	6
3738	M	5
3739	M	6
3740	E	7
3741	K	4
3742	H	4
3743	D	4
3744	D	6
4709	I	2
5700	J	7
6700	M	1
6701	C	4
6702	F	4
6703	I	4
6707	M	4
6708	E	7
6709	E	6
6710	D	4
6711	H	4
6712	K	4
7704	N	5
7705	K	3
7706	G	3
7707	D	3



Audio amplification / Tonsignal Verstärker /

G

Main sound output amplifiers
Haupt-Tonendstufen
Amplificatori di potenza del suono
Amplificateurs principaux de sortie son

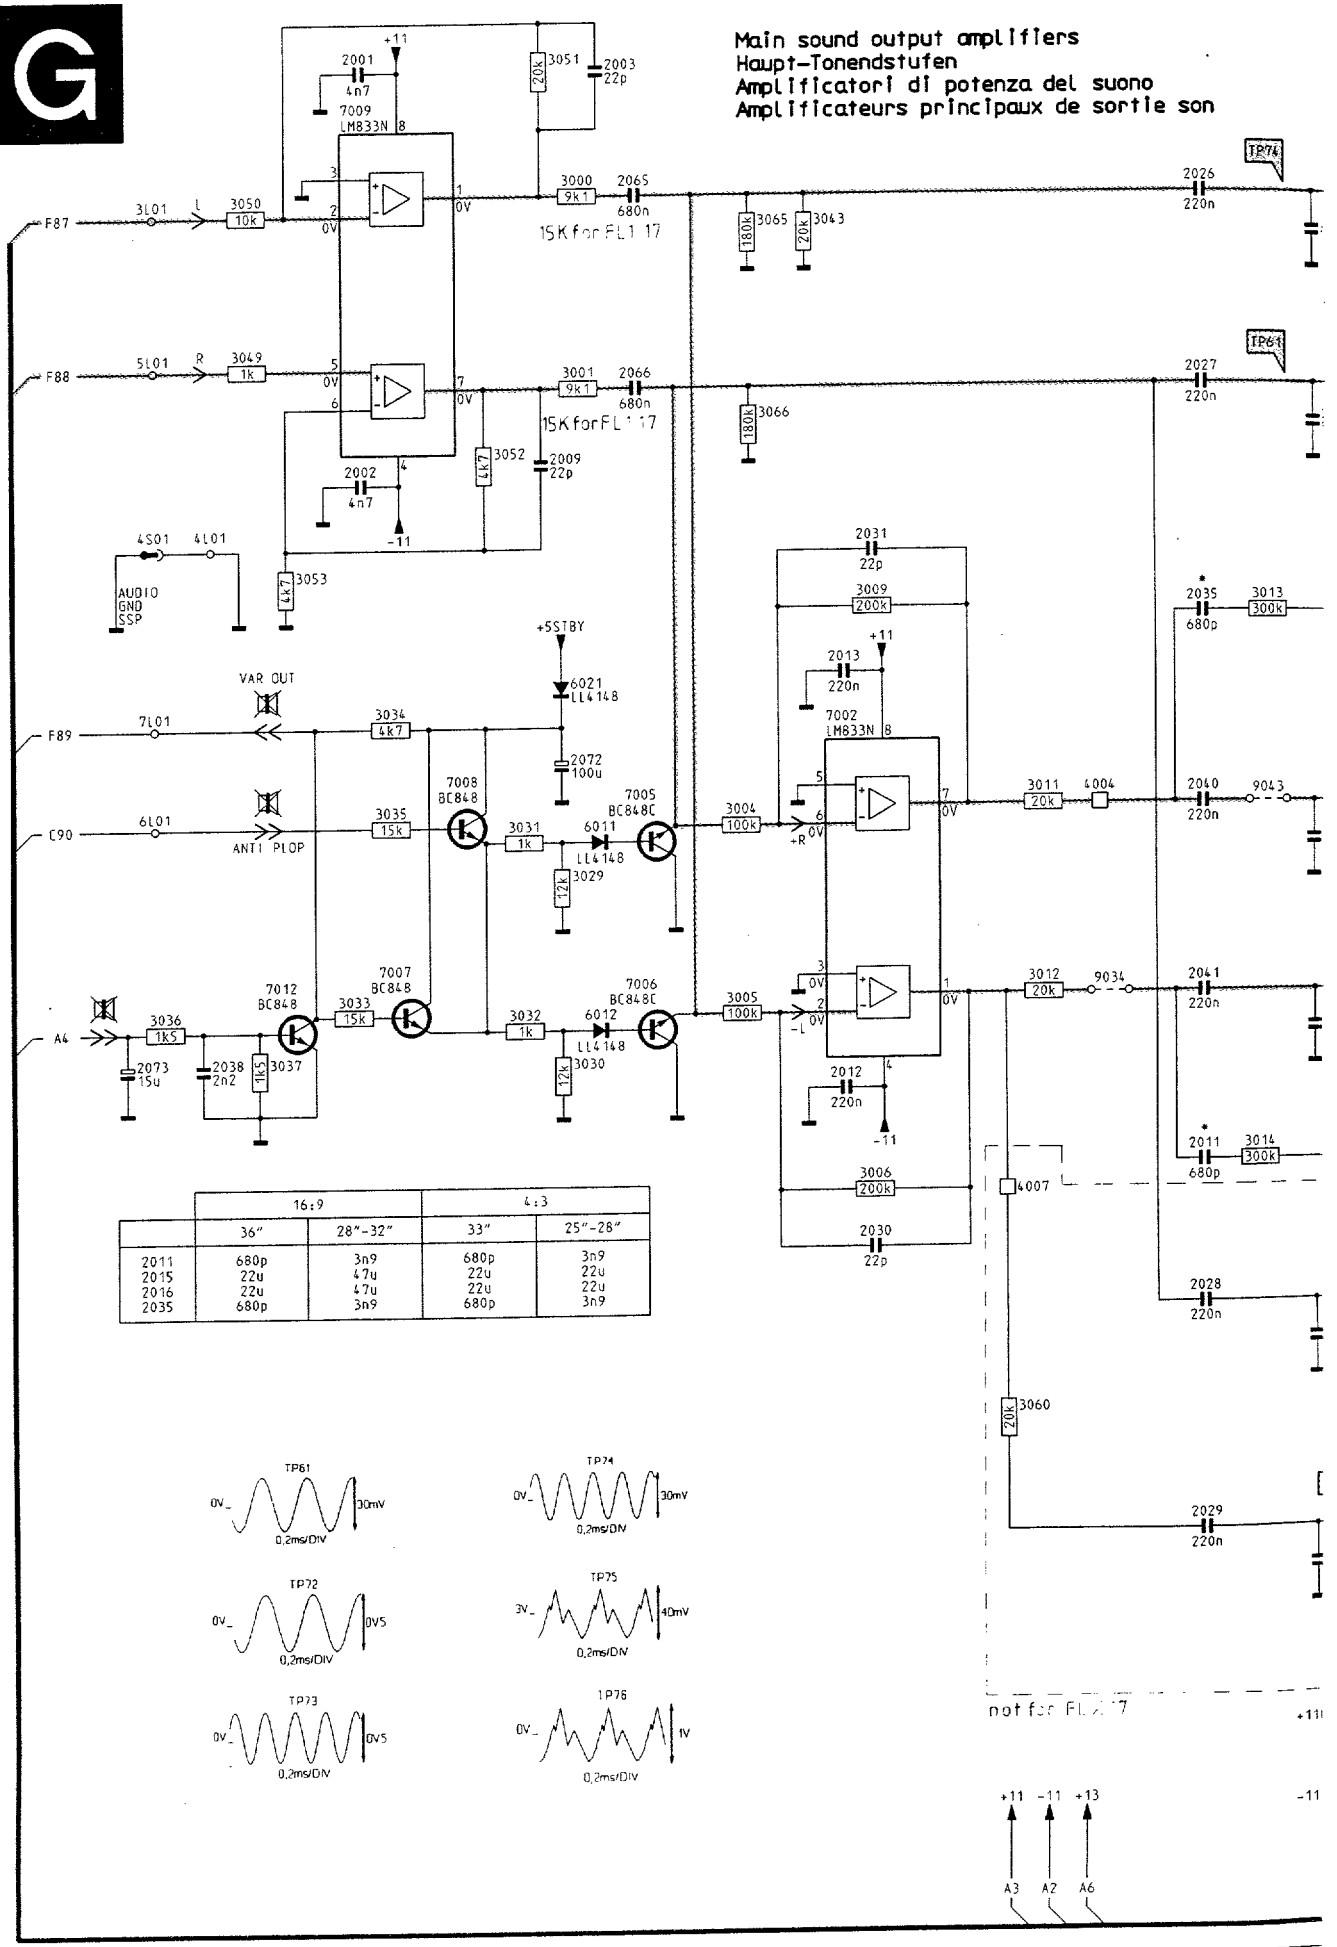

	16:9		4:3	
	36"	28"-32"	33"	25"-28"
2011	680p	3n9	680p	3n9
2015	22u	47u	22u	22u
2016	22u	47u	22u	22u
2035	680p	3n9	680p	3n9

Amplificateur audio

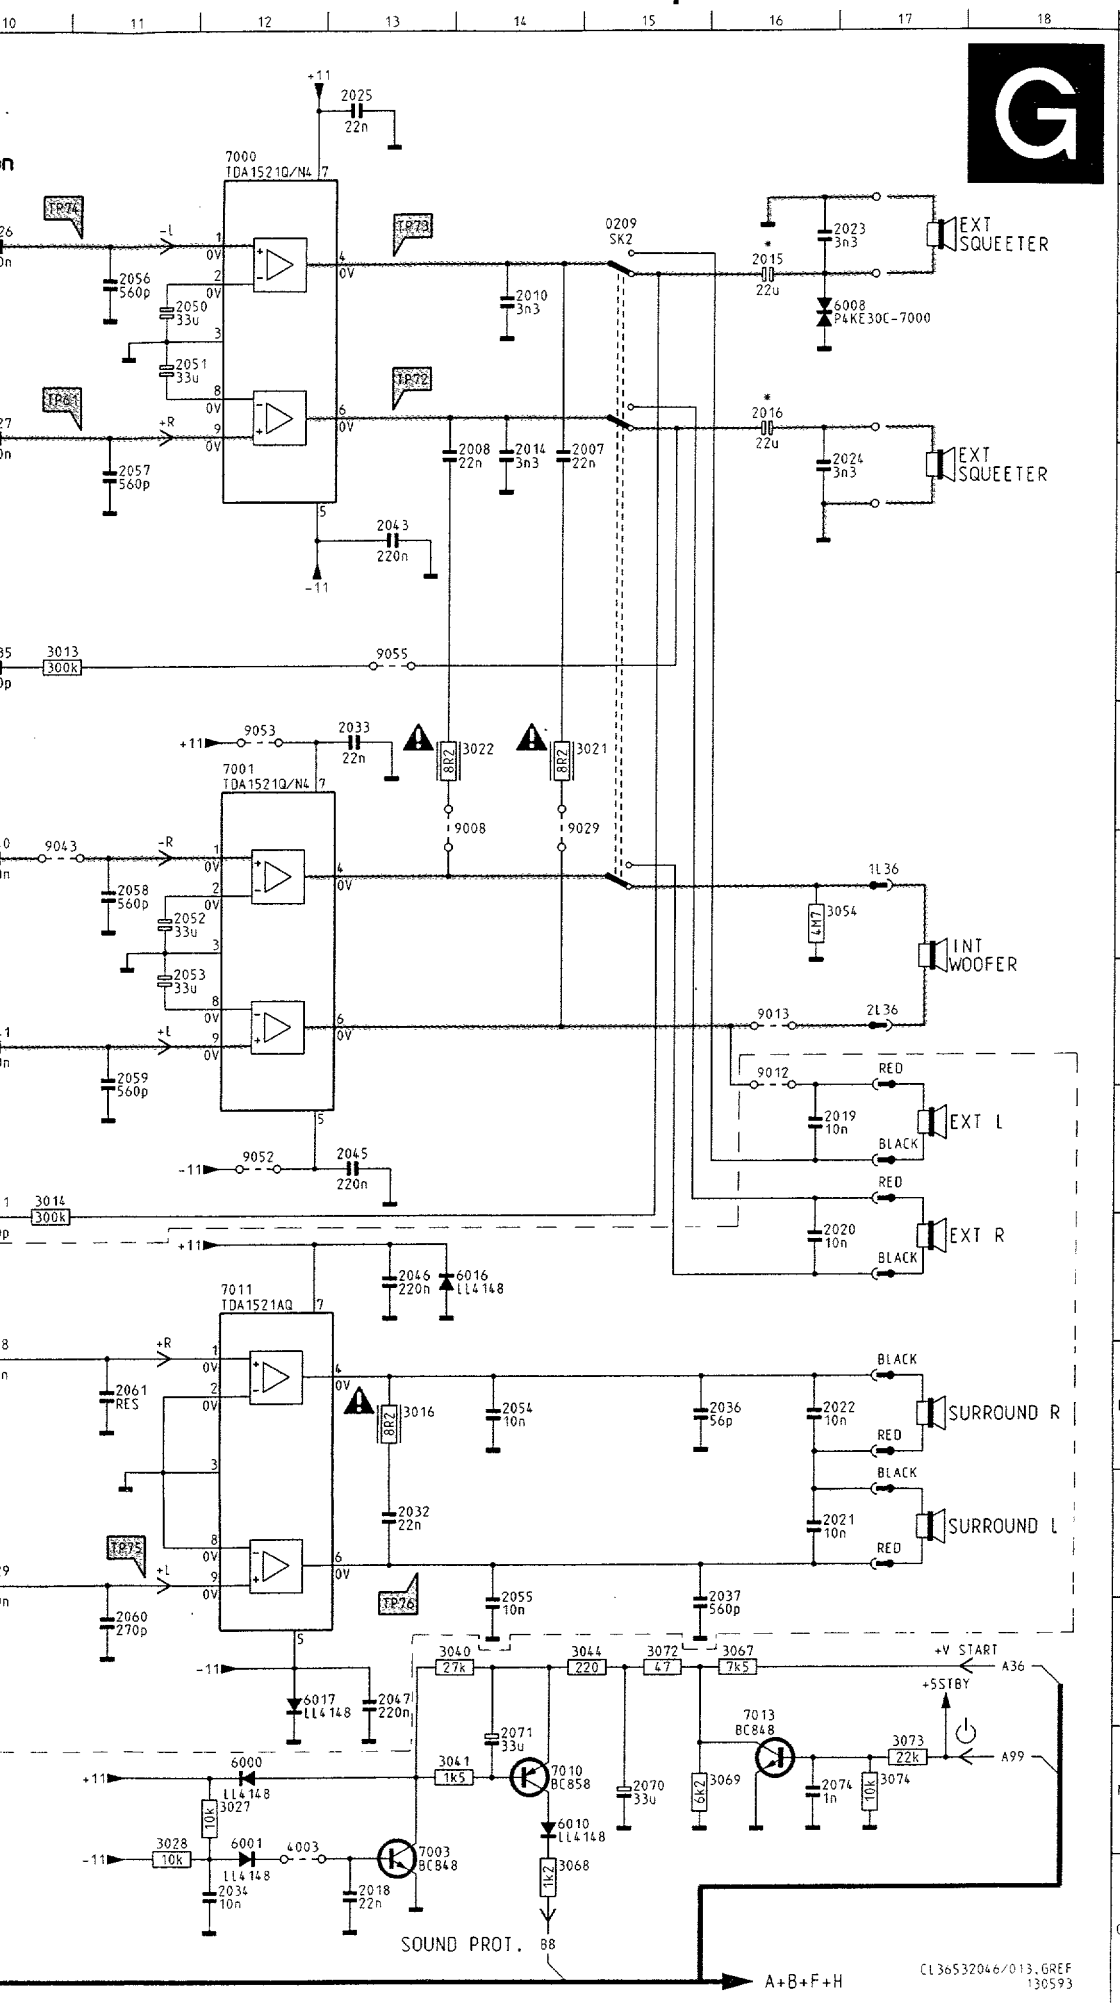

	0209	B15	7001	F12
	2001	A 3	7002	F 7
	2002	D 3	7003	O13
	2003	A 5	7005	G 5
A	2007	D14	7006	H 5
	2008	D14	7007	H 3
	2009	D 5	7008	G 4
	2010	B14	7009	A 3
	2011	I10	7010	N14
	2012	I 7	7011	J12
	2013	F 7	7012	H 3
	2014	D14	7013	M16
B	2015	B16	9008	F14
	2016	C16	9012	H16
	2018	O13	9013	H16
	2019	I16	9029	F14
	2020	J16	9034	H 9
	2021	L16	9043	G10
	2022	K16	9052	I12
	2023	B16	9053	F12
C	2024	O16	9055	E13
	2025	A13		
	2026	B10		
	2027	C10		
	2028	K10		
	2029	L10		
	2030	J 7		
D	2031	E 7		
	2032	L13		
	2033	F13		
	2034	O12		
	2035	E10		
	2036	K16		
	2037	M16		
	2038	I 2		
E	2040	G10		
	2041	H10		
	2043	D13		
	2045	I13		
	2046	J13		
	2047	M13		
	2050	B11		
	2051	C11		
F	2052	G11		
	2053	H11		
	2054	K14		
	2055	M14		
	2056	B11		
	2057	D11		
	2058	G11		
G	2059	H11		
	2060	M11		
	2061	K11		
	2065	B 5		
	2066	C 5		
	2070	N15		
	2071	N14		
	2072	F 5		
H	2073	I 2		
	2074	N16		
	3000	B 5		
	3001	C 5		
	3004	G 6		
	3005	H 6		
	3006	J 7		
I	3009	E 7		
	3011	G 9		
	3012	H 9		
	3013	E10		
	3014	I10		
	3016	K13		
	3021	F14		
	3022	F14		
J	3027	N12		
	3028	N11		
	3029	G 5		
	3030	I 5		
	3031	G 5		
	3032	H 5		
	3033	H 3		
K	3034	F 4		
	3035	G 4		
	3036	H 2		
	3037	I 3		
	3040	M14		
	3041	N14		
	3043	B 7		
	3044	M15		
L	3049	C 2		
	3050	B 2		
	3051	A 5		
	3052	D 4		
	3053	E 3		
	3054	G16		
	3060	K 8		
M	3065	B 6		
	3066	D 6		
	3067	M16		
	3068	O14		
	3069	N16		
	3072	M15		
	3073	N17		
	3074	N17		
N	4003	N12		
	4004	G 9		
	4007	J 8		
	6000	N12		
	6001	N12		
	6008	B16		
	6010	N14		
	6011	G 5		
O	6012	H 5		
	6016	J14		
	6017	M12		
	6021	F 5		
	7000	A12		

Large signal panel FL X.16/.17 /

L01	F1	2072	D4	2524	D1	3214	E5	3421	B3	3548	D2	4538	C3	6417	B3
L02	E1	2073	D4	2526	C1	3215	E5	3422	B3	3549	D2	5204	H2	6440	B3
L03	A1	2074	A5	2527	C1	3216	F4	3423	B3	3550	B4	5230	F4	6441	B3
L08	C4	2200	H3	2528	C1	3220	G4	3424	B2	3553	B4	5231	E5	6451	B1
L13	C4	2202	G2	2529	F1	3230	F3	3425	B3	3554	B4	5233	E4	6452	B1
L27	B3	2203	H2	2530	F1	3234	B4	3426	A2	3555	B3	5235	E4	6453	B1
L28	G1	2210	F4	2531	D3	3235	B4	3427	B3	3556	B3	5237	E3	6465	A1
L30	A1	2211	F4	2533	D3	3236	B4	3428	C3	3557	C4	5241	C4	6466	A1
L31	E2	2214	G4	2534	D3	3237	C4	3429	B3	3558	B3	5255	F3	6467	A1
L33	G2	2215	G4	2535	C4	3238	C4	3430	B3	3559	B4	5260	E3	6480	F1
L34	G2	2216	G5	2536	D3	3239	D3	3431	B3	3560	C3	5262	E3	6481	F1
L35	G3	2218	F5	2537	D3	3240	E3	3437	A1	3561	C3	5308	H5	6504	D1
L36	A2	2219	F5	2541	D4	3241	B4	3438	B2	3562	B4	5310	H5	6506	C1
L37	A3	2230	B4	2542	C4	3243	B4	3439	B3	3563	B4	5381	E3	6507	B4
L38	A2	2231	E4	2543	C4	3245	B4	3440	B1	3600	B2	5503	B1	6515	C3
L39	F3	2232	E5	2545	C4	3246	E1	3441	B3	3601	C2	5504	C1	6516	C3
L40	E3	2233	E4	2546	D2	3247	B4	3442	B3	3602	B2	5506	C1	6517	C3
L61	G2	2234	E5	2547	C2	3248	B4	3443	C3	3603	B2	5510	D1	6519	E2
L62	E5	2235	D3	2552	B4	3249	F3	3444	B2	3604	B2	5511	D3	6520	E2
L65	G2	2236	D4	2553	B4	3250	F3	3446	B2	3605	C3	5514	F2	6526	C1
L67	D4	2237	E3	2554	D4	3251	F3	3450	A1	3606	B2	5520	E2	6527	C1
L68	C3	2238	D4	2555	B3	3252	F3	3451	A1	3607	B2	5521	E1	6529	F1
L69	A2	2240	D4	2556	B4	3253	F2	3452	B1	3608	F1	5522	E2	6535	D3
L80	G4	2241	B4	2600	F1	3255	F3	3455	A1	3609	F1	5524	D1	6536	C3
L87	B2	2242	B4	2601	B2	3266	F2	3456	A2	3610	F1	5525	C4	6538	B2
SK1	G3	2250	F3	2603	C2	3267	F2	3457	A2	3611	F1	5526	E1	6542	C4
SK2	B3	2254	F2	2604	B2	3268	G2	3458	A1	3612	E1	5527	C1	6546	C2
0207	A4	2255	F3	2605	F1	3270	F2	3459	A1	3614	F1	5528	C2	6547	D3
0211	A3	2258	F3	2606	C3	3271	F2	3460	B1	3615	F1	5534	D3	6551	B4
039	H5	2259	F3	2607	B3	3272	F2	3461	A1	3616	F1	5536	D3	6601	E1
040	H4	2260	E3	2609	F1	3273	G2	3462	A1	3617	F1	5543	D4	6629	B2
1200	G3	2261	E3	2610	F1	3274	G1	3463	A1	3618	B2	5548	D1	7000	C5
2001	G1	2262	E3	2611	F1	3275	G2	3464	A1	3619	F1	5555	D3	7001	D5
2002	G1	2263	E2	2613	F1	3298	F5	3465	A2	3620	F1	6000	A5	7002	C5
2003	G1	2270	G1	2614	F1	3299	F5	3466	A1	3621	E1	6001	A5	7003	A5
2004	G1	2272	G2	2626	A2	3300	H5	3467	B2	3622	E1	6008	A3	7005	D5
2005	G1	2302	H5	3000	D4	3304	H5	3468	A1	3623	E1	6010	A5	7006	D5
2007	B5	2303	H5	3001	D5	3305	H5	3469	A1	3624	E1	6011	D5	7007	D5
2008	B5	2308	H5	3004	C5	3306	F3	3470	A1	3625	E1	6012	D5	7008	D5
2009	G1	2321	H5	3005	D5	3308	H5	3471	A1	3626	B2	6016	B5	7009	G1
2010	A4	2331	H4	3006	C5	3309	H5	3473	B1	3627	A1	6017	E4	7010	A5
2011	D5	2351	H4	3008	C5	3310	H5	3474	A2	3628	A1	6021	D4	7011	B5
2012	C5	2360	H4	3009	C5	3311	H5	3479	F2	3629	B2	6201	F3	7012	D4
2013	C5	2361	H4	3011	C5	3312	H5	3480	B1	3630	A2	6210	G3	7013	A5
2014	A3	2365	H4	3012	C5	3313	H5	3481	F2	3631	A2	6211	F3	7201	F3
2015	A3	2372	H4	3013	D4	3314	H5	3482	F2	3632	C3	6212	F4	7216	G5
2016	A3	2374	H4	3014	D4	3317	H5	3483	B3	3633	A2	6213	F4	7241	B4
2018	A5	2376	H4	3016	B5	3320	H5	3484	B3	3634	A1	6216	F5	7242	B4
2019	A4	2380	E3	3019	B5	3321	H5	3485	E2	4000	A5	6220	G4	7246	E1
2020	A4	2381	E3	3020	B5	3322	H5	3490	B3	4001	D5	6221	G5	7250	F3
2021	A4	2382	E3	3021	B5	3331	H4	3500	B2	4002	B5	6230	E4	7251	F3
2022	A4	2386	E3	3022	B5	3332	H4	3501	B2	4003	A5	6231	E4	7268	F2
2023	A3	2401	B3	3027	A5	3350	H4	3502	B1	4004	C5	6232	E4	7270	F2
2024	A3	2402	A2	3028	A5	3351	H4	3503	B1	4005	C5	6233	E4	7272	G2
2025	C5	2403	A2	3029	D5	3356	H4	3504	D1	4006	D5	6235	D3	7273	F2
2026	B5	2404	A2	3030	D5	3357	H4	3505	D1	4007	C5	6237	E3	7274	G1
2027	C5	2405	A2	3031	D5	3358	H4	3506	C1	4010	A3	6238	E3	7305	H5
2028	B5	2406	B3	3032	D5	3360	H4	3507	D1	4011	B3	6247	B4	7311	H5
2029	B5	2407	B2	3033	D4	3362	H4	3508	C2	4012	A3	6251	F3	7312	H5
2030	C5	2408	C3	3034	D4	3364	H4	3509	C2	4019	E3	6260	E3	7318	H5
2031	C5	2409	B2	3035	D5	3365	H4	3510	D1	4039	B1	6262	E3	7320	H4
2032	B5	2410	B2	3036	D4	3366	H4	3512	C3	4274	G2	6266	F2	7321	F3
2033	D5	2411	B2	3037	D4	3368	H4	3513	C3	4400	B1	6272	G2	7360	H4
2034	A5	2412	C3	3040	A5	3369	H4	3514	F2	4410	B2	6280	C4	7369	H4
2035	C5	2415	A3	3041	A5	3370	H4	3515	C2	4411	B2	6302	H5	7370	H4
2036	A4	2416	B3	3042	A5	3371	H4	3516	C2	4412	B2	6303	H5	7371	H4
2037	A4	2417	B3	3043	C4	3372	H4	3517	C2	4413	B3	6304	H5		
2038	D4	2418	A3	3044	A5	3374	H4	3518	E2	4415	E2	6305	H5		
2039	A4	2419	A2	3049	G1	3375	H4	3519	E2	4416	B2	6306	F3		
2040	D5	2450	A1	3050	G1	3376	E3	3520	E2	4417	B2	6308	H5		
2041	D5	2451	B1	3051	G1	3378	H4	3521	E2	4420	A2	6312	H5		
2042	C5	2452	B1	3052	G1	3380	E3	3522	E2	4421	B2	6314	H5		
2043	C5	2454	A2	3053	G1	3381	E3	3524	D1	4465	A1	6315	H5		
2044	D5	2455	B1	3054	A2	3382	E3	3525	C4	4466	A1	6318	H5		
2045	D5	2456	A2	3060	B5	3383	E3	3526	C1	4467	A1	6319	H5		
2046	B5	2457	A2	3061	B5	3385	E3	3527	F1	4468	B2	6321	F3		
2047	B5	2458	B1	3065	C4	3402	A2	3528	D3	4469	A1	6331	H4		
2048	B1	2459	B1	3066	C5	3403	A2	3529	F1	4507	D4	6349	H4		
2049	A4	2460	B1	3067	A4	3404	B2	3530	F2	4517	B3	6350	H4		
2050	C5	2480	E2	3068	A4	3405	B3	3532	C3	4518	B4	6351	H4		
2051	C5	2502	B2	3069	A4	3406	B3	3533	C3	4519	C3	6352	E3		
2052	D5	2503	B2	3072	A5	3407	B3	3534	D3	4521	C4	6353	E3		
2053	D5	2504	D1	3073	F5	3408	B3	3535	D3	4522	C4	6355	H4		
2054	B5	2505	D1	3074	A5	3409	B3	3536	D3	4524	C4	6356	H4		
2055	B5	2509	D2	3201	H3	3410	B3	3537	F2	4525	C4	6357	H4		
2056	C5	2511	C2	3202	F5	3411	B2	3538	D3	4527	D3	6370	H4		
2057	C5	2512	C3	3203	H2	3412	B3	3539	D1	4528	D4	6371	H4		
2058	D5	2513	C3	3204	H1	3413	B3	3540	C4	4529	D4	6372	E3		
2059	D5	2517	C3	3205	G1	3414	B3	3541	C4	4530	D2	6373	E3		
2060	B5	2518	C3	3206	G1	3415	B3	3542	C4	4531	D2	6375	E3		
2061	B5	2519	E2	3209	G1	3416	B3	3543	C4	4533	C2	6376	E3		
2065	C4	2520	D2	3210	F3	3417	B3	3544	C4	4534	C3	6402	B3		
2066	D5	2521	D1	3211	G3	3418	B3	3545	E2	4535	C1	6403	C3		
2070	A4	2522	D1	3212	F3	3419	B3	3546	C4	4536	C1	6404	C3		
2071	A5	2523	C1	3213	F3	3420	B3	3547	C2	4537	C3	6405	B1		

7380	E3	9045	D4	9406	B2
7381	E3	9046	D4	9407	B2
7384	E3	9047	E5	9450	B1
7400	B3	9048	D4	9451	A1
7402	C3	9050	A3	9453	B2
7403	A1	9051	D4	9454	B2
7407	B3	9052	D4	9456	B2
7417	B3	9053	D5	9457	A1
7444	B2	9054	D4	9459	A3
7445	B2	9055	A4	9460	B2
7450	A1	9056	A4	9461	B3
7451	A1	9057	C5	9462	C4
7469	B2	9058	G2	9468	B3
7480	F2	9059	G1	9471	B2
7481	E2	9060	G1	9472	A2
7501	B2	9063	B5	9473	B2
7504	D1	9064	B5	9500	D2
7506	D1	9065	B4	9501	D2
7512	C3	9066	B5	9504	D2
7513	C3	9067	A3	9505	C1
7530	F1	9068	G3	9506	D1
7540	C4	9200	E5	9507	C2
7541	C4	9201	F5	9508	B2
7542	C4	9202	D3	9510	D2
7543	D2	9203	D4	9511	C2
7550	D3	9204	G2	9513	D1
7551	B4	9205	H1	9521	E1
7552	B4	9206	H1	9522	E1
7601	F1	9207	G1	9524	D1
7602	F1	9216	G2	9530	B2
7603	F1	9217	G2	9533	C2
7608	F1	9218	H1	9534	C2
7610	E1	9219	E3	9535	C3
7616	A1	9220	G4	9537	C3
7618	A2	9221	G3	9539	C3
9000	A4	9222	F3	9541	D2
9001	C5	9223	F4	9542	C2
9002	A3	9224	F5	9543	C2
9003	A4	9225	E3	9544	D1
9008	B5	9228	E4	9545	C1
9010	C5	9229	E5	9547	D1
9012	A4	9230	F3	9548	D1
9013	A4	9231	E5	9549	E1
9015	B4	9232	E4	9550	C1
9017	B5	9233	F2	9551	C1
9020	D5	9234	F1	9552	F1
9022	A3	9235	E4	9556	C1
9023	A4	9236	F1	9557	E2
9024	A4	9237	F1	9560	D3
9025	A5	9238	G3	9561	D3
9026	A4	9239	B4	9562	C3
9027	A5	9240	B4	9563	C3
9028	A5	9241	E3	9565	B4
9029	B5	9242	G2	9566	D3
9031	C4	9243	E3	9567	D3
9032	C5	9244	B4	9601	E1
9033	C5	9246	E1	9614	E2
9034	C5	9250	F2	9615	B2
9035	A4	9251	F2		
9036	A4	9300	H5		
9037	B3	9302	H4		
9038	B3	9385	E2		
9039	B1	9400	C1		
9041	C4	9401	B2		
9042	C4	9402	B3		
9043	D5	9405	A1		

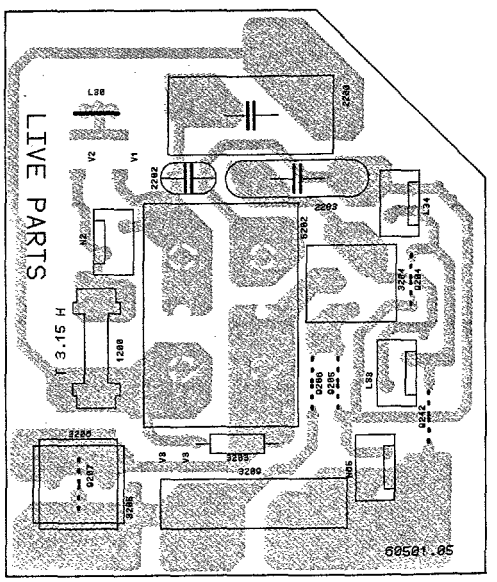

Groß-signal Platte FL X.16/.17 /

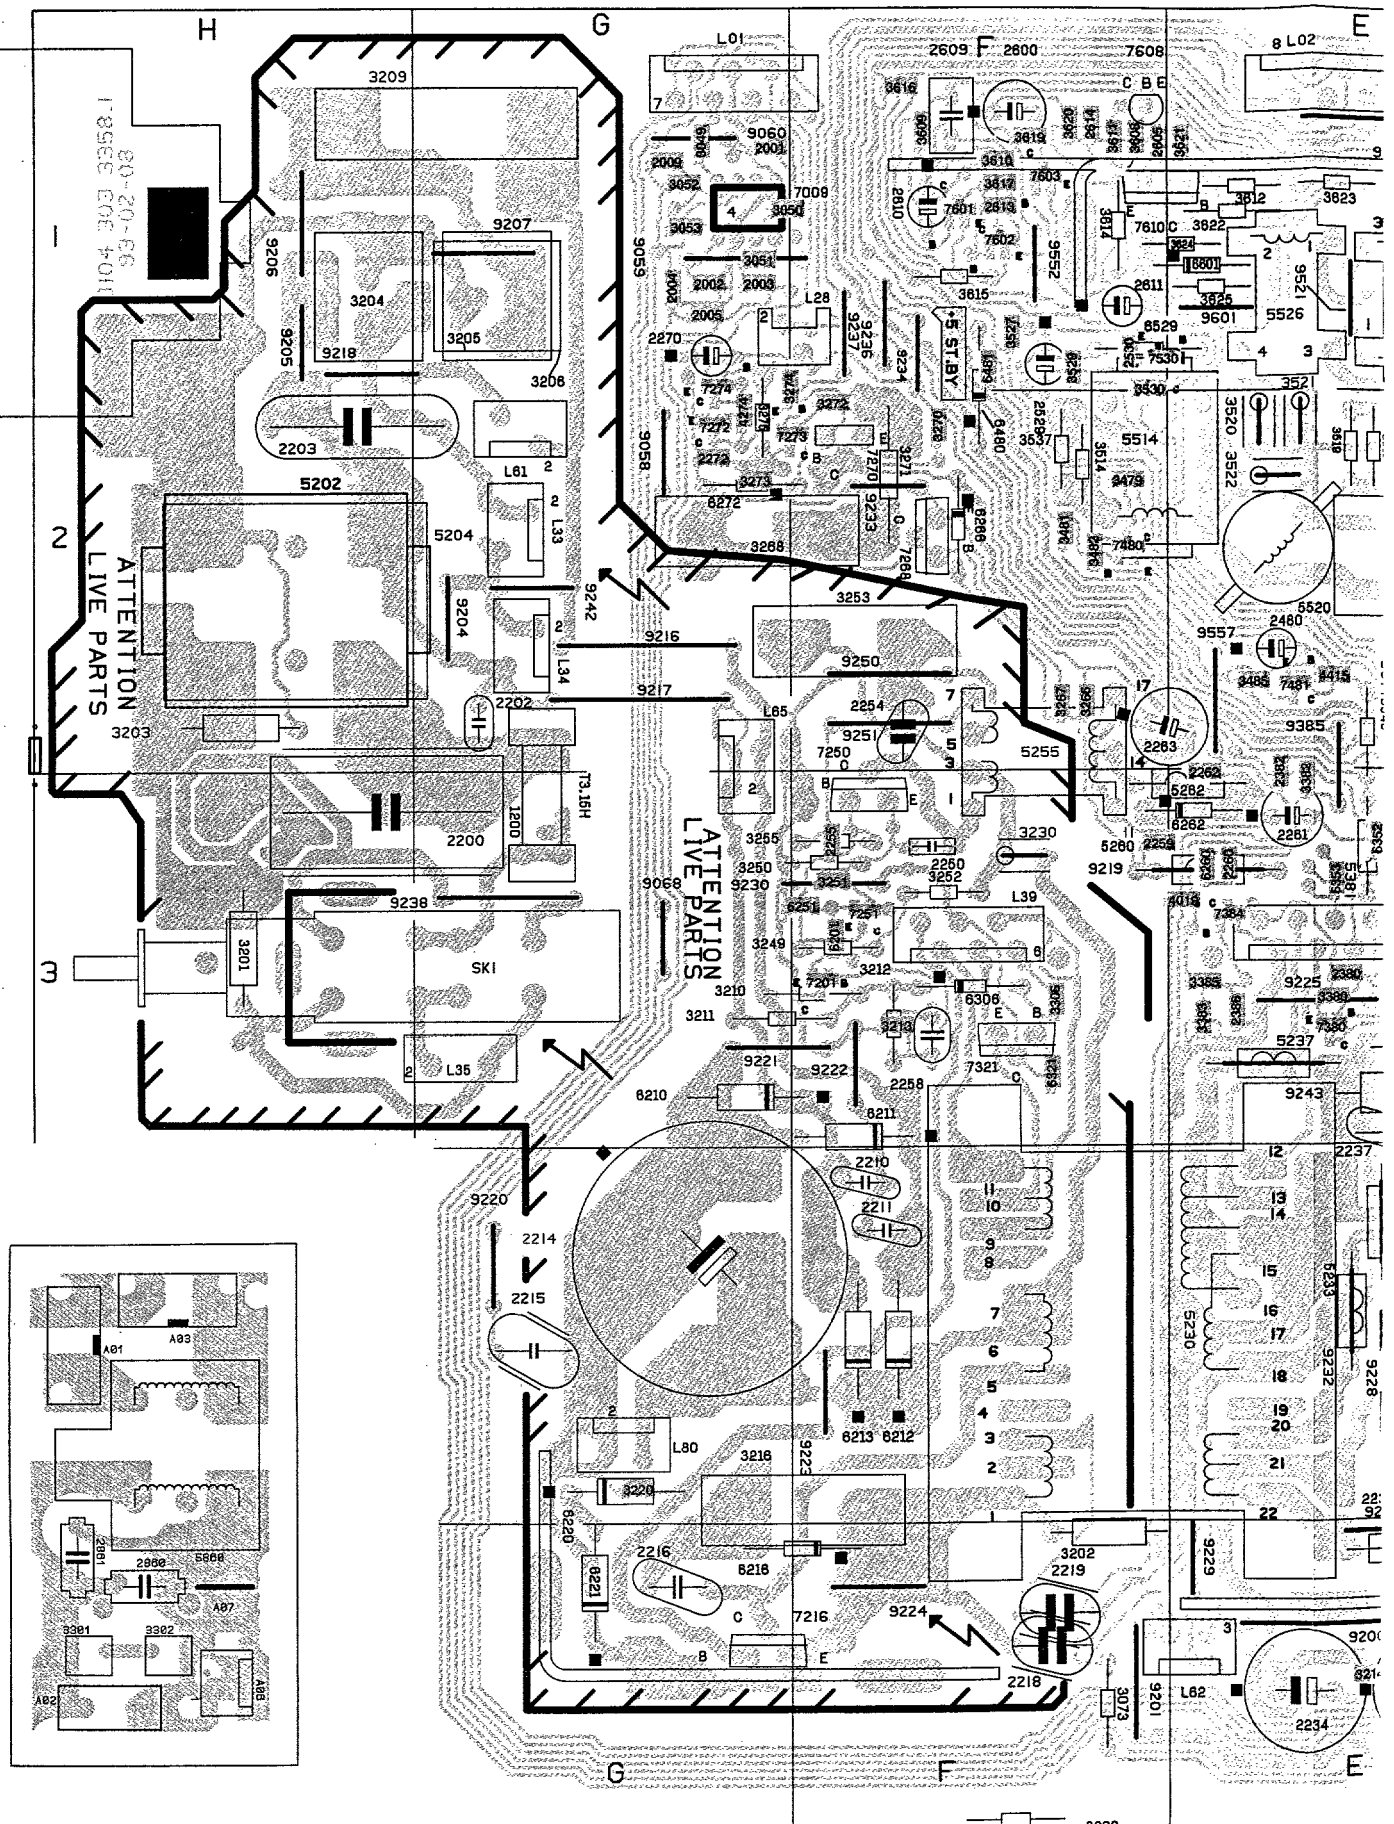

Platine forts signeaux FL X.16/.17 /

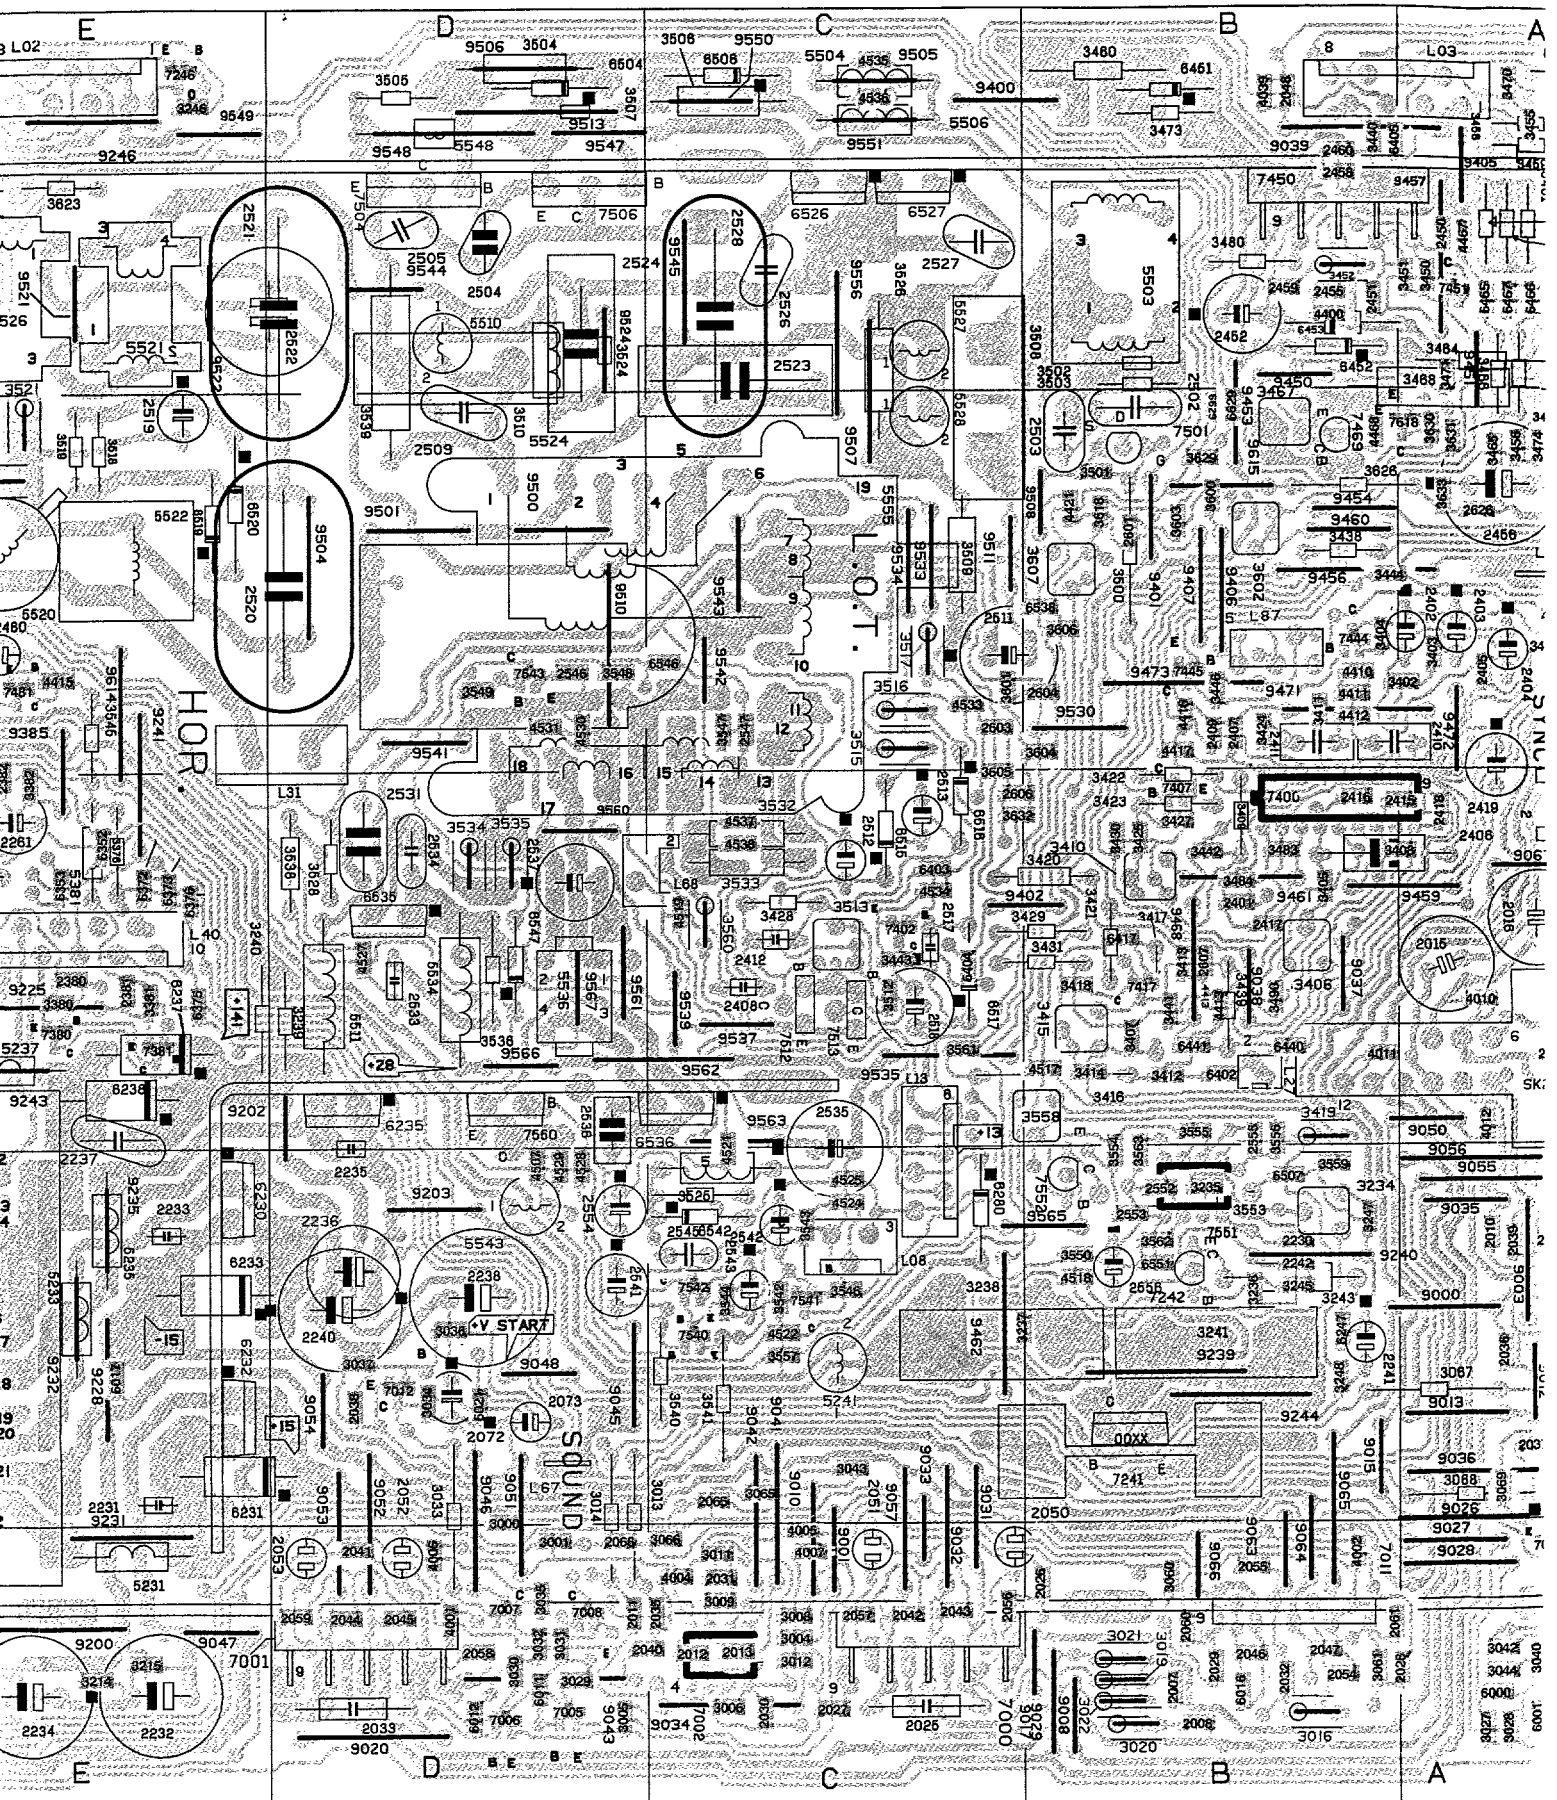

Platine forts signeaux FL X.16/.17 /

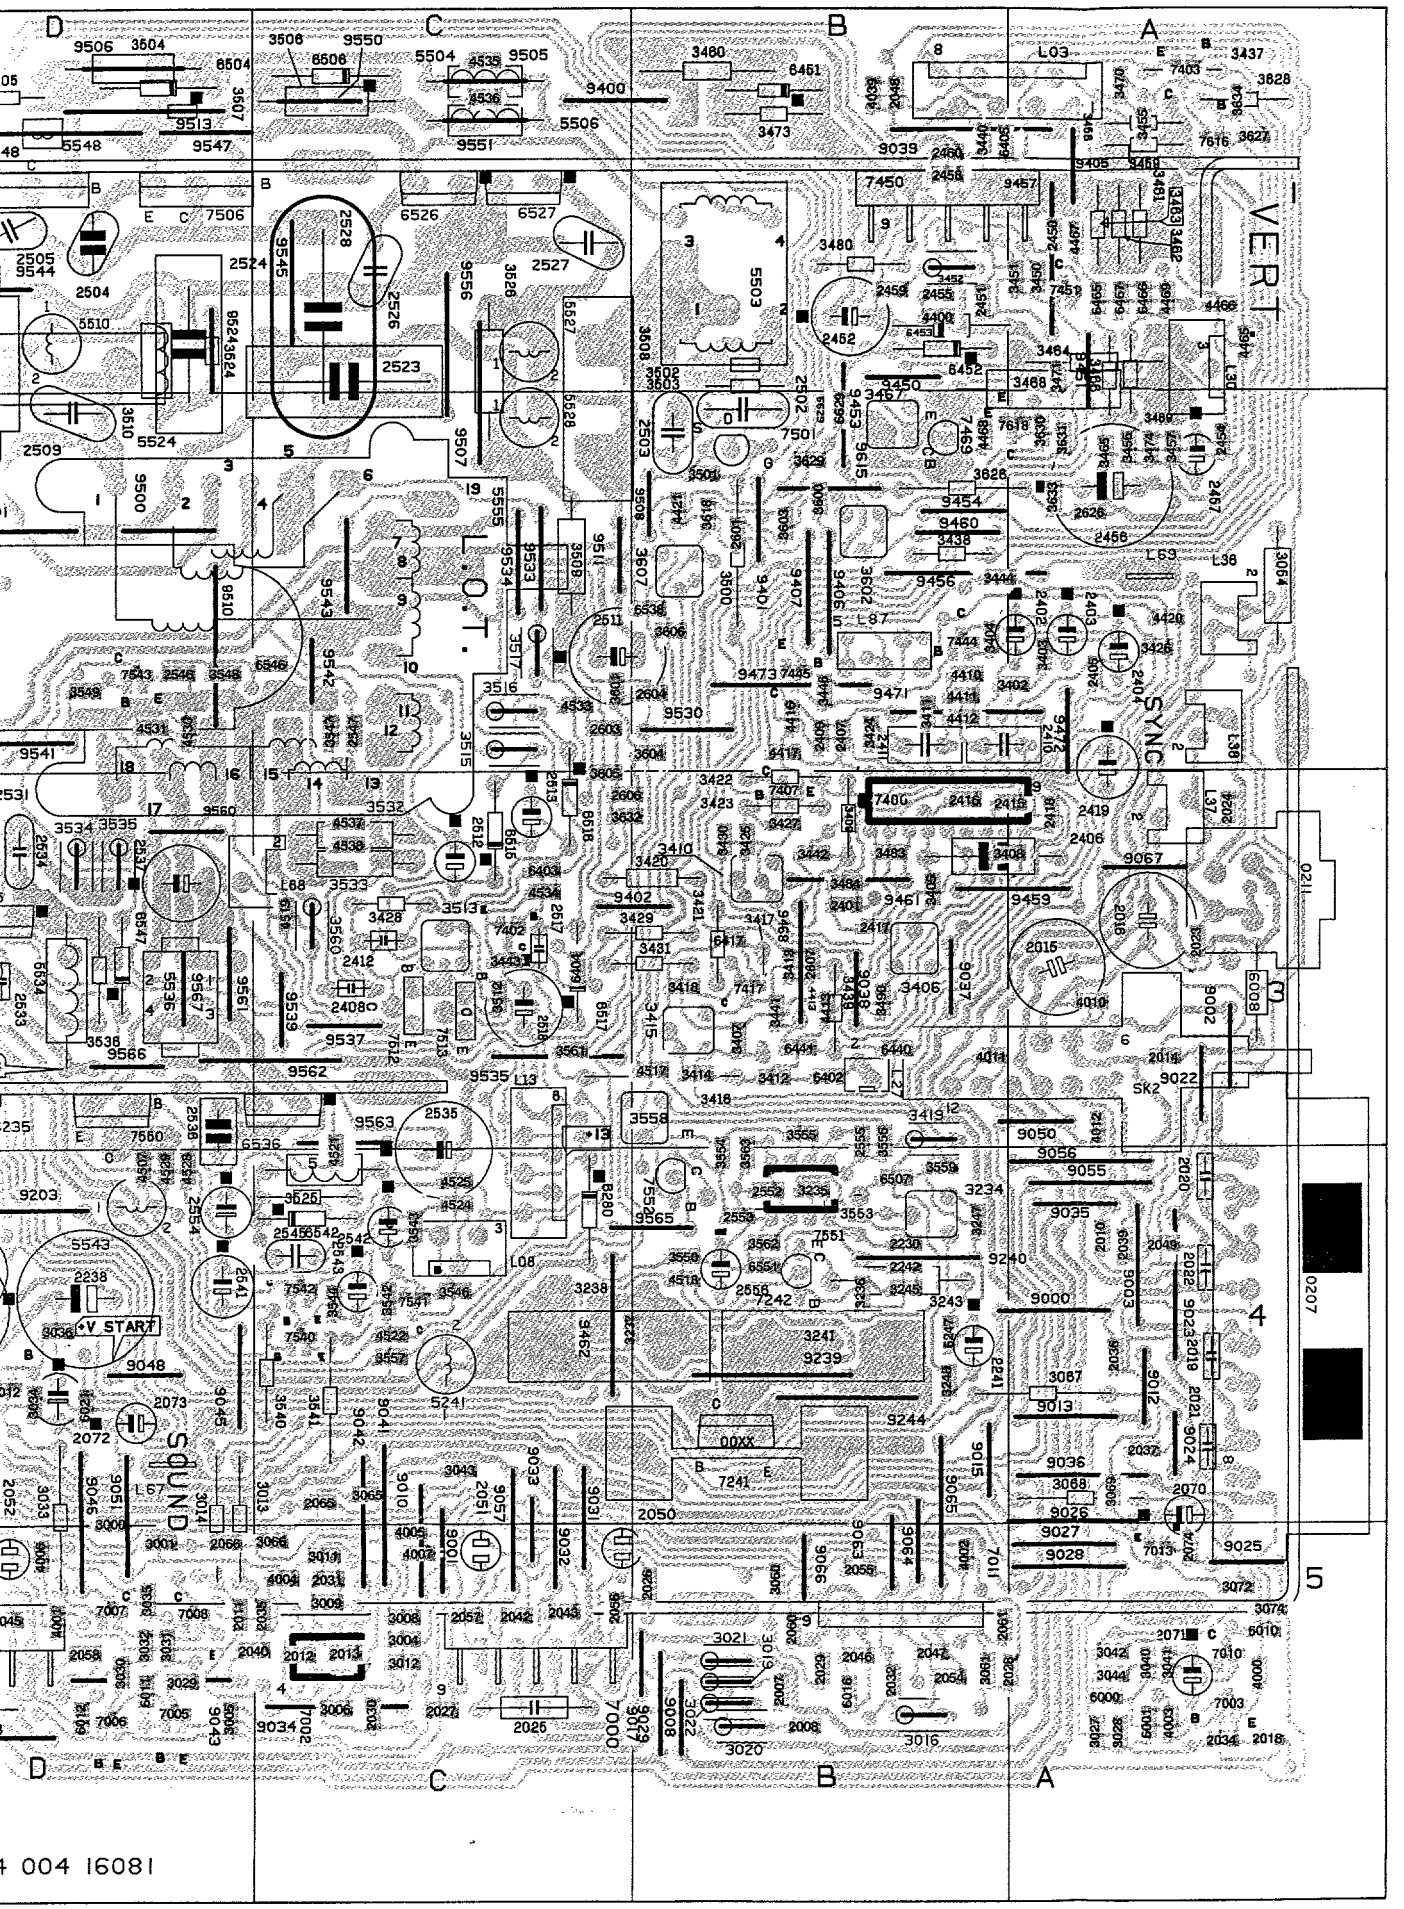

Y - C Detector / Y - C Detektor / Détecteur Y - C

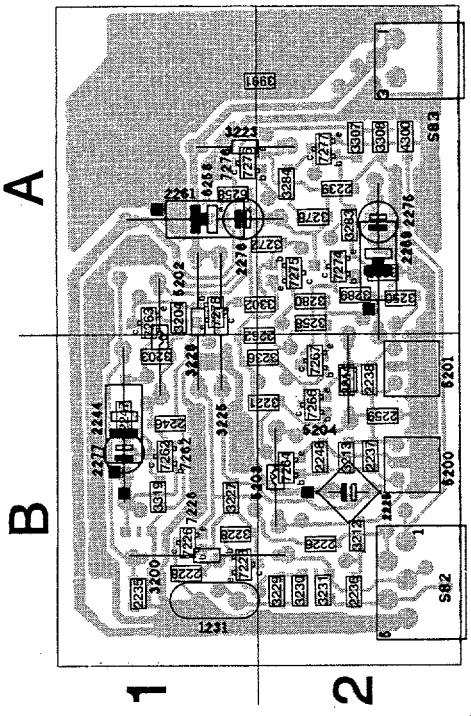

S82 B2	2239 A2	2276 A1	3221 B2	3250 A2
S83 A2	2244 B1	2277 B1	3223 A1	3258 B2
1231 B1	2246 B1	3190 A2	3225 A1	3272 A2
2225 B2	2247 B1	3200 B1	3226 A1	3278 A2
2226 B2	2248 B2	3201 A1	3227 B1	3280 A2
2228 B1	2259 B2	3203 B1	3228 B1	3282 A2
2235 B1	2261 A1	3204 A1	3229 B2	3283 A2
2236 B2	2262 B2	3212 B2	3230 B2	3284 A2
2237 B2	2269 A2	3213 B2	3231 B2	3289 A2
2238 B2	2275 A2	3214 B2	3236 B2	3302 A2

3307 A2	6258 A1	7276 A1
3308 A2	7226 B1	7277 A2
3319 B1	7228 B1	7278 A1
3991 A2	7262 B1	
4300 A2	7263 A1	
5200 B2	7264 B2	
5201 B2	7266 B2	
5202 B1	7267 B2	
5203 B2	7274 A2	
5204 B2	7275 A2	

- C

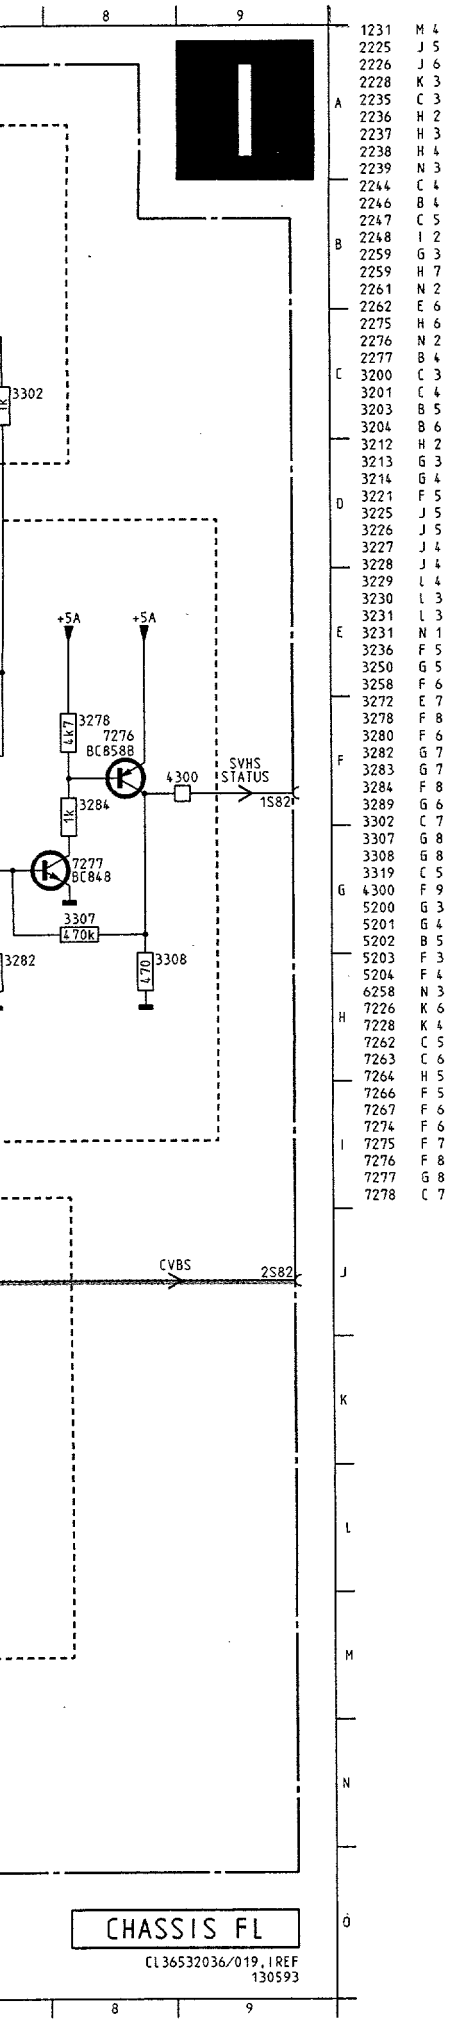

1231 M 4
2225 J 5
2226 J 6
2228 K 3
A 2235 C 3
2236 H 2
2237 H 3
2238 H 4
2239 N 3
2244 C 4
2246 B 4
2247 C 5
B 2248 I 2
2259 G 3
2259 H 7
2261 N 2
2262 E 6
2275 H 6
2276 N 2
2277 B 4
C 3200 C 3
3201 C 4
3203 B 5
3204 B 6
3212 H 2
3213 G 3
3214 G 4
D 3221 F 5
3225 J 5
3226 J 5
3227 J 4
3228 J 4
3229 L 4
3230 L 3
3231 L 3
E 3231 N 1
3236 F 5
3250 G 5
3258 F 6
3272 E 7
3278 F 8
3280 F 6
3282 G 7
F 3283 G 7
3284 F 8
3289 G 6
3302 C 7
3307 G 8
3308 G 8
3319 C 5
G 4300 F 9
5200 G 3
5201 G 4
5202 B 5
5203 F 3
5204 F 4
6258 N 3
H 7226 K 6
7228 K 4
7262 C 5
7263 C 6
7264 H 5
7266 F 5
7267 F 6
7274 F 6
I 7275 F 7
7276 F 8
7277 G 8
7278 C 7

SCAVEM

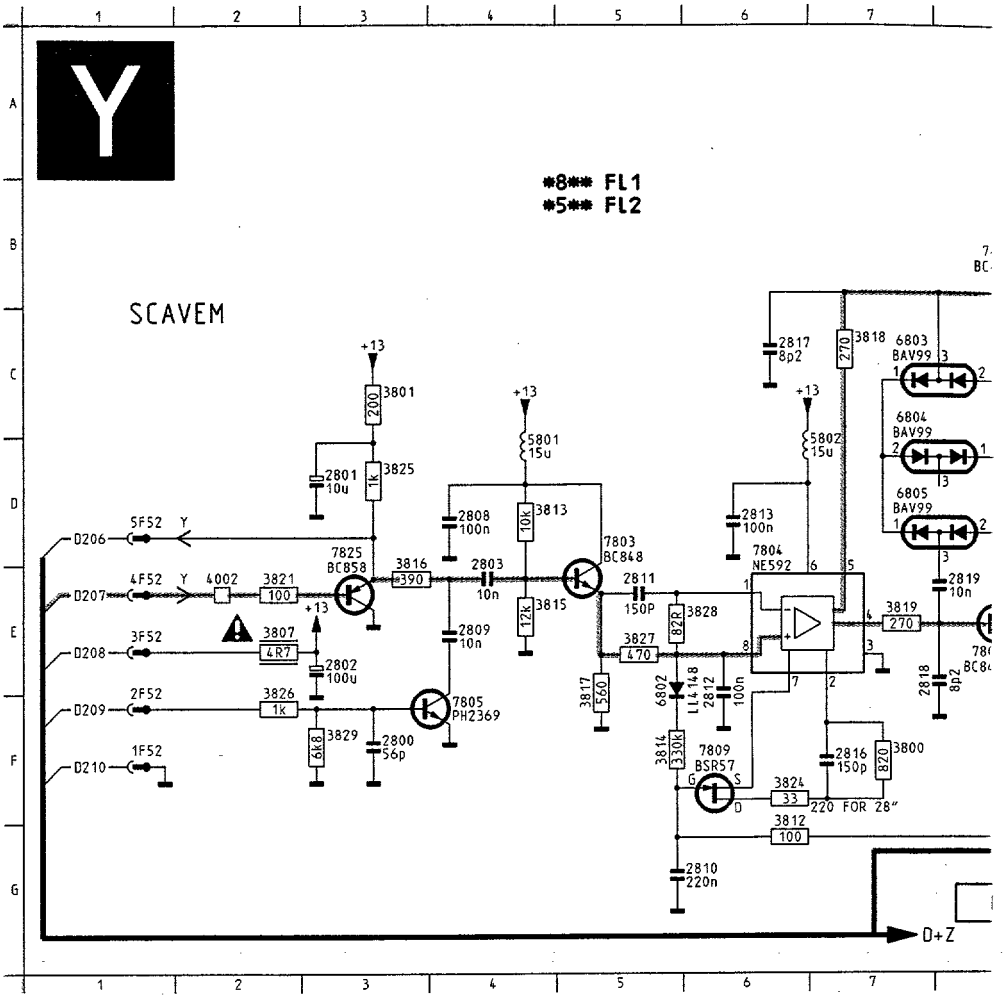

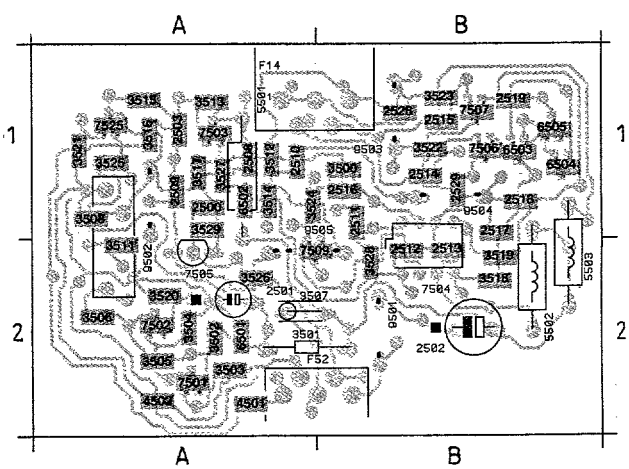

F14 B1 2509 A1 2517 B1 3503 A2 3513 A1
F52 A2 2510 A1 2518 B1 3504 A2 3514 A1
1501 A1 2511 B1 2519 B1 3505 A2 3515 A1
2500 A1 2512 B2 2528 B1 3506 A2 3516 A1
2501 A2 2513 B2 2529 B1 3507 A2 3517 A1
2502 B2 2514 B1 3500 B1 3508 A1 3518 B2
2503 A1 2515 B1 3501 A2 3511 A1 3519 B2
2508 A1 2516 B1 3502 A2 3512 A1 3520 A2

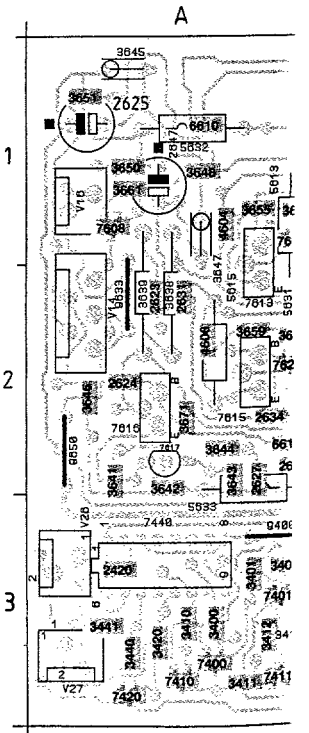

V2 B3 2630 B1 3424 B3 3638 A2 3671 A2 7410 A3 7620 B2
V14 A2 2631 A2 3425 B3 3639 A2 4600 B2 7411 A3 7621 A2
V15 B2 2632 B1 3426 B3 3641 A2 4603 B1 7420 A3 9400 A3
V16 A1 2633 B1 3430 B3 3642 A2 4604 A1 7421 B3 9401 B3
V26 A3 2634 A2 3431 B3 3643 A2 4605 B2 7423 B3 9615 B1
V27 A3 2635 A2 3432 B3 3644 A2 4606 A2 7425 B3 9633 A2
V90 B2 2636 B1 3433 B3 3645 A1 4612 A2 7430 B3 9640 B2
2420 A3 2637 A2 3434 B3 3646 A2 5612 B1 7431 B3 9650 A2
2490 B3 2647 A1 3435 B3 3647 A1 5613 A1 7433 B3 9651 B1
2491 B3 2671 B2 3440 A3 3648 A1 5614 B2 7435 B3
2604 B2 2672 B2 3441 A3 3650 A1 5615 A2 7440 A3
2605 B1 3400 A3 3490 B3 3651 A1 5630 B2 7608 A1
2606 B2 3401 A3 3491 B3 3652 B1 5631 B2 7610 B1
2607 B2 3402 A3 3609 B2 3653 B1 5632 A1 7611 B1
2620 B1 3410 A3 3610 B2 3654 A1 5633 A2 7612 B2
2621 B1 3411 A3 3630 B1 3655 A1 6426 B3 7613 A2
2622 B2 3412 A3 3631 B1 3656 B2 6427 B3 7614 B2
2623 A2 3413 A3 3633 B1 3657 B2 6490 B3 7615 A2
2624 A2 3420 A3 3634 B1 3658 A2 6610 A1 7616 A2
2625 A1 3421 A3 3635 B1 3659 A2 6616 A2 7617 A2
2626 B1 3422 A3 3636 B1 3661 A1 7400 A3 7618 B1
2627 A2 3423 B3 3637 B2 3670 B1 7401 A3 7619 A1

SCAVEM

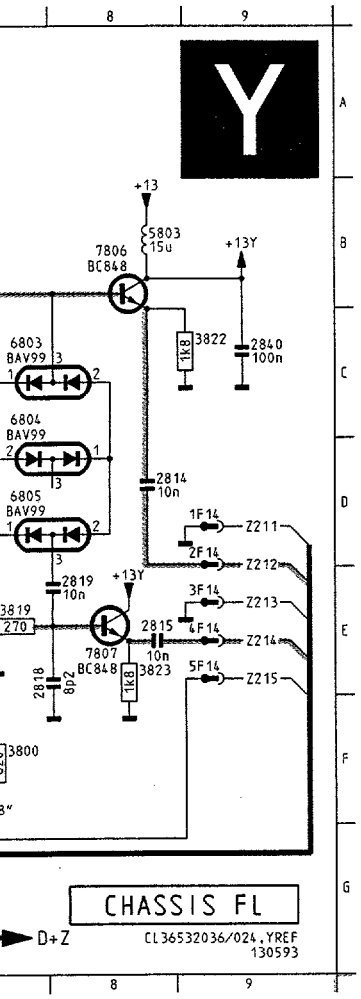

2800	F 3										
2801	D 3										
2802	E 3										
2803	E 4										
2808	D 4										
2809	E 4										
2810	G 5										
2811	E 5										
2812	E 6										
2813	D 6										
2814	D 8										
2815	E 8										
2816	F 7										
2817	C 6										
2818	E 7										
2819	E 8										
2840	C 9										
3800	F 7										
3801	C 3										
3807	E 2										
3812	G 6										
3813	D 4										
3814	F 5										
3815	E 4										
3816	E 3										
3817	E 5										
3818	C 7										
3819	E 7										
3821	E 2										
3822	C 9										
3823	E 8										
3824	F 6										
3825	D 3										
3826	F 2										
3827	E 5										
3828	E 5										
3829	F 3										
4002	E 2										
5801	D 4										
5802	D 6										
5803	B 8										
6802	E 5										
6803	C 7										
6804	C 7										
6805	D 7										
7803	D 5										
7804	D 6										
7805	F 4										
7806	B 8										
7807	E 8										
7809	F 6										
7825	D 3										

A2	3513	A1	3521	A1	7507	B1	4501	A2	6504	B1	
A2	3514	A1	3522	B1	7509	B2	4502	A2	6505	B1	
A2	3515	A1	3523	B1	7525	A1	5501	A1	7501	A2	
A2	3516	A1	3524	A1	9501	B2	5502	B2	7502	A2	
A2	3517	A1	3525	A1	9502	A1	5503	B2	7503	A1	
A1	3518	B2	3526	A2	9503	B1	6501	A2	7504	B2	
A1	3519	B2	3527	A1	9504	B1	6502	A1	7505	A2	
A1	3520	A2	3528	B2	9505	A2	6503	B1	7506	B1	
			3529	A1							

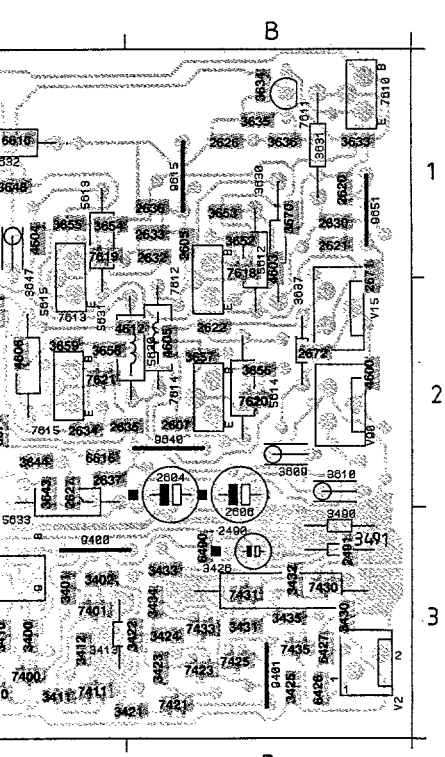

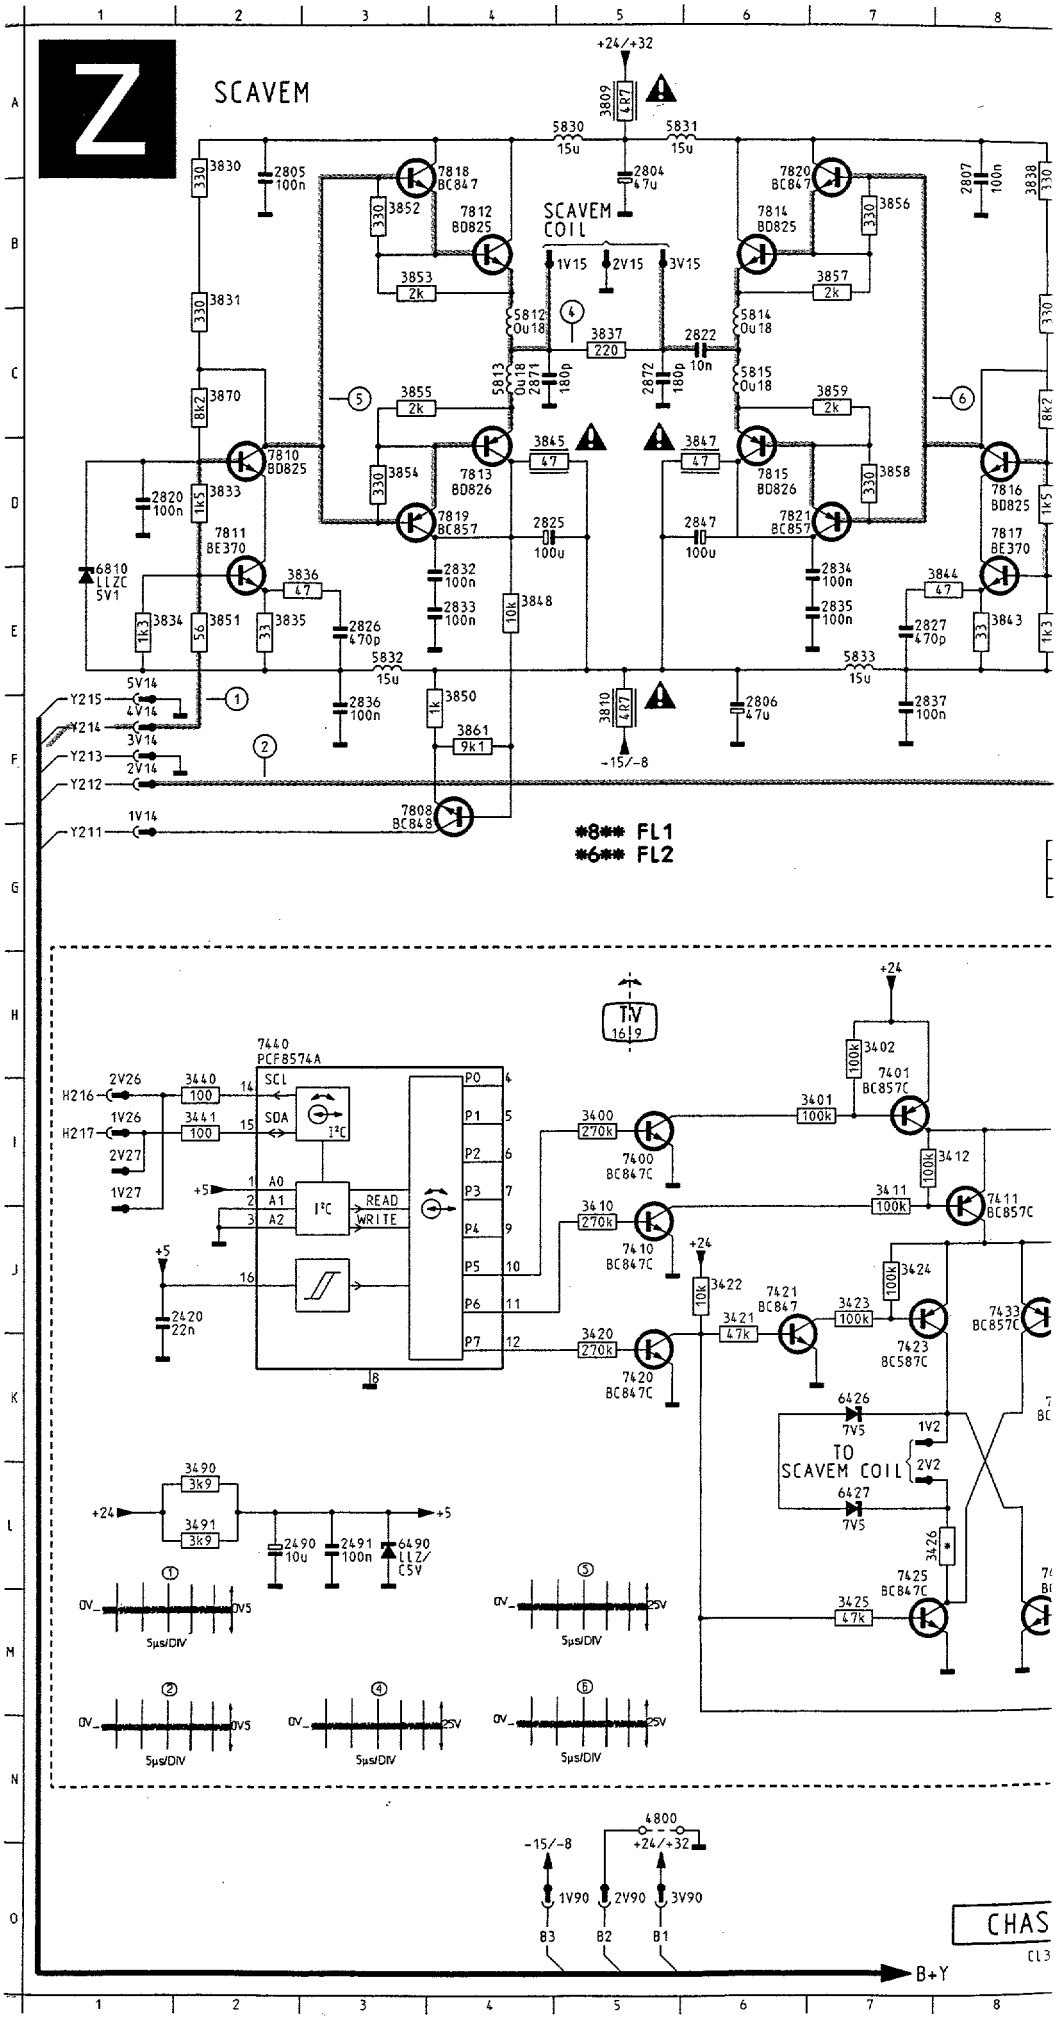

SCAVEM

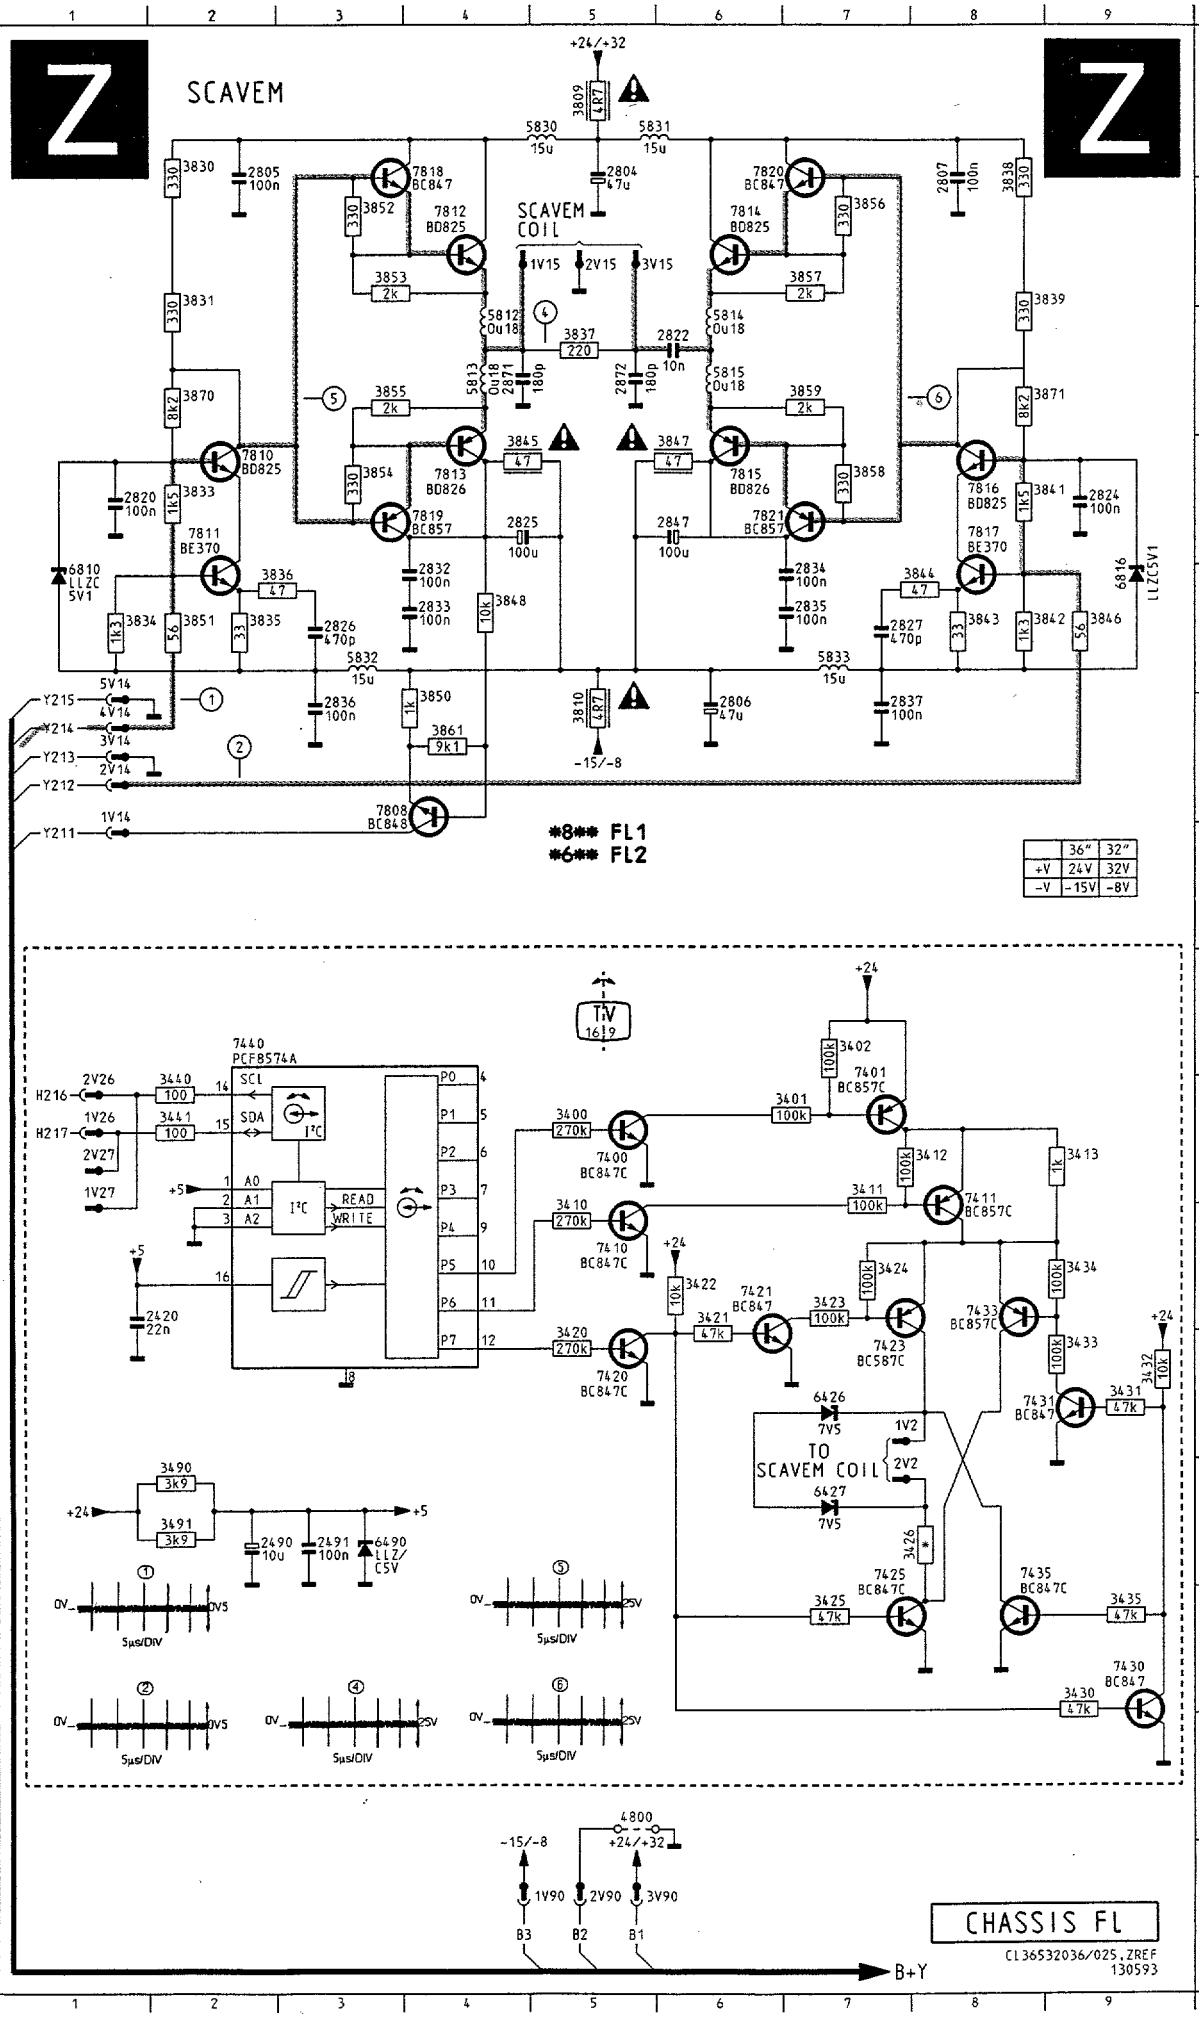

2420 J 1 7820 B 5
2490 L 2 7821 D 4
2491 L 3
2804 B 5
2805 B 2
2806 F 6
2807 B 8
2820 D 1
2822 C 6
2824 D 9
2825 D 4
2826 E 3
2827 E 7
2832 E 4
2833 E 4
2834 E 7
2835 E 7
2836 F 3
2837 F 7
2847 D 6
2871 C 4
2872 C 5
3400 I 5
3401 I 6
3402 H 7
3410 J 5
3411 I 7
3412 I 7
3413 I 9
3420 K 5
3421 J 6
3422 J 6
3423 J 7
3424 J 7
3425 M 7
3426 L 7
3430 M 9
3431 K 9
3432 K 9
3433 K 9
3434 J 9
3435 M 9
3440 I 1
3441 I 1
3490 L 2
3491 L 2
3809 A 5
3810 F 5
3830 A 2
3831 B 2
3833 D 2
3834 E 1
3835 E 2
3836 E 3
3837 C 5
3838 B 8
3839 B 8
3841 D 8
3842 E 8
3843 E 8
3844 E 8
3845 D 4
3846 E 9
3847 D 6
3848 E 4
3850 E 4
3851 E 2
3852 B 3
3853 B 3
3854 D 3
3855 C 3
3856 B 7
3857 B 7
3858 D 7
3859 C 7
3861 F 4
3870 C 2
3871 C 8
4800 N 5
5812 C 4
5813 C 4
5814 C 6
5815 C 6
5830 A 5
5831 A 5
5832 E 3
5833 E 7
6426 K 7
6427 L 7
6490 L 3
6810 E 1
6816 E 9
7400 I 5
7401 I 7
7410 J 5
7411 J 8
7420 K 5
7421 J 6
7423 K 7
7425 L 7
7430 M 9
7431 K 9
7433 J 8
7435 L 8
7440 H 2
7808 F 4
7810 D 2
7811 D 2
7812 B 4
7813 D 4
7814 B 6
7815 D 6
7816 D 8
7817 D 8
7818 B 4
7819 D 4

800 F 3
801 D 3
802 E 3
803 E 4
808 D 4
809 E 4
810 G 5
811 E 5
812 E 6
813 D 6
814 D 8
815 E 8
816 F 7
817 C 6
818 E 7
819 E 8
840 C 9
800 F 7
801 C 3
807 E 2
812 G 6
813 D 4
814 F 5
815 E 4
816 E 3
817 E 5
818 C 7
819 E 7
821 E 2
822 C 9
823 E 8
824 F 6
825 D 3
826 F 2
827 E 5
828 E 5
829 F 3
002 E 2
801 D 4
802 D 6
803 B 8
802 E 5
803 C 7
804 C 7
805 D 7
803 D 5
804 D 6
805 F 4
806 B 8
807 E 8
809 F 6
825 D 3

6504 B1
6505 B1
7501 A2
7502 A2
7503 A1
7504 B2
7505 A2
7506 B1

L01	F1	2203	H2	2529	F1	3235	F3	3439	B2	3573	D1	5505	C1	6611	B2	7381	E3	9018	F5	9206	H1	9460	B2
L02	E1	2210	F4	2530	F1	3238	D3	3440	B3	3601	B2	5506	C1	6633	B2	7384	E3	9019	E3	9207	G1	9462	C4
L03	A1	2211	F4	2531	D3	3239	D3	3441	B3	3602	B2	5507	D1	6801	B3	7400	B3	9020	D5	9218	H1	9463	B3
L06	C2	2214	G4	2533	D3	3240	E3	3442	B3	3603	B2	5510	D1	6802	B4	7402	C3	9022	A3	9219	E3	9464	B4
L13	C4	2215	G4	2534	D3	3241	B4	3443	A2	3604	B2	5511	D3	6803	B4	7417	B3	9023	A4	9220	G4	9471	B2
L30	A1	2216	G5	2535	C4	3242	B4	3444	B2	3605	C2	5514	F2	6804	B3	7443	A2	9024	A4	9221	G3	9472	A2
L32	E2	2218	F5	2536	C4	3243	B4	3448	A2	3606	B2	5520	E2	7000	C5	7444	A2	9026	A4	9222	F3	9500	D2
L33	G2	2219	F5	2537	D4	3244	B4	3450	B1	3607	B2	5521	E1	7001	D5	7450	A1	9027	A5	9223	F4	9501	D2
L34	G2	2231	E4	2541	C4	3245	B4	3451	B1	3608	F1	5524	D1	7002	C5	7451	A1	9028	A5	9224	F5	9502	D2
L35	G3	2232	E5	2542	C4	3246	E1	3452	B1	3609	F1	5525	D3	7003	A5	7469	B2	9029	B5	9225	E3	9503	D2
L36	A2	2233	E4	2543	C4	3247	B4	3453	A1	3610	F1	5526	E1	7005	D5	7480	F2	9031	C4	9228	E4	9504	D2
L37	A3	2234	E5	2544	C3	3248	B4	3455	A1	3611	F1	5527	C1	7006	D5	7481	E2	9032	C5	9229	E5	9507	C1
L38	A2	2235	D3	2545	C3	3249	F3	3456	A2	3612	E1	5534	D3	7007	D5	7501	B2	9033	C4	9230	F3	9508	B2
L39	F3	2237	E3	2546	D2	3250	F3	3457	A2	3613	B2	5543	D4	7008	D5	7506	D1	9034	C5	9231	E5	9511	C2
L40	E3	2238	D4	2547	C2	3251	F3	3458	A1	3614	E1	5555	D3	7009	G1	7512	C3	9035	A4	9232	E4	9520	E2
L61	G2	2239	B4	2548	D2	3252	F3	3459	A1	3615	F1	6000	A5	7010	A5	7513	C3	9036	A4	9233	F2	9521	D1
L65	G2	2240	D4	2551	C4	3253	F2	3460	B1	3616	F1	6001	A5	7011	B5	7530	F1	9041	C4	9234	F1	9522	E2
L70	A2	2250	F3	2560	D4	3255	F3	3461	A1	3617	F1	6008	A3	7012	D4	7540	C4	9042	C4	9235	E4	9529	D3
L71	B2	2254	F2	2600	F1	3266	F2	3462	A1	3618	B2	6010	A5	7013	A5	7541	C4	9043	D5	9238	G3	9530	B2
L80	G4	2255	F3	2601	B2	3267	F2	3463	A1	3619	F1	6011	D5	7201	F3	7542	C4	9045	D4	9239	E3	9533	C2
L90	C3	2258	F3	2603	C2	3268	G2	3464	A2	3620	F1	6012	D5	7216	G5	7543	D2	9046	D4	9240	B4	9534	C2
SK1	G3	2259	F3	2605	F1	3270	F2	3465	A2	3621	F1	6016	B5	7241	B4	7550	D3	9047	E5	9241	E3	9535	C3
SK2	B3	2260	E3	2606	C3	3271	F2	3467	B1	3622	E1	6017	D4	7241	C4	7551	D4	9048	D4	9242	G2	9537	C3
0211	A3	2261	E3	2607	B3	3272	F2	3468	A2	3623	E1	6021	D4	7242	B4	7552	C4	9050	A4	9243	E3	9538	D3
039	H5	2262	E3	2609	F1	3273	G2	3473	B1	3625	A2	6201	F3	7243	B4	7601	F1	9051	D4	9246	E1	9539	D3
040	H4	2263	E2	2610	F1	3274	F1	3479	F2	3626	A1	6210	G3	7246	E1	7602	F1	9052	D5	9247	F1	9540	D4
1200	G3	2270	G1	2611	F1	3275	G2	3480	B1	3627	B4	6211	F3	7250	F3	7603	F1	9053	D5	9250	F2	9541	D2
2001	G1	2272	G2	2612	E1	3298	F5	3481	F2	3628	A1	6212	F4	7251	F3	7608	F1	9054	D4	9251	F2	9542	C2
2002	G1	2302	H5	2613	F1	3299	F5	3482	F2	3629	B2	6213	F4	7268	F2	7610	E1	9055	A4	9300	H5	9543	C2
2003	G1	2303	H5	2614	F1	3300	H5	3484	B3	3630	F1	6216	F5	7270	F2	7616	A1	9056	A3	9302	H4	9544	D1
2004	G1	2308	H5	2615	F1	3304	H5	3485	E2	3631	B2	6220	G4	7272	G1	7618	B2	9057	C5	9385	E2	9545	C1
2005	G1	2321	H5	2633	B2	3305	H5	3500	B2	3632	B3	6221	G5	7273	F2	7800	B4	9058	G2	9400	D3	9547	D1
2007	B5	2330	B4	2801	B4	3306	F3	3501	C2	3633	B2	6230	E4	7274	F1	7801	B3	9059	G1	9437	B3	9549	E1
2008	B5	2331	H4	2805	B4	3308	H5	3502	B1	3634	A1	6232	E4	7305	H5	7802	B4	9060	G1	9438	B3	9550	D4
2009	G1	2351	H4	2806	B4	3309	H5	3503	B2	3653	B2	6235	D3	7311	H5	9000	A4	9063	B5	9439	B3	9552	F1
2010	A4	2360	H4	3000	D5	3310	H5	3504	D1	3800	B4	6237	E3	7312	H5	9001	C5	9064	B5	9450	A1	9557	E2
2011	D5	2361	H4	3001	D5	3311	H5	3505	C3	3801	B4	6238	E3	7318	H5	9003	A4	9065	B4	9451	A2	9614	E2
2012	C5	2365	H4	3004	C5	3312	H5	3506	C1	3802	B4	6246	B4	7320	H4	9008	B5	9066	B5	9452	B2	9615	B2
2013	C5	2372	H4	3005	D5	3313	H5	3507	D1	3803	B4	6251	F3	7360	H4	9010	C5	9067	A3	9453	A1	9625	A2
2014	A3	2374	H4	3006	C5	3314	H5	3508	C2	3804	B4	6260	E3	7369	H4	9012	A4	9202	D3	9454	C3	9626	A2
2015	A3	2376	H4	3008	C5	3317	H5	3509	C2	3805	B4	6262	E3	7370	H4	9013	A4	9203	D4	9455	B2	9801	B4
2016	A3	2380	E3	3009	C5	3320	H5	3510	D1	3806	B4	6266	F2	7371	H4	9015	B4	9204	G2	9457	A1	9802	B4
2018	A5	2381	E3	3011	C5	3321	H5	3511	D3	3807	C3	6272	G2	7380	E3	9017	B5	9205	H1	9459	B3	9803	B3
2019	A4	2382	E3	3012	C5	3322	H5	3512	C3	3809	B4	6280	C4										
2020	A4	2386	E3	3013	D4	3331	H4	3513	C3	3810	B3	6302	H5										
2021	A4	2401	B3	3014	D4	3332	H4	3514	F2	3811	B4	6303	H5										
2022	A4	2402	B2	3016	B5	3350	H4	3515	C3	4000	A5	6304	H5										
2023	A3	2403	B2	3019	B5	3351	H4	3516	C3	4001	D5	6305	H5										
2024	A3	2404	A2	3020	B5	3356	H4	3517	C3	4002	A3	6306	F3										
2025	C5	2405	A2	3021	B5	3357	H4	3518	D2	4003	A5	6308	H5										
2026	B5	2406	B3	3022	B5	3358	H4	3519	E2	4004	C5	6312	H5										
2027	C5	2407	B2	3027	A5	3359	H4	3520	E2	4005	C5	6314	H5										
2028	B5	2408	C3	3028	A5	3360	H4	3521	E2	4006	D5	6315	H5										
2029	B5	2409	B2	3029	D5	3362	H4	3522	C1	4007	C5	6318	H5										
2030	C5	2410	B2	3030	D5	3364	H4	3523	D1	4010	A3	6319	H5										
2031	C5	2411	B2	3031	D5	3365	H4	3524	D1	4011	B3	6331	H4										
2032	B5	2412	C3	3032	D5	3366	H4	3525	E2	4012	A3	6349	H4										
2033	D5	2413	C3	3033	D4	3368	H4	3526	B2	4061	B5	6350	H4										
2034	A5	2415	A3	3034	D4	3370	H4	3527	F1	4074	A5	6351	H4										
2035	C5	2416	B3	3035	D5	3371	H4	3528	D3	4268	F2	6352	E3										
2036	A4	2417	B3	3036	D4	3372	H4	3529	F1	4274	F1	6353	E3										
2037	A4	2418	A3	3037	D4	3373	H4	3530	F1	4401	B4	6355	H4										
2038	D4	2419	A3	3040	A5	3374	H4	3531	B3	4402	C4	6356	H4										
2039	A4	2450	A1	3041	A5	3375	H4	3532	C3	4403	B2	6357	H4										
2040	D5	2451	A1	3043	C4	3376	E3	3533	C3	4404	B3	6370	H4										
2041	D5	2452	B1	3044	A5	3378	H4	3534	D3	4405	A1	6371	H4										
2042	C5	2453	A1	3049	G1	3380	E3	3535	D3	4406	B2	6372	E3										
2043	C5	2455	B1	3050	G1	3381	E3	3536	D3	4407	B2	6373	E3										
2044	D5	2456	A2	3051	G1	3382	E3	3537	F2	4408	B4	6375	E3										
2045	D5	2457	A2	3052	G1	3383	E3	3538	D3	4409	B4	6376	E3										
2046	B5	2458	B1	3053	G1	3387	E3	3539	C3	4461	B2	6403	C3										
2047	B5	2459	B1	3054	A2	3402	B2	3540	C4	4508	B2	6404	C3										
2049	A4	2460	B1	3060	B5	3403	B2	3541	C4	4511	F1	6417	B3										
2050	C5	2480	E2	3061	B5	3404	A2	3542	C4	4512	D4	6422	B2										
2051	C5	2501	B2	3065	C4	3405	B3	3543	C4	4530	D2	6440	B2										
2052	D5	2502	B2	3066	C5	3406	B3	3544	C4	4531	D2	6441	B3										
2053	D5	2503	B2	3067	A4	3407	B3	3545	E2	4533	D3	6451	B1										
2054	B5	2504	C1	3068	A4	3408	B3	3546	C4	4601	F1	6452	B2										
2055	B5	2507	D1	3069	A4	3409	B2	3547	C2	4802	B4	6480	F1										
2056	C5	2509	D2	3072	A4	3410	B3	3548	D2	4803	B3	6506	D1										
2057	C5	2510	D2	3073	A5	3411	B2	3549	D2	4804	B3	6515	C2										
2058	D5	2511	B2	3074	A5	3413	B3	3550	C4	5202	H2	6516	C3										
2059	D5	2512	C3	3201	H3	3414	B3	3551	C4	5204	H2	6517	C3										
2060	B5	2513	C3	3202	F5	3415	B3	3552	E2	5230	F4	6519	E2										
2061	B5	2517	C3	3203	H2	3417	B3	3553	E2	5231	E5	6520	E2										
2065	C4	2518	C3	3204	H1	3418	B3	3555	D1	5233	E4	6526	C1										
2066	D5	2519	E2	3205	G1	3419	B4	3556	C1	5235	E4	6527	C1										
207	A4	2520	E2	3209	G1	3421	B3	3558	C2	5237	E3	6529	F1										
2070	A5	2521	D1	3210	F3	3422	B2	3559	B2	5241	C4	6534	D3										
2071	A5	2522	D2	3211	G3	3424	B2	3560	C4	5255	F3	6536	C3										
2072	D4	2523	C1	3212	F3	3426	A2	3561	C4	5260	E3	6542	C3										
2073	D4	2524	D1	3213	F3	3428	C3	3562	D4	5308	H5	6546	C2										
2074	A5	2525	E2	3214	E5	3429	B3	3563	C4	5310	H5	6547	D3										
2200	H3	2526	E2	3215	E5	3430	B2	3564	D3	5381	E3	6551	C4										
2202	G2	2527	D1	3216	F4	3438	C3	3570	C4	5503	B1	6570	C4										

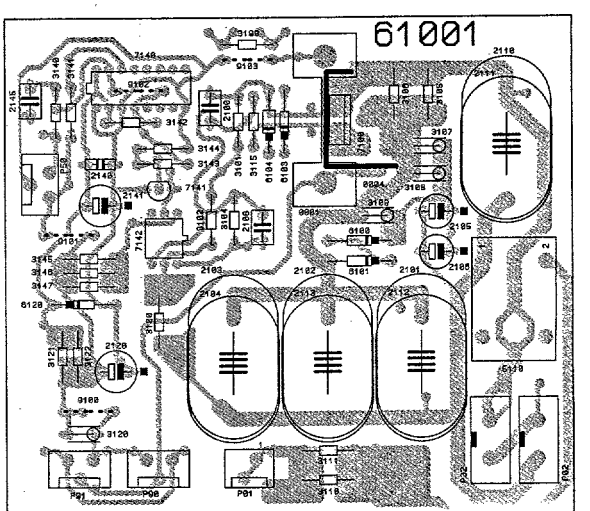

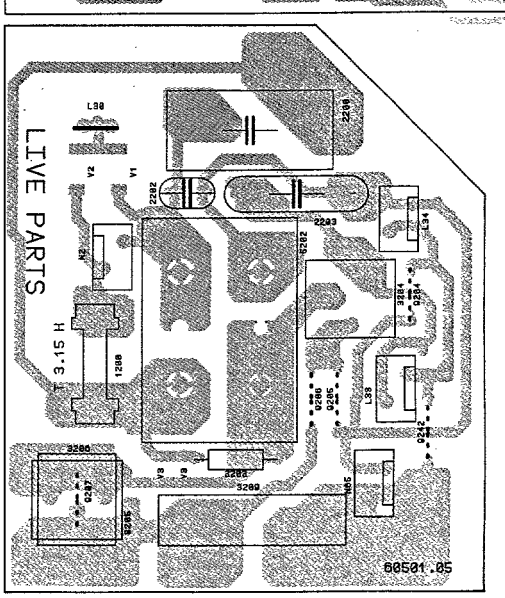

Large signal panel FL X.14 / Groß-signal Platte FL X.14 /

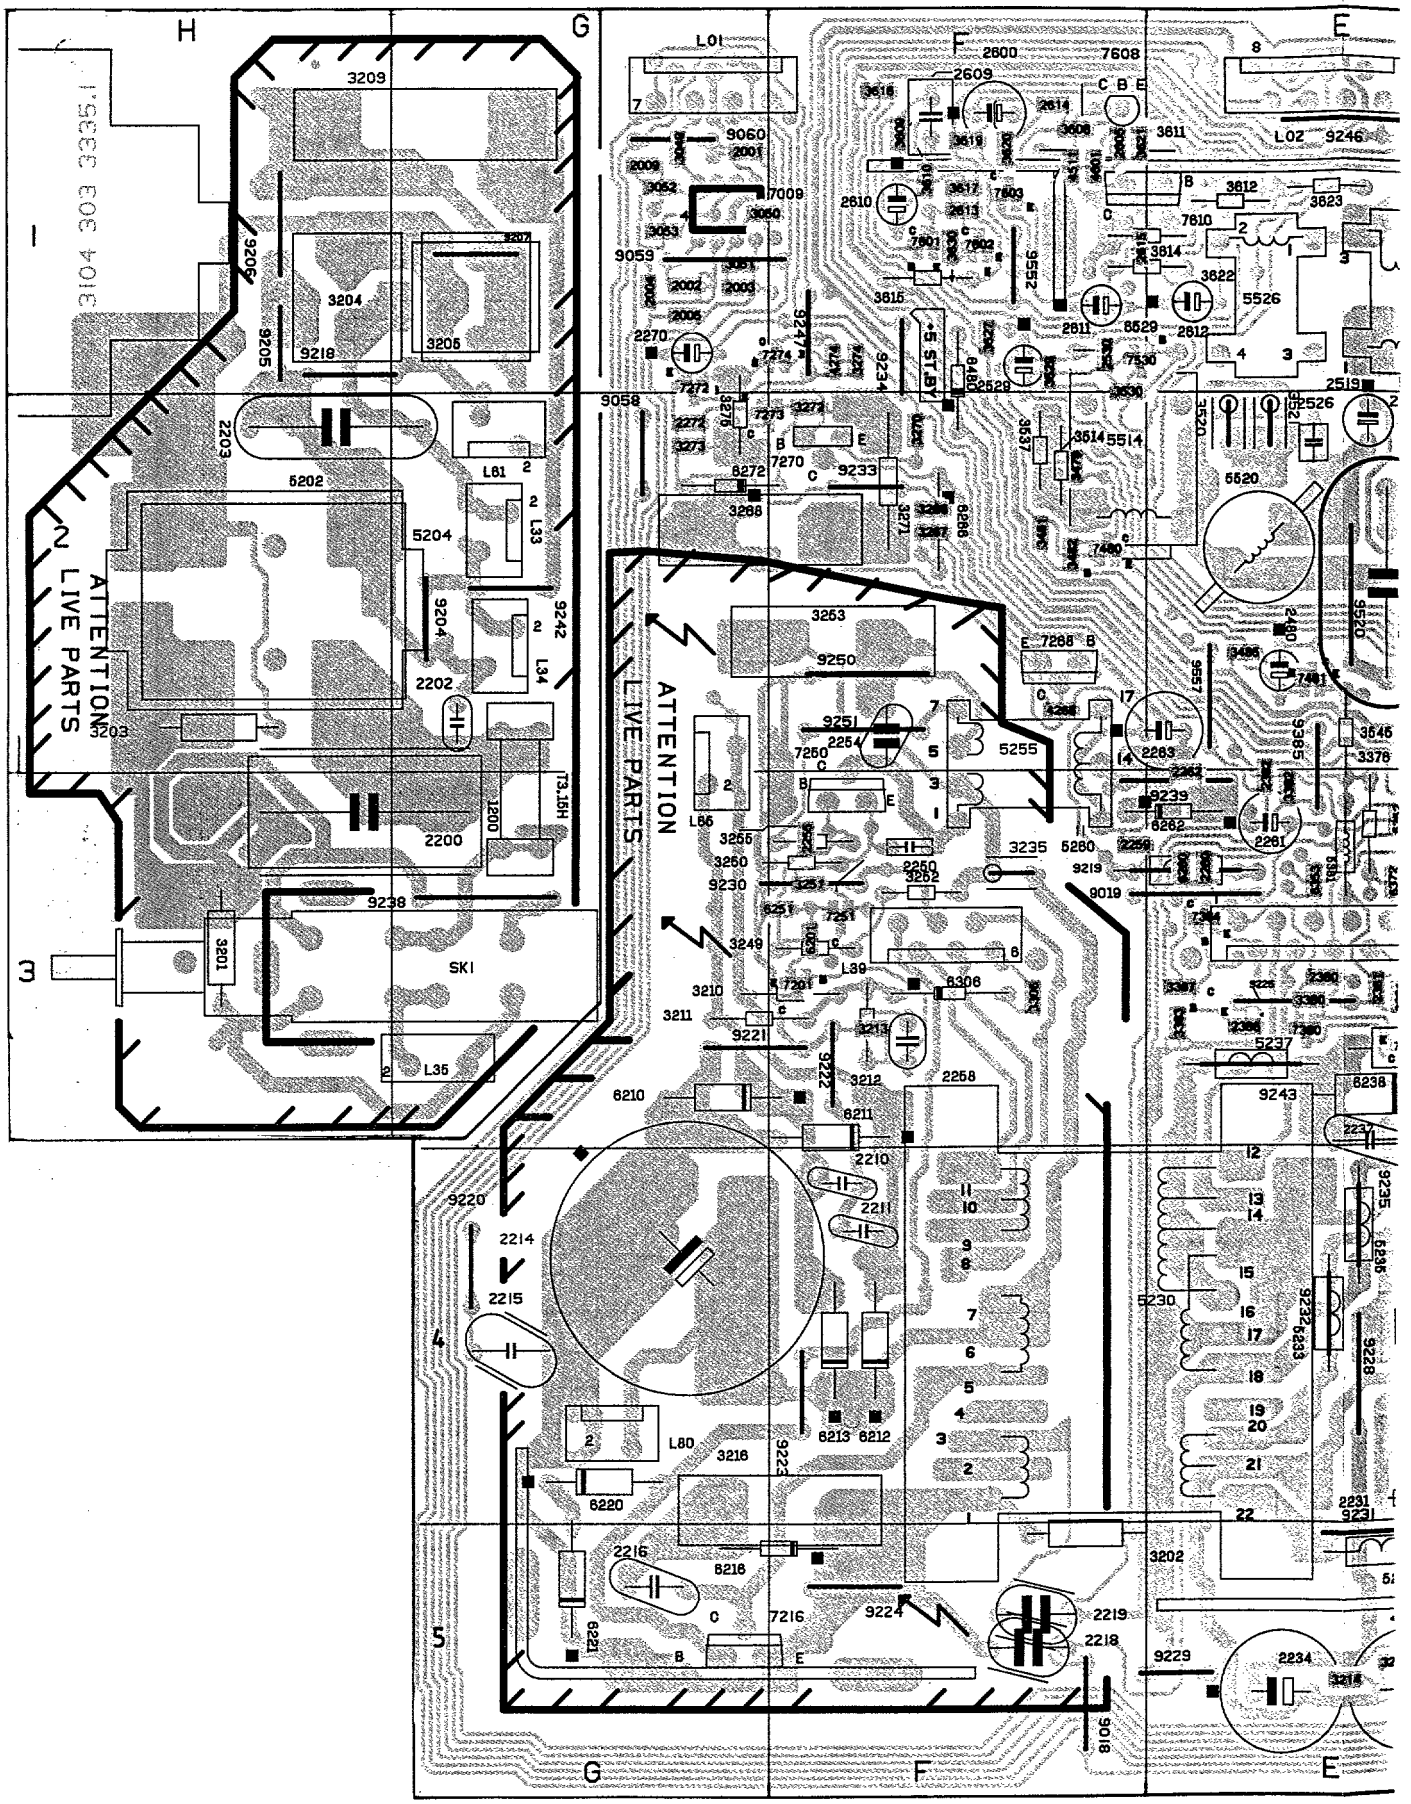

Platine forts signeaux FL X.14 /

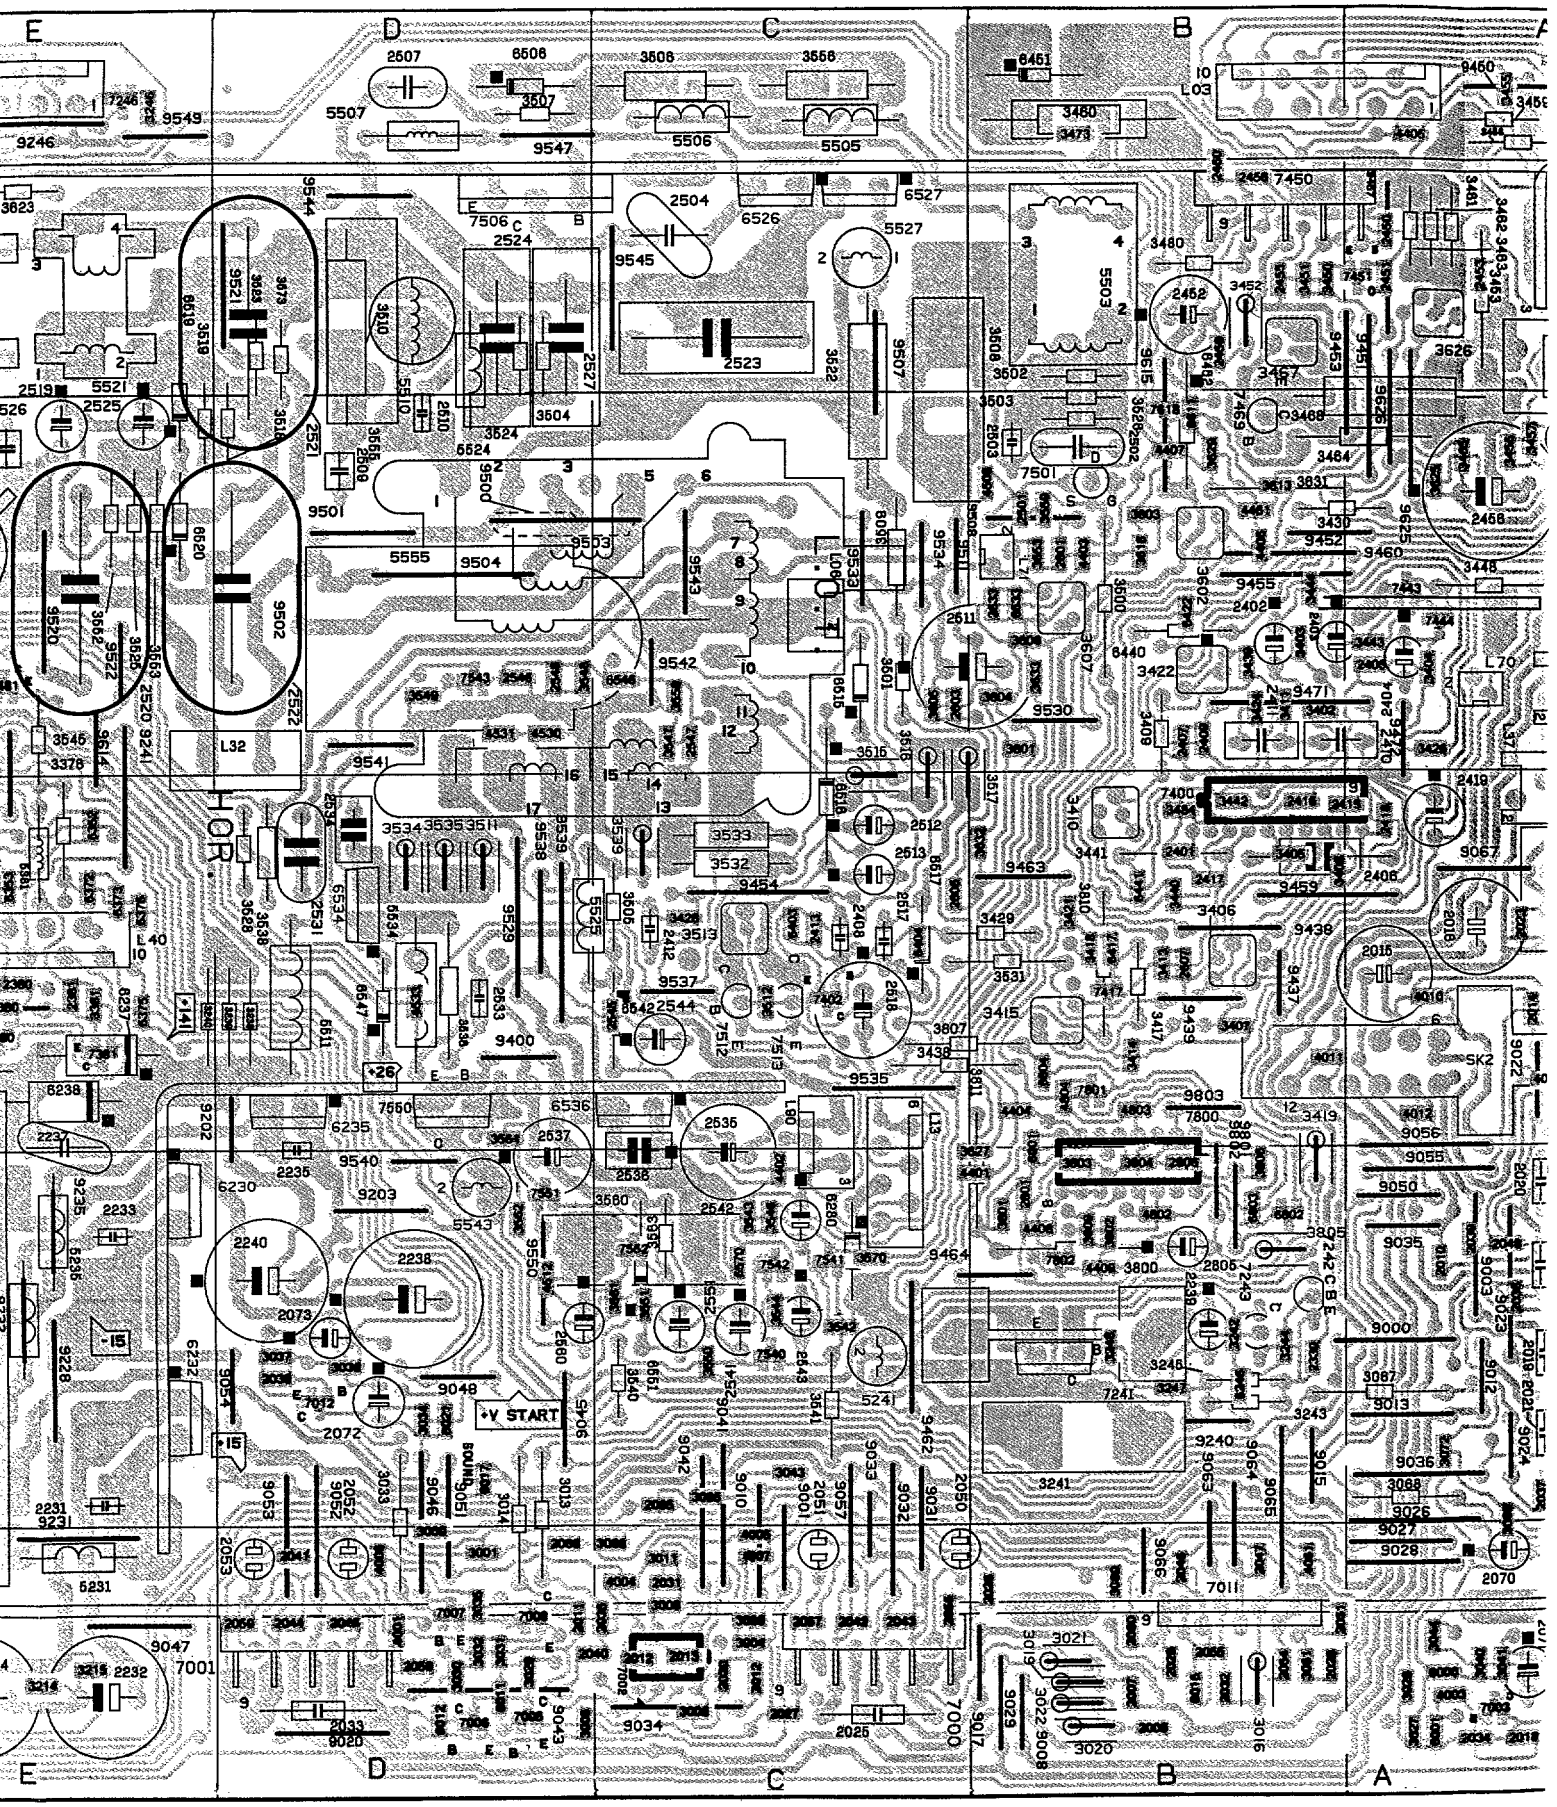

Platine forts signeaux FL X.14 /

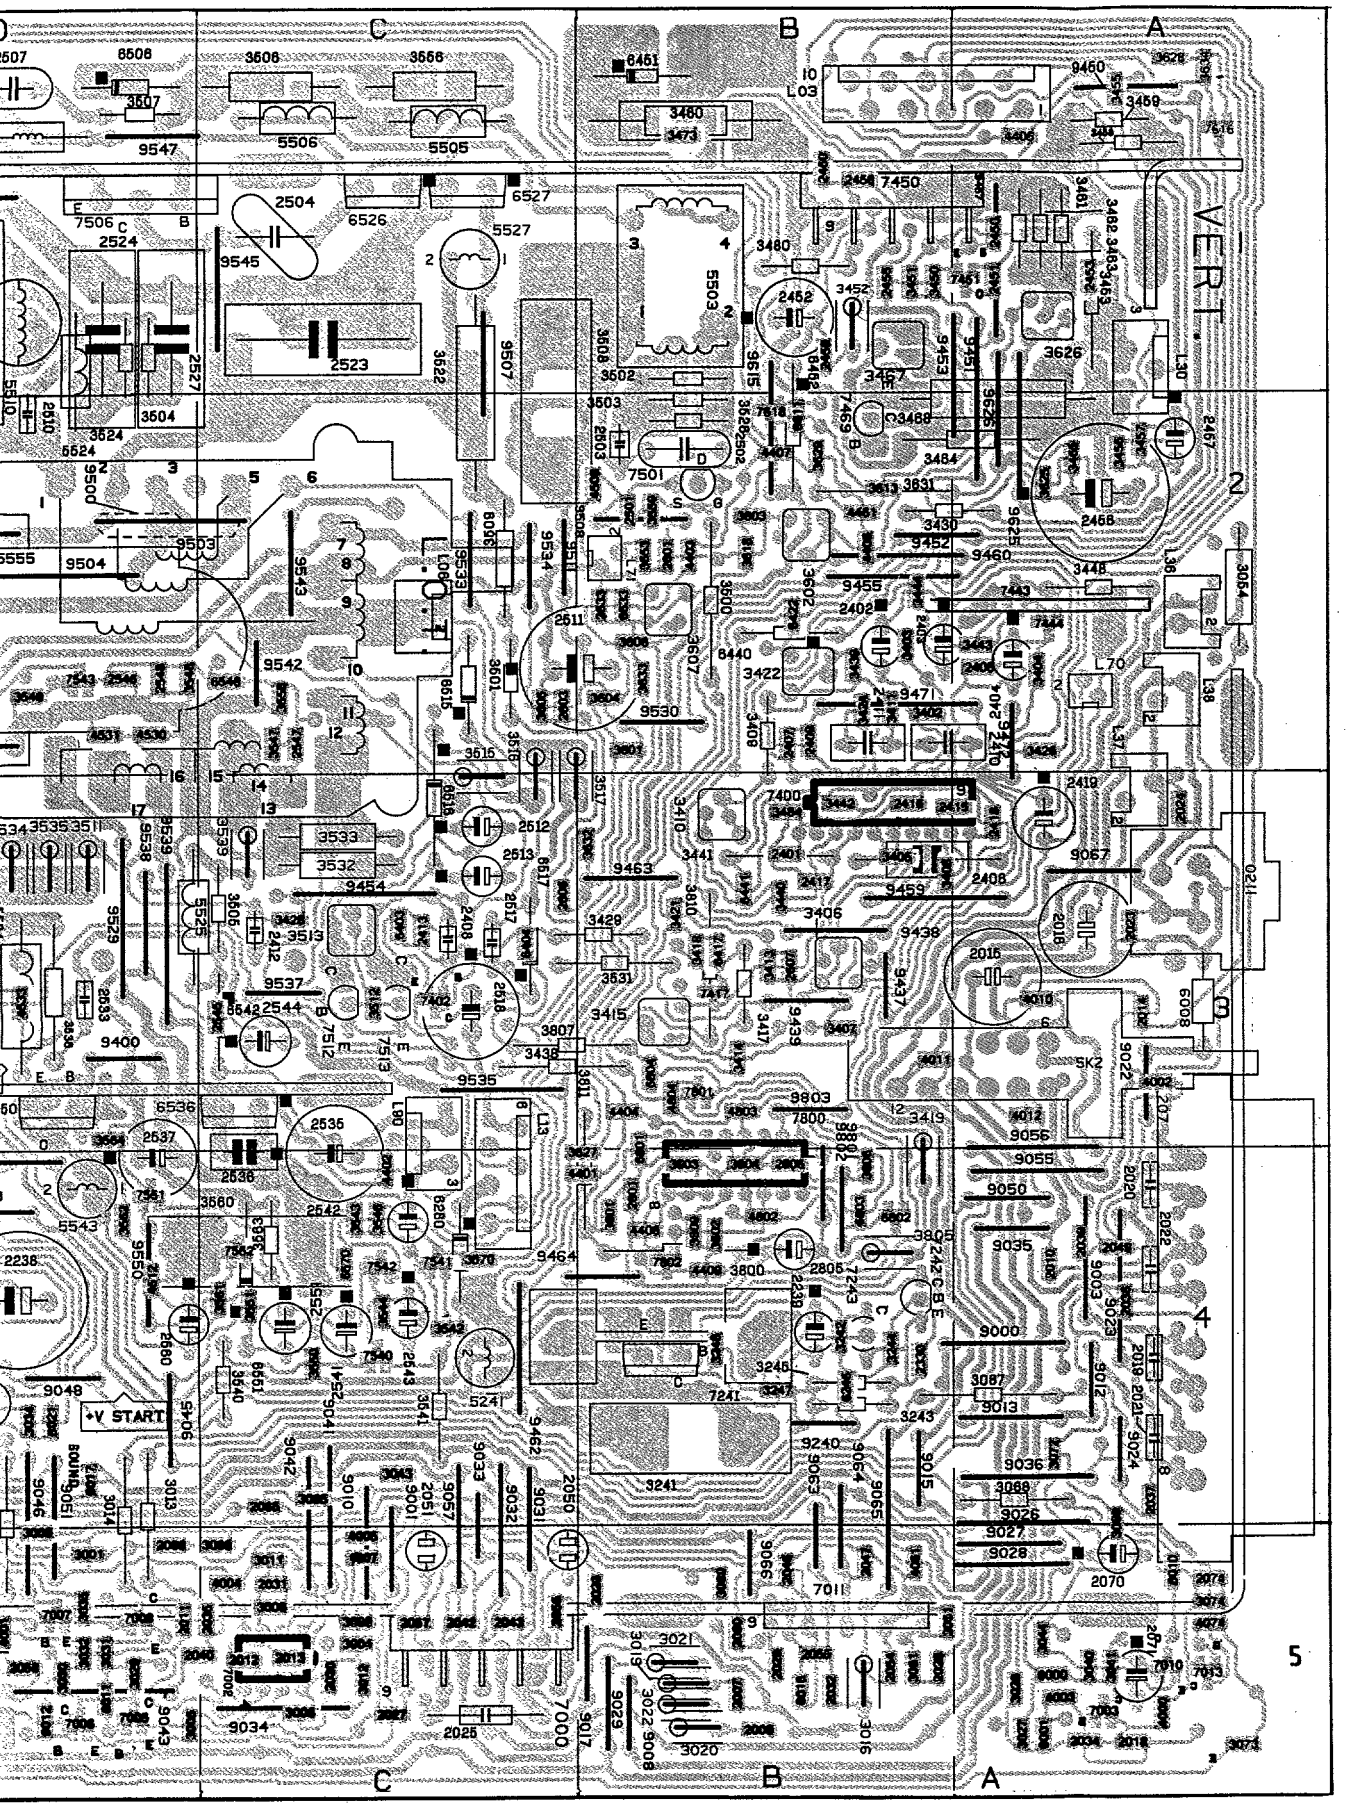

ECO NICAM

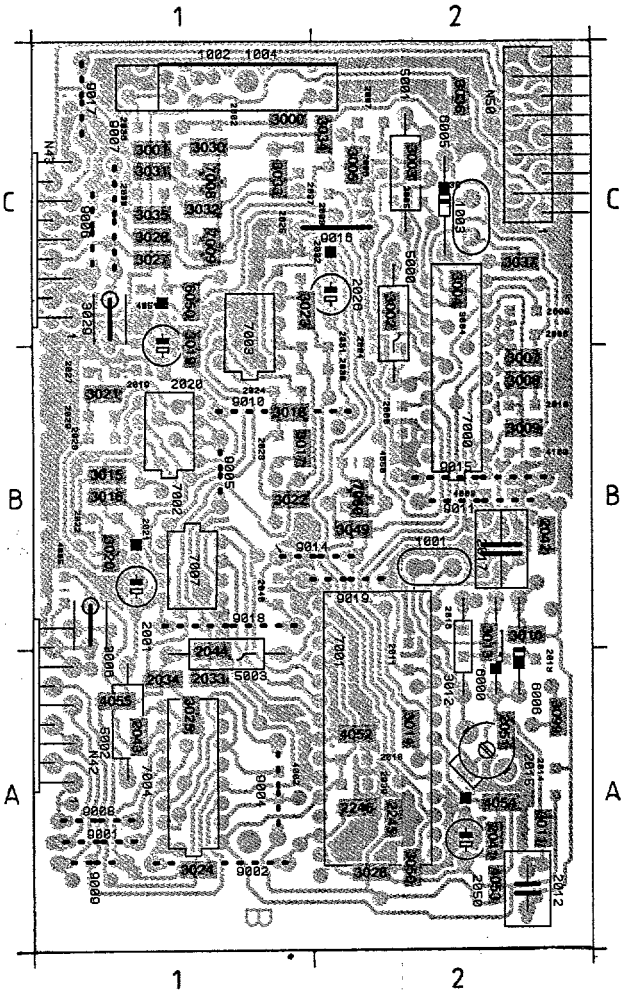

N42	A1	2018	A2	2043	A1	3019	B1	4050	B2	9002	A1				
N43	C1	2019	B1	2044	A1	3020	B1	4051	C1	9004	A1				
N50	C2	2020	B1	2050	A2	3021	B1	4052	A2	9005	B1				
1001	B2	2021	B1	2051	A2	3022	B1	4053	A2	9006	C1				
1002	C1	2022	B1	2245	A2	3023	C1	4054	A2	9007	C1				
1003	C2	2023	B1	2246	A2	3024	A1	4055	A1	9008	A1				
1004	C1	2024	B1	3000	C1	3025	A1	4100	B2	9009	A1				
2000	B2	2025	C1	3001	C1	3026	C1	5000	C2	9010	B1				
2001	B1	2026	C2	3002	C2	3027	C1	5001	C2	9011	B2				
2002	C1	2027	B1	3003	C2	3028	A2	5002	A1	9014	B2				
2003	C2	2028	B1	3004	C2	3029	C1	5003	A1	9015	B2				
2004	B2	2029	B1	3005	C2	3030	C1	6000	A2	9016	C2				
2005	C2	2030	B2	3006	B1	3031	C1	6005	C2	9017	C1				
2006	C2	2031	B2	3007	B2	3032	C1	6006	A2	9018	B1				
2007	C2	2032	C1	3008	B2	3033	C1	6050	C1	9019	B2				
2008	B2	2033	A1	3009	B2	3034	C2	7000	B2						
2009	C2	2034	A1	3010	A2	3035	C1	7001	A2						
2010	B2	2035	C2	3011	A2	3036	C2	7002	B1						
2011	A2	2036	C1	3012	A2	3037	C2	7003	B1						
2012	A2	2037	C1	3013	A2	3049	B2	7004	A1						
2013	A2	2038	C1	3014	A2	3050	A2	7007	B1						
2014	A2	2039	A2	3015	B1	3099	A2	7008	C1						
2015	A2	2040	B1	3016	B1	4002	A1	7009	C1						
2016	A2	2041	A2	3017	B1	4003	B2	7050	B2						
2017	B2	2042	B2	3018	B1	4005	B1	9001	A1						

ECO NICAM

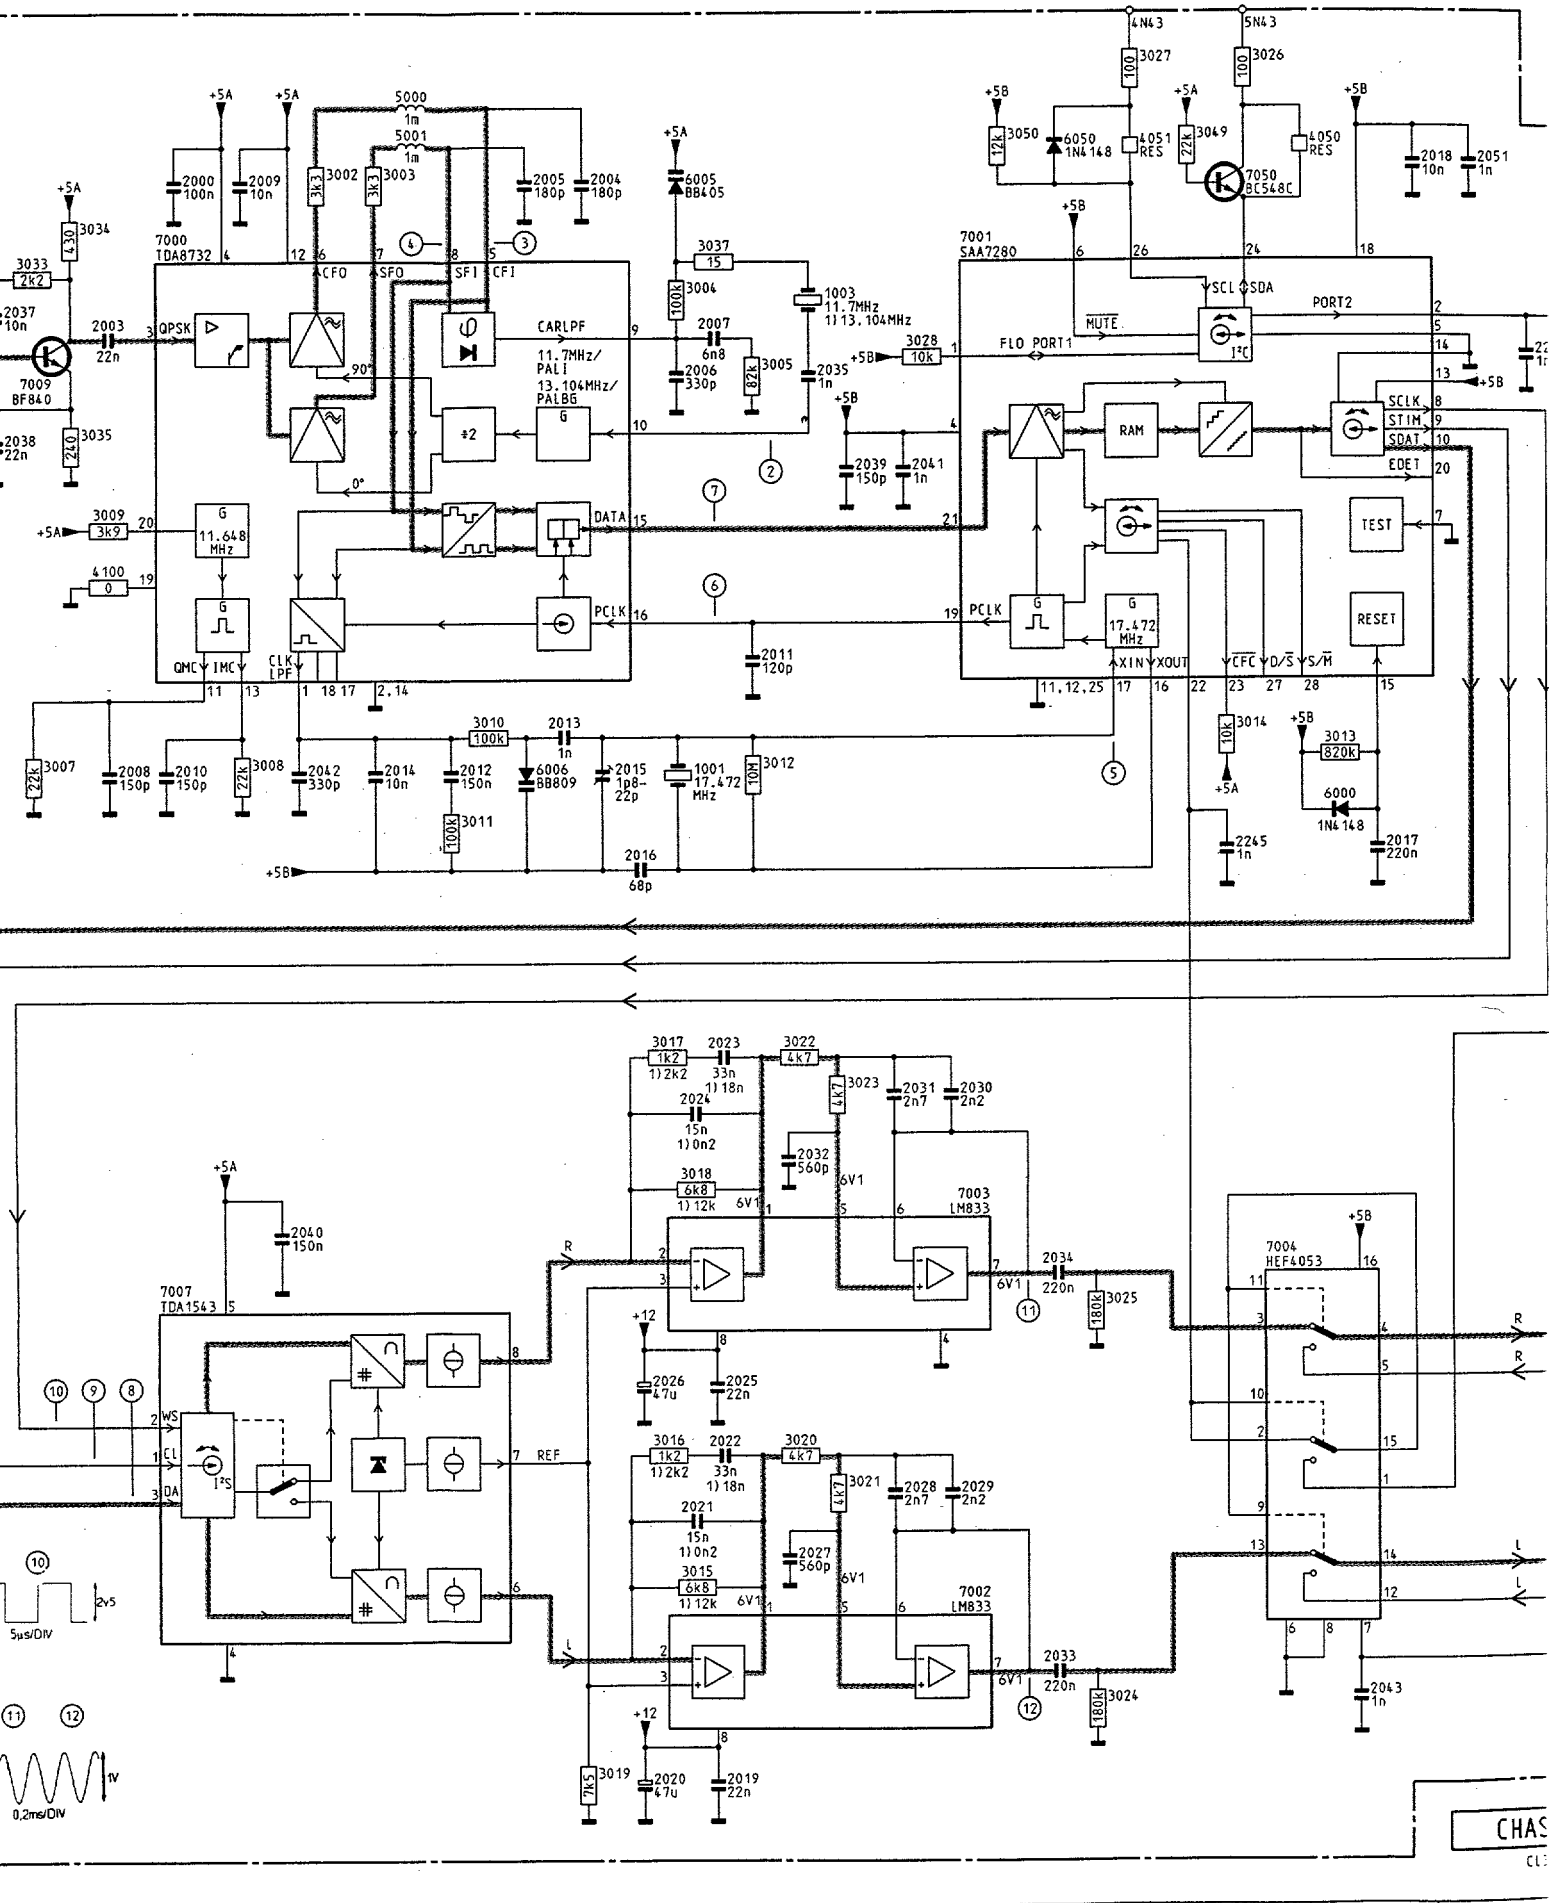

CHAS

PIP panel

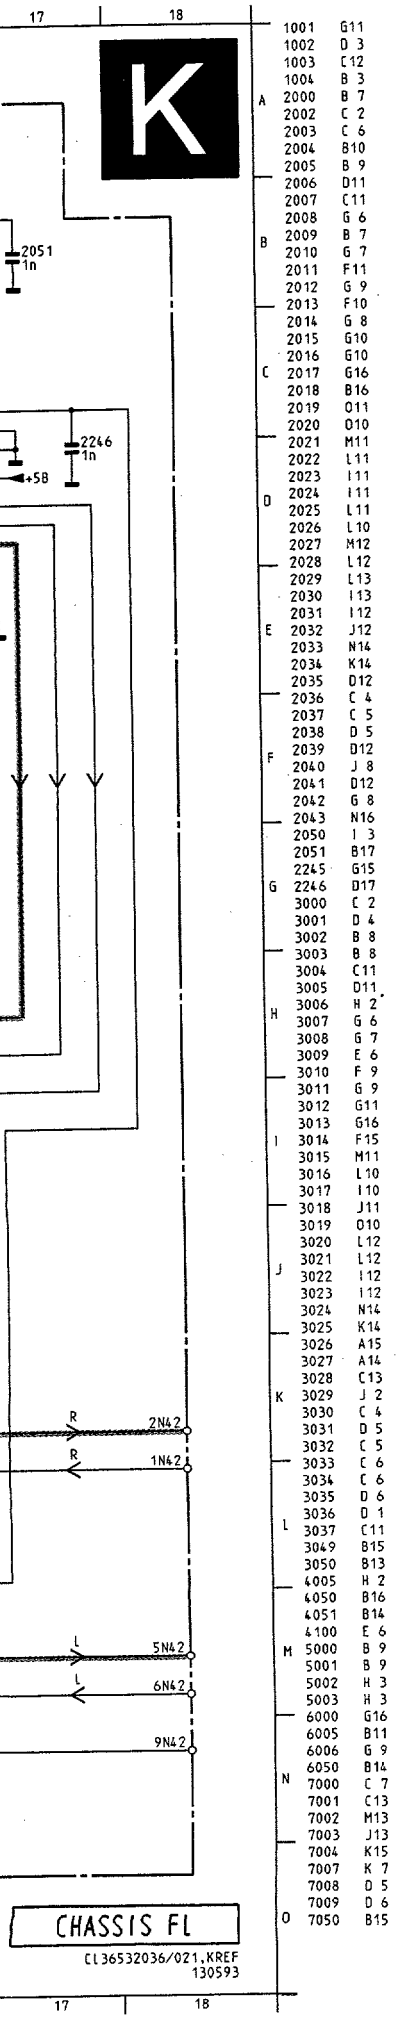

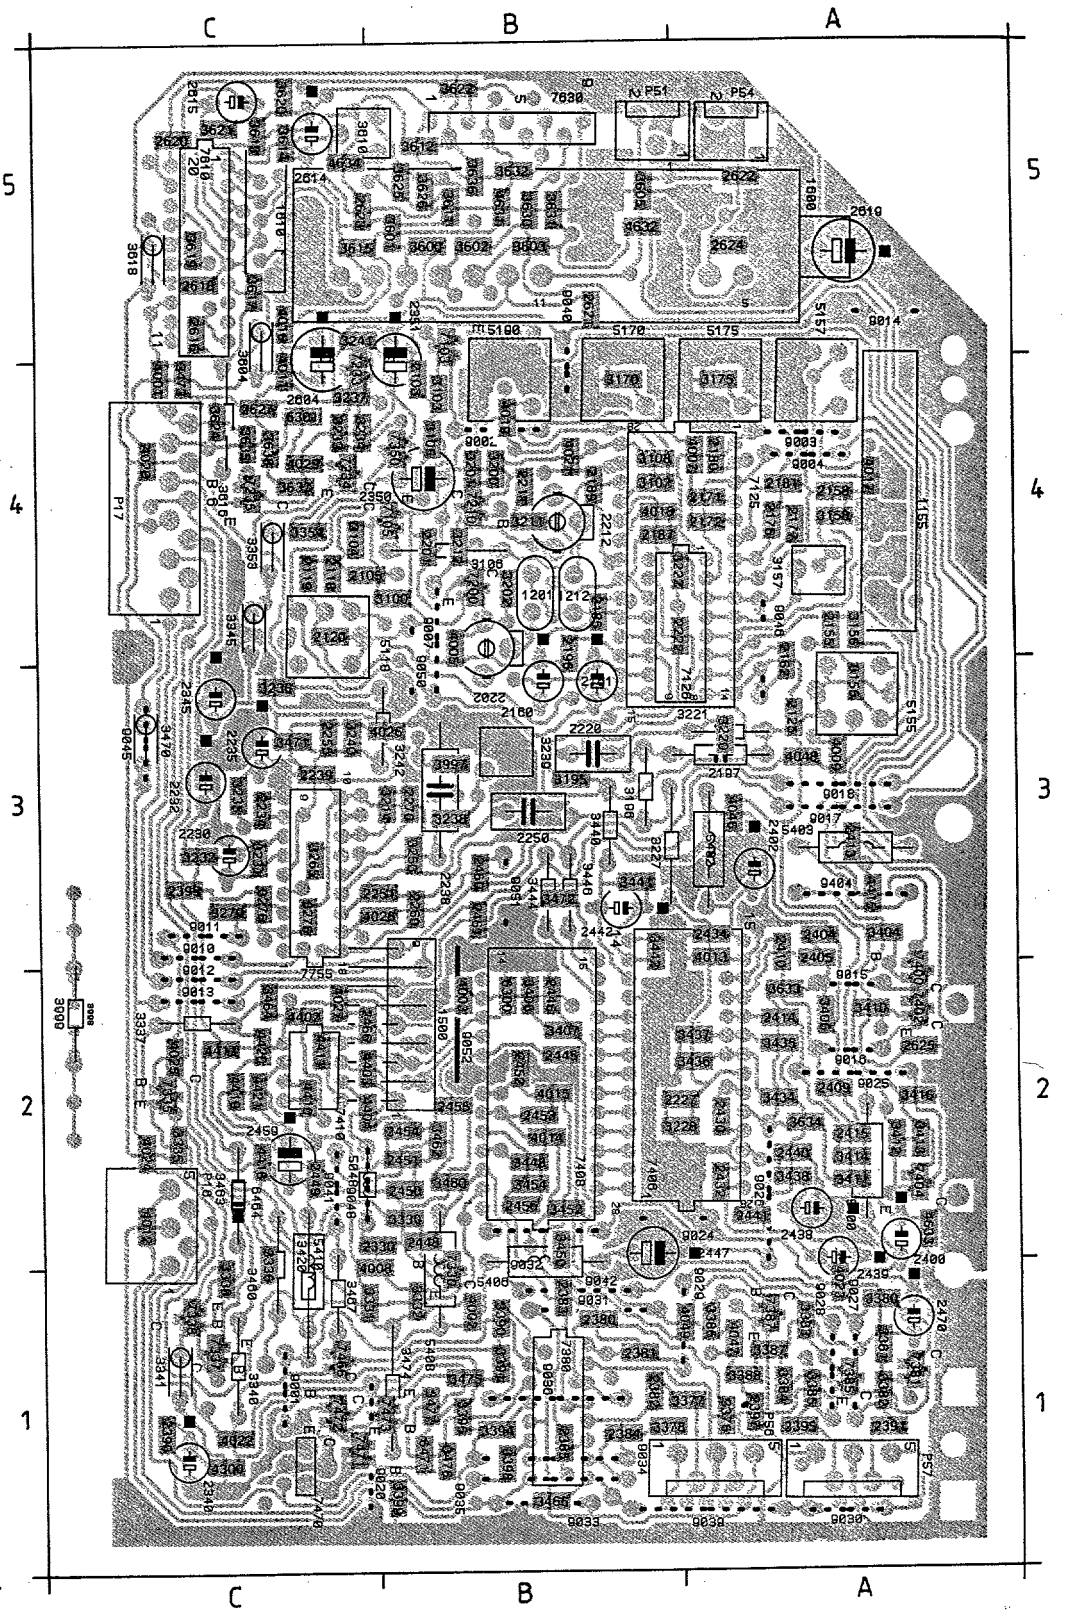

P16 C2	2120 C4	2196 B4	2251 C3	2391 A1	2438 A2	2456 B2	2624 A5	3195 B3	3234 C4
P17 C4	2125 A3	2197 A3	2255 C3	2395 A1	2439 A2	2459 C2	2625 A2	3196 B3	3235 C3
P51 B5	2155 A4	2201 B4	2260 B3	2397 A1	2440 A2	2460 B3	2627 C4	3200 B4	3236 C3
P54 A5	2158 A4	2202 B4	2270 B3	2399 C3	2441 A2	2461 B3	3100 B4	3201 B4	3237 C4
P56 A1	2160 B3	2211 B4	2330 C2	2400 A2	2442 B3	2466 C2	3103 B4	3202 B4	3238 B3
P57 A1	2161 B3	2212 B4	2340 C1	2402 A3	2445 B2	2470 A1	3104 C4	3211 B4	3239 B3
1155 A4	2162 A3	2220 B3	2345 C3	2404 A3	2446 B2	2604 C4	3105 B4	3212 B4	3240 C3
1201 B4	2171 A4	2222 B4	2350 B4	2405 A2	2447 B2	2614 C5	3106 B4	3214 B3	3241 C5
1212 B4	2172 A4	2227 B2	2351 B4	2409 A2	2448 B2	2615 C5	3107 B4	3220 A3	3242 B3
1500 B2	2176 A4	2230 C3	2380 B1	2410 A3	2449 C2	2616 C5	3108 B4	3221 A3	3250 B3
1600 B5	2177 A4	2232 C3	2381 B1	2413 A3	2450 B2	2618 C5	3155 A3	3222 B4	3265 C3
1610 C5	2180 A4	2234 C3	2382 B1	2414 A2	2451 B2	2619 A5	3156 A4	3227 B3	3270 C3
2103 B4	2181 A4	2235 C3	2383 B1	2415 A2	2452 B2	2620 C5	3157 A4	3228 B2	3275 C3
2105 C4	2185 B4	2238 B3	2384 B1	2430 A2	2453 B2	2621 B5	3158 A4	3231 C3	3276 C3
2118 C4	2187 B4	2239 C3	2385 B1	2432 A2	2454 B2	2622 A5	3170 B4	3232 C3	3330 B2
2119 C4	2189 B4	2250 B3	2390 C1	2434 A3	2455 B2	2623 C5	3175 A4	3233 C4	3331 C1

1001 G11	2015 G10	2039 D12	3000 C 2	3024 N14	3049 B15	5000 B 9	6050 B14	7003 J13	
1002 D 3	2016 G10	2040 J 8	3001 D 4	3025 K14	3050 B13	5001 B 9	7000 C 7	7004 K15	
1003 C12	2017 G16	2041 D12	3002 B 8	3026 A15	4005 H 2	5002 H 3	7001 C13	7007 K 7	
1004 B 3	2018 B16	2042 G 8	3003 B 8	3027 A14	4050 B16	5003 H 3	7002 M13	7008 D 5	
2000 B 7	2019 O11	2043 N16	3004 C11	3028 C13	4051 B14	6000 G16		7009 D 6	
2002 C 2	2020 O10	2050 I 3	3005 D11	3029 J 2	4100 E 6	6005 B11		7050 B15	
2003 C 6	2021 M11	2051 B17	3006 H 2	3030 C 4		6006 G 9			
2004 B10	2022 L11	2245 G15	3007 G 6	3031 D 5					
2005 B 9	2023 I11	2246 D17	3008 G 7	3032 C 5					
2006 D11	2024 I11		3009 E 6	3033 C 6					
2007 C11	2025 L11		3010 F 9	3034 C 6					
2008 G 6	2026 L10		3011 G 9	3035 D 6					
2009 B 7	2027 M12		3012 G11	3036 D 1					
2010 G 7	2028 L12		3013 G16	3037 C11					
2011 F11	2029 L13		3014 F15						
2012 G 9	2030 I13		3015 M11						
2013 F10	2031 I12		3016 L10						
2014 G 8	2032 J12		3017 I10						
	2033 N14		3018 J11						
	2034 K14		3019 O10						
	2035 D12		3020 L12						
	2036 C 4		3021 L12						
	2037 C 5		3022 I12						
	2038 D 5		3023 I12						

PIP panel

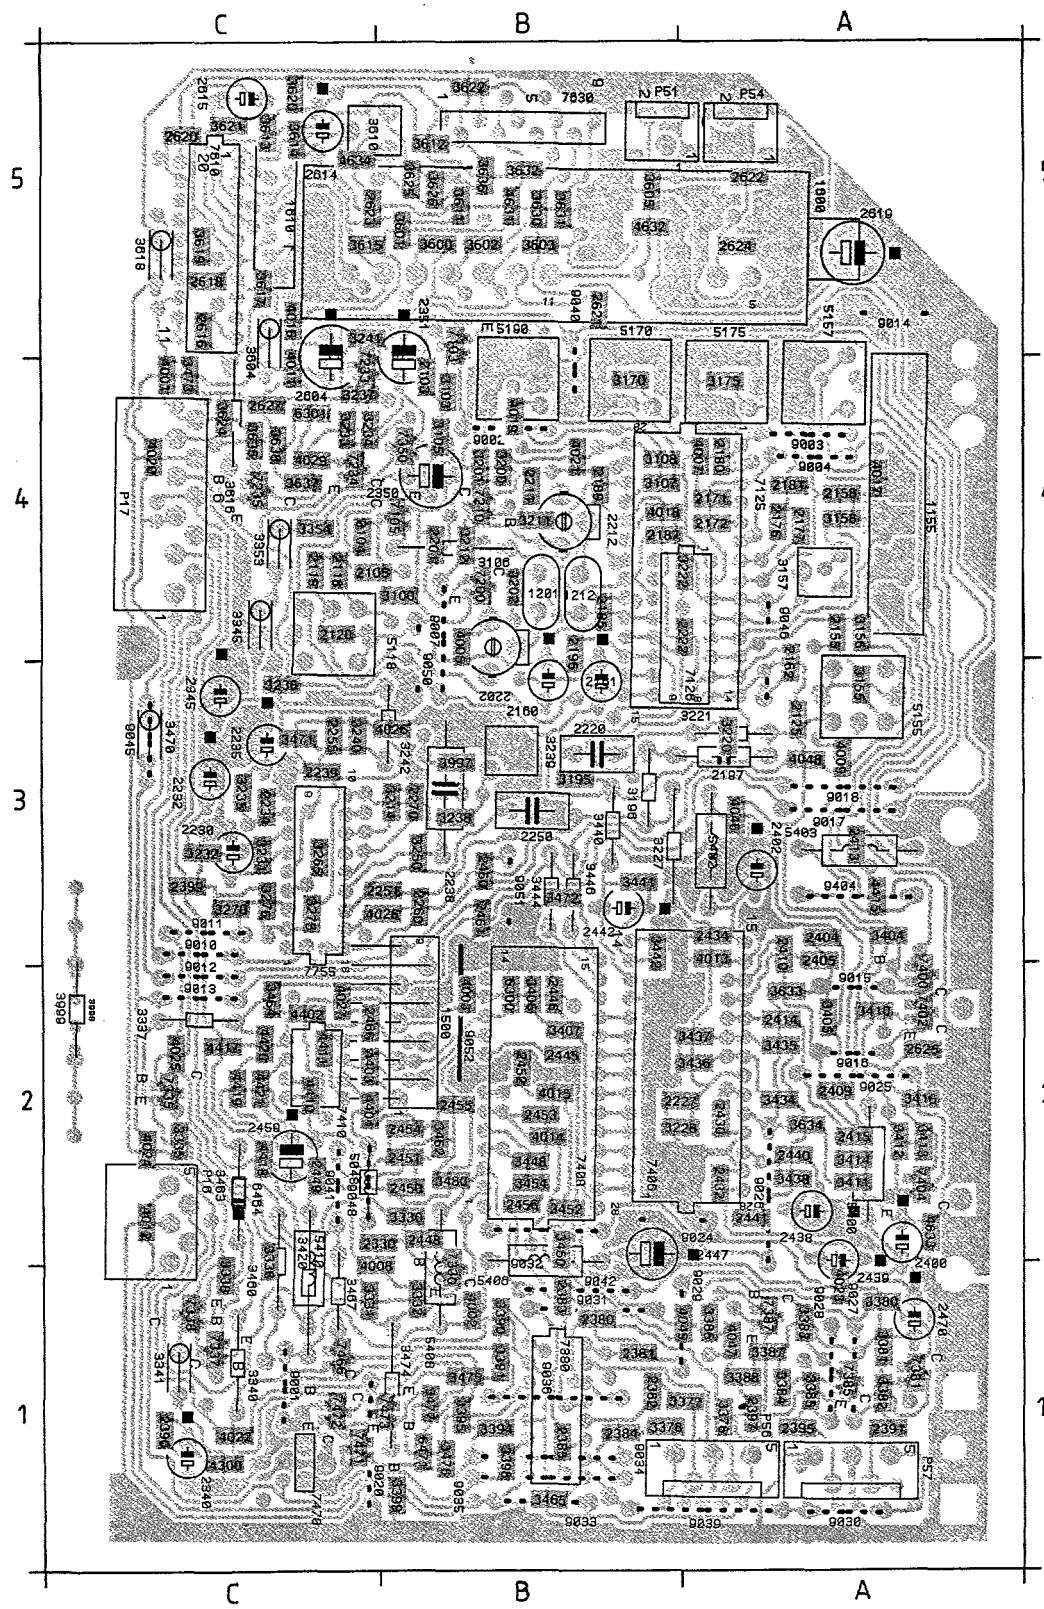

1001 G11
1002 D 3
1003 C12
1004 B 3
2000 B 7
2002 C 2
2003 C 6
2004 B10
2005 B 9
2006 D11
2007 C11
2008 G 6
2009 B 7
2010 G 7
2011 F11
2012 G 9
2013 F10
2014 G 8
2015 G10
2016 G10
2017 G16
2018 B16
2019 O11
2020 O10
2021 M11
2022 L11
2023 I11
2024 I11
2025 L11
2026 L10
2027 M12
2028 L12
2029 L13
2030 I13
2031 I12
2032 J12
2033 N14
2034 K14
2035 D12
2036 C 4
2037 C 5
2038 D 5
2039 D12
2040 J 8
2041 D12
2042 G 8
2043 N16
2050 I 3
2051 B17
2245 G15
2246 D17
3000 C 2
3001 D 4
3002 B 8
3003 B 8
3004 C11
3005 D11
3006 H 2
3007 G 6
3008 G 7
3009 E 6
3010 F 9
3011 G 9
3012 G11
3013 G16
3014 F15
3015 M11
3016 L10
3017 I10
3018 J11
3019 O10
3020 L12
3021 L12
3022 I12
3023 I12
3024 N14
3025 K14
3026 A15
3027 A14
3028 C13
3029 J 2
3030 C 4
3031 D 5
3032 C 5
3033 C 6
3034 C 6
3035 D 6
3036 D 1
3037 C11
3049 B15
3050 B13
4005 H 2
4050 B16
4051 B14
4100 E 6
5000 B 9
5001 B 9
5002 H 3
5003 H 3
6000 G16
6005 B11
6006 G 9
6050 B14
7000 C 7
7001 C13
7002 M13
7003 J13
7004 K15
7007 K 7
7008 D 5
7009 D 6
7050 B15

P16 C2
P17 C4
P51 B5
P54 A5
P56 A1
P57 A1
1155 A4
1201 B4
1212 B4
1500 B2
1600 B5
1610 C5
2103 B4
2105 C4
2118 C4
2119 C4
2120 C4
2125 A3
2155 A4
2158 A4
2160 B3
2161 B3
2162 A3
2171 A4
2172 A4
2176 A4
2177 A4
2180 A4
2181 A4
2185 B4
2187 B4
2189 B4
2196 B4
2197 A3
2201 B4
2202 B4
2211 B4
2212 B4
2220 B3
2222 B4
2227 B2
2230 C3
2232 C3
2234 C3
2235 C3
2238 B3
2239 C3
2250 B3
2251 C3
2255 C3
2260 B3
2270 B3
2330 C2
2340 C1
2345 C3
2350 B4
2351 B4
2380 B1
2381 B1
2382 B1
2383 B1
2384 B1
2385 B1
2390 C1
2391 A1
2395 A1
2397 A1
2399 C3
2400 A2
2402 A3
2404 A3
2405 A2
2409 A2
2410 A3
2413 A3
2414 A2
2415 A2
2430 A2
2432 A2
2434 A3
2438 A2
2439 A2
2440 A2
2441 A2
2442 B3
2445 B2
2446 B2
2447 B2
2448 B2
2449 C2
2450 B2
2451 B2
2454 B2
2455 B2
2456 B2
2459 C2
2460 B3
2461 B3
2466 C2
2470 A1
2604 C4
2614 C5
2615 C5
2616 C5
2618 C5
2619 A5
2620 C5
2621 B5
2622 A5
2623 C5
2624 A5
2625 A2
2627 C4
3100 B4
3103 B4
3104 C4
3105 B4
3106 B4
3107 B4
3108 B4
3155 A3
3156 A4
3157 A4
3158 A4
3170 B4
3175 A4
3195 B3
3196 B3
3200 B4
3201 B4
3202 B4
3211 B4
3212 B4
3214 B3
3220 A3
3221 A3
3222 B4
3227 B3
3228 B2
3231 C3
3232 C3
3233 C4
3234 C4
3235 C3
3236 C3
3237 C4
3238 B3
3239 B3
3240 C3
3241 C5
3242 B3
3250 B3
3265 C3
3270 C3
3275 C3
3276 C3
3330 B2
3331 C1
3332 B1
3335 C2
3336 C1
3337 C2
3338 C1
3340 C1
3341 C1
3345 C4
3353 C4
3354 C4
3376 A1
3377 A1
3378 B1
3380 A1
3381 A1
3382 A1
3383 A1
3384 A1
3385 A1
3386 A1
3387 A1
3388 A1
3390 B1
3391 B1
3394 B1
3395 B1
3398 B1
3399 B1
3404 A3
3405 A2
3406 B2
3407 B2
3410 A2
3411 A2
3412 A2
3413 A2
3414 A2
3416 A2
3420 C1
3434 A2
3435 A2
3436 A2
3437 A2
3438 A2
3440 B3
3441 B3
3442 B3
3444 B3
3446 B3
3448 B2
3450 B2
3452 B2
3454 B2
3460 C1
3462 B2
3463 C2
3464 C2
3465 B1
3467 C1
3471 C3
3472 B3
3473 C4
3474 B1
3475 B1
3476 B1
3477 B1
3480 B2
3600 B5
3601 B5
3602 B5
3603 B5
3604 C4
3605 B5
3610 C5
3611 B5
3612 B5
3613 C5
3614 C5
3615 C5
3616 C4
3617 C5
3618 C5
3619 C5
3620 C5
3621 C5
3622 B5
3623 C5
3627 C4
3633 A2
3634 A2
3635 C4
3636 B5
3637 C4
3638 C4
3997 B3
4001 C4
4002 B1
4003 B2
4005 B4
4007 A4
4008 C1
4009 A3
4011 C4
4012 C2
4013 A3
4014 B2
4015 B2
4016 C5
4017 A4
4018 B4
4019 B4
4020 C4
4021 B4
4022 C1
4023 A1
4024 C2
4025 C2
4026 B3
4027 C2
4028 C3
4029 C4
4046 A3
4047 A1
4048 A3
4049 A1
4300 C1
4402 C2
4403 C2
4404 C2
4410 C2
4411 C2
4415 A3
4417 C2
4418 C2
4419 C2
4420 C2
4421 C2
4631 B5
4632 B5
4633 A2
4634 C5
5048 C2
5118 C4
5155 A3
5157 A4
5170 B4
5175 A4
5190 B4
5400 A2
5402 A3
5403 A3
5406 B1
5408 B1
5410 C1
6300 B2
6301 C4
6464 C2
6471 B1
7103 B5
7105 B4
7125 B4
7126 B4
7200 B4
7210 B4
7233 C4
7234 C4
7235 C4
7330 B1
7335 C2
7337 C1
7338 C1
7350 B4
7380 B1
7385 A1
7387 A1
7400 A2
7402 A2
7404 A2
7406 A2
7408 B2
7410 C2
7466 C1
7470 C1
7471 C1
7472 C1
7473 B1
7610 C5
7630 B5
7755 C3
9001 C1
9002 B4
9003 A4
9004 A4
9007 B4
9010 C2
9011 C3
9012 C2
9013 C2
9014 A5
9015 A2
9016 A2
9017 A3
9018 A3
9020 C1
9024 B2
9025 A2
9026 A2
9027 A1
9028 A1
9029 A1
9030 A1
9031 B1
9032 B2
9033 B1
9034 B1
9035 B1
9036 B1
9039 A1
9040 B4
9041 C2
9042 B1
9045 C3
9046 A4
9048 C2
9050 B3
9051 B3
9052 B2
9404 A3

Picture in picture / Bild im Bild /

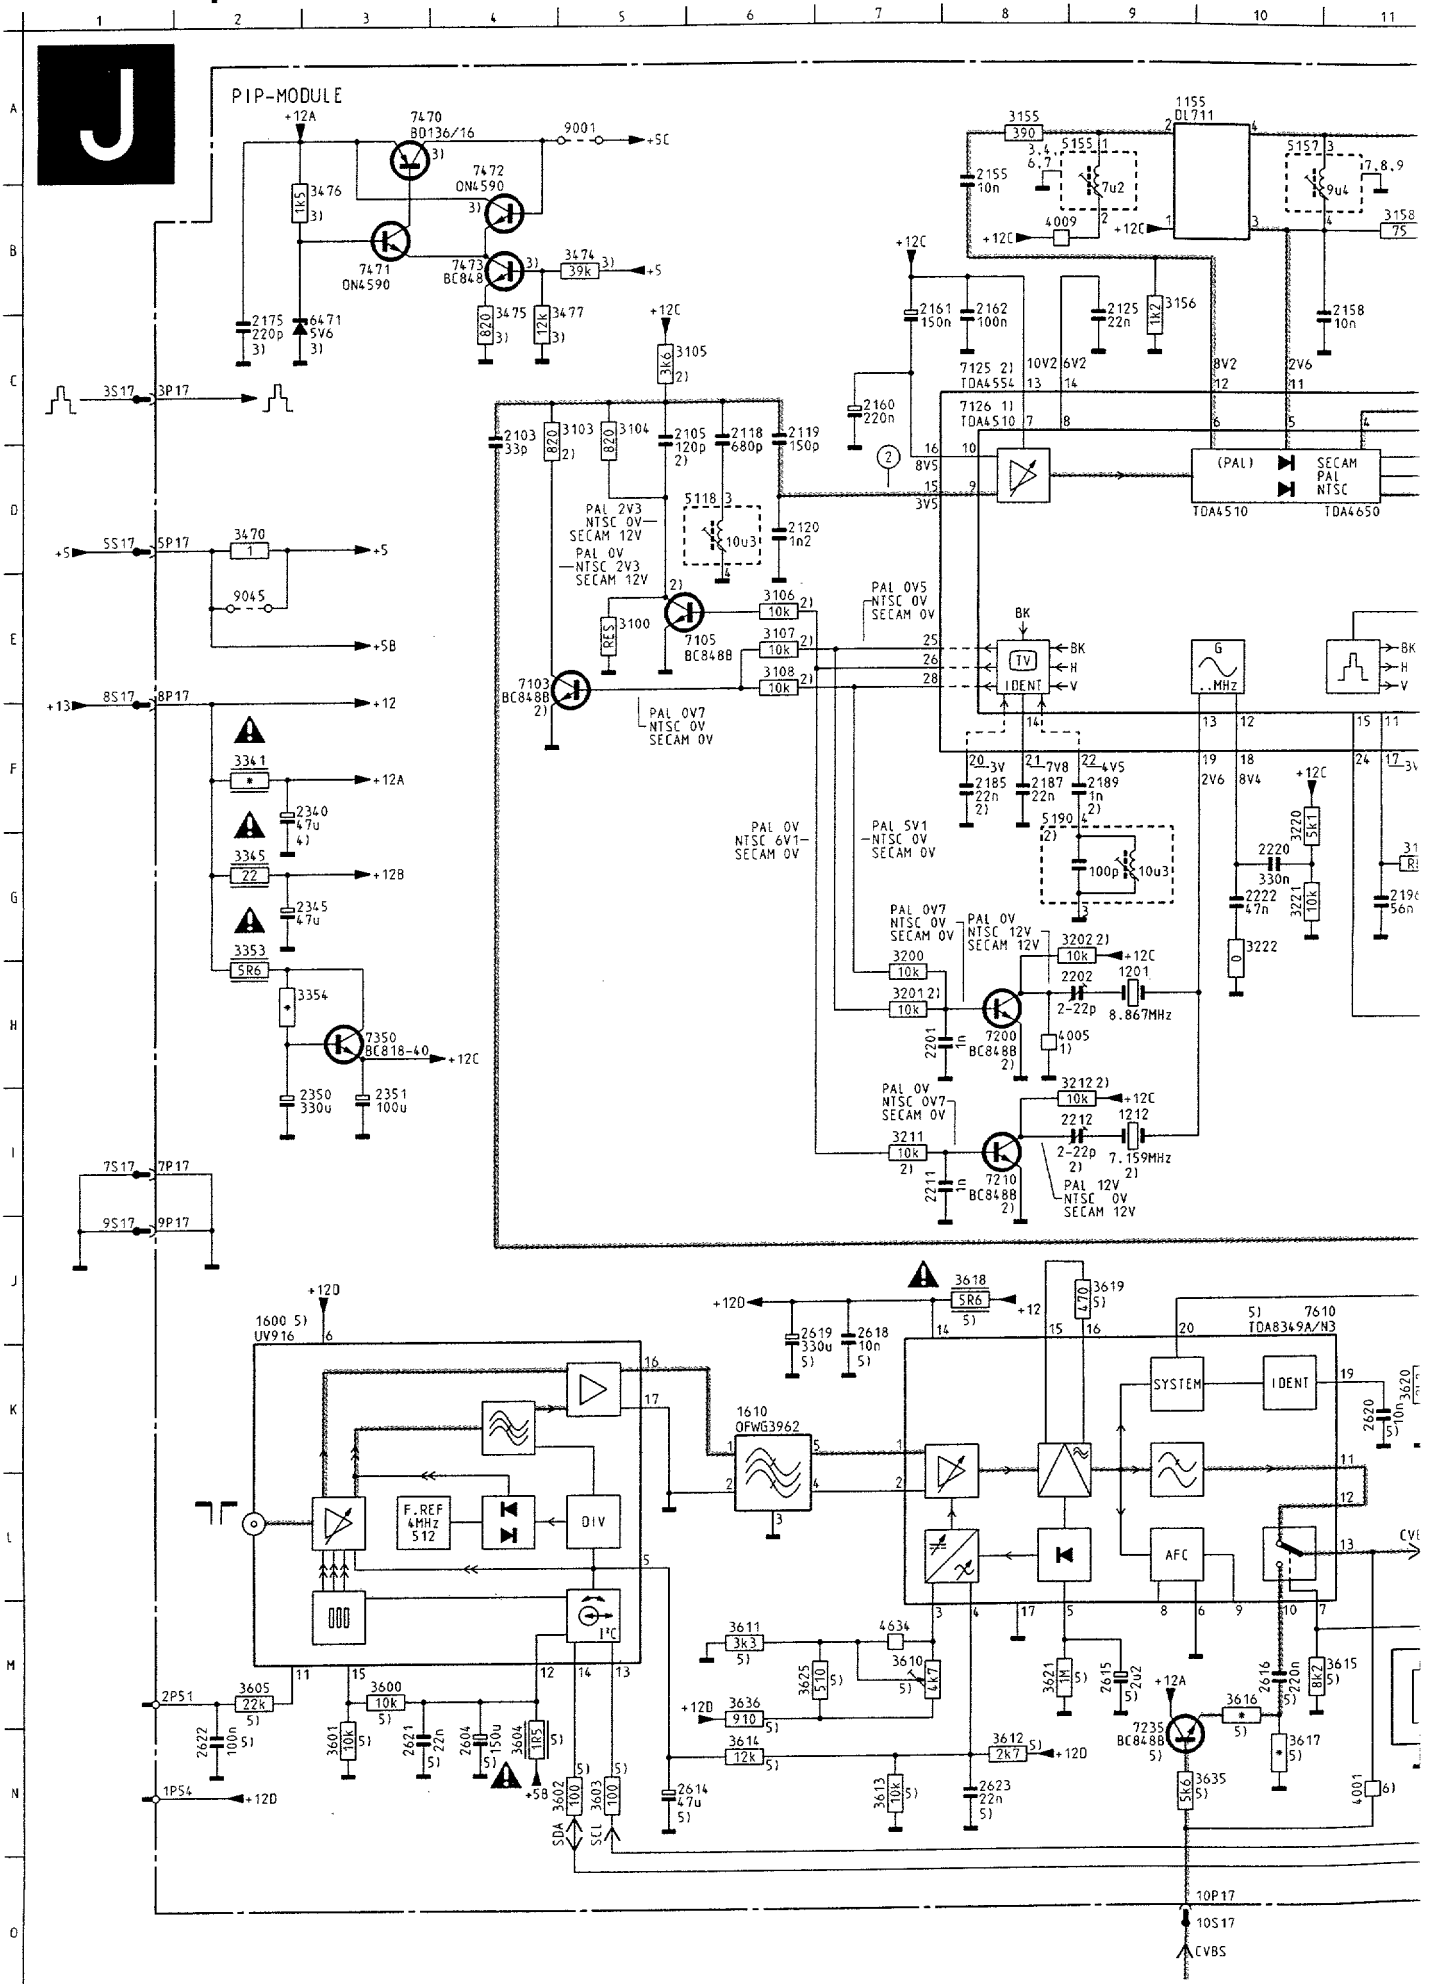

Image dans l'image

PIP processing
Bild-in-Bild-Prozessor (PIP)
Processore PIP
Traitement incrustation (PIP)

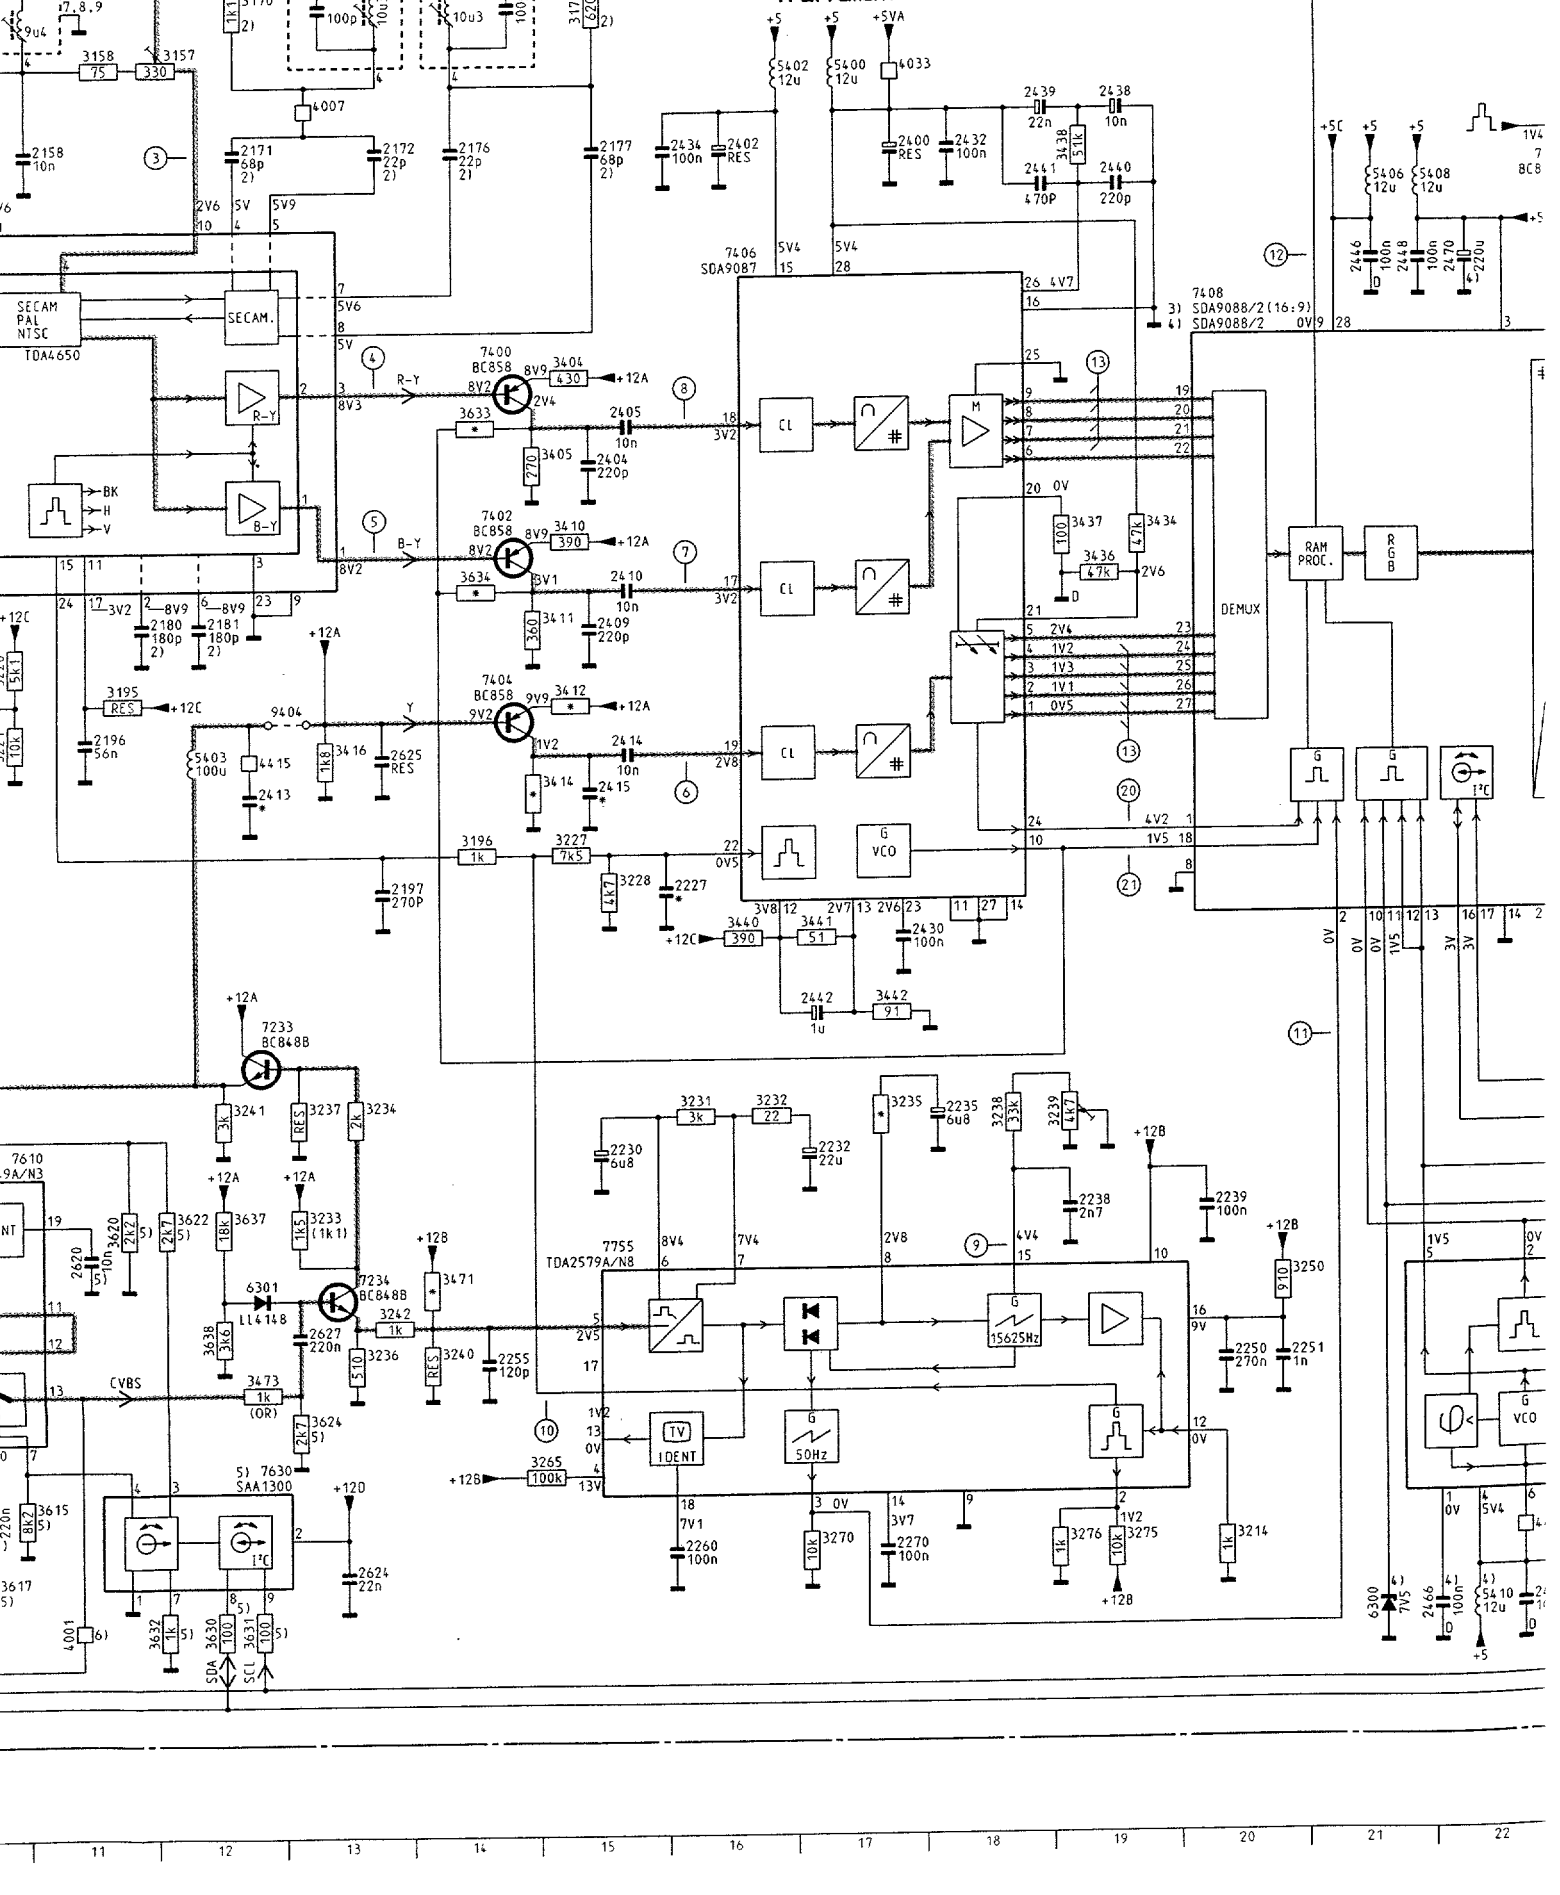

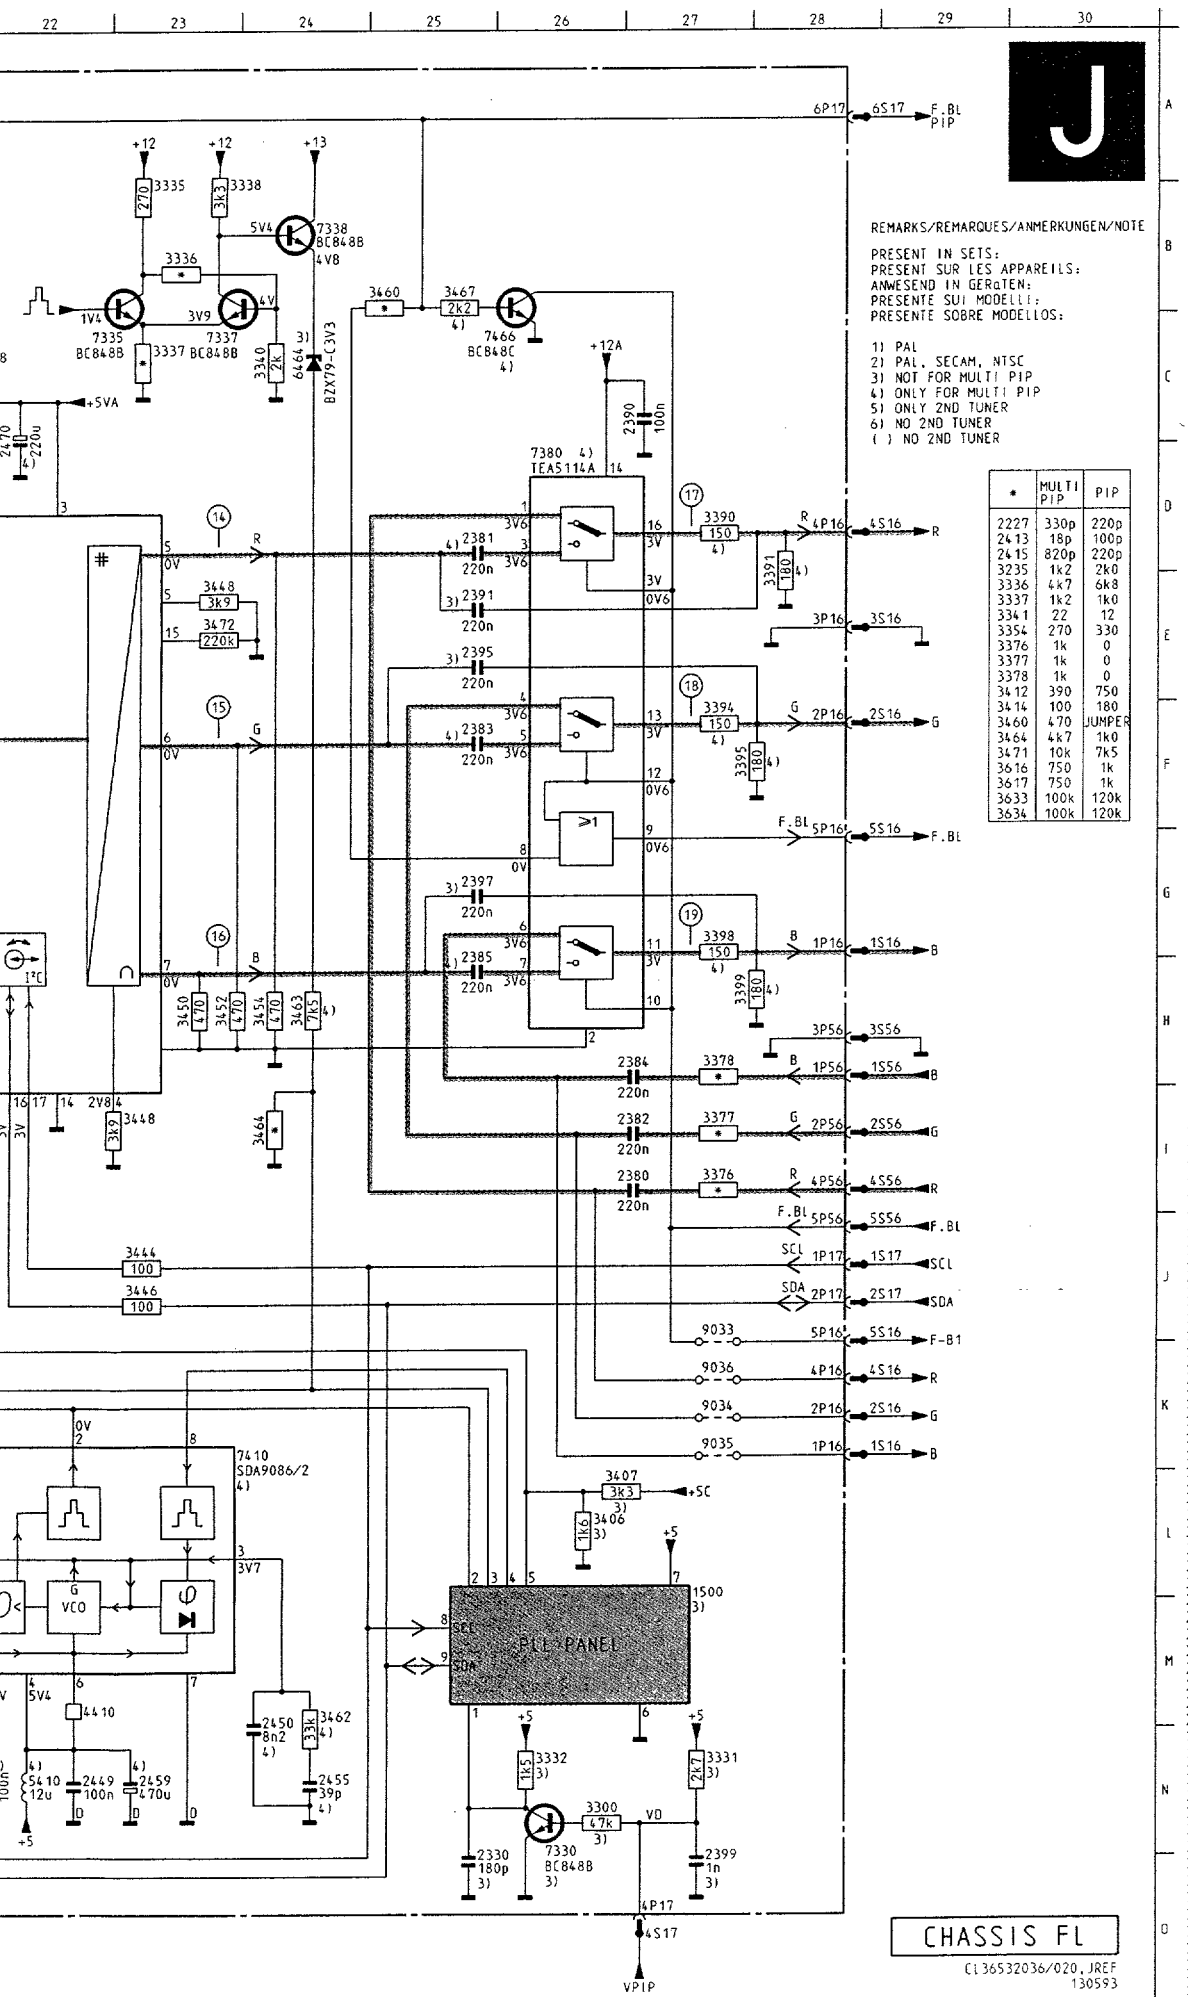

	1155	A 9	3201	H 7	4007	B13
	1201	H 9	3202	G 9	4009	B 8
	1212	I 9	3211	I 7	4033	B17
	1500	L27	3212	I 9	4410	M22
A	1600	J 2	3214	M20	4415	G12
	1610	K 6	3220	G10	4634	M 7
	2103	D 4	3221	G10	5118	D 5
	2105	D 5	3222	G10	5155	A 8
	2118	D 6	3227	H15	5157	A10
	2119	D 6	3228	H15	5170	A13
	2120	D 6	3231	J16	5175	A14
	2125	C 9	3232	J16	5190	G 8
B	2155	B 8	3233	K13	5400	B17
	2158	C11	3234	J13	5402	B16
	2160	C 7	3235	J17	5403	G12
	2161	C 7	3236	L13	5406	C21
	2162	C 8	3237	J13	5408	C21
	2171	C12	3238	J18	5410	N22
	2172	C13	3239	J19	6300	N21
	2175	C 2	3240	L14	6301	K12
C	2176	C14	3241	J12	6464	C24
	2177	C15	3242	L13	6471	C 3
	2180	F11	3250	K20	7103	E 4
	2181	F12	3265	M15	7105	E 5
	2185	F 8	3270	M17	7125	C 8
	2187	F 8	3275	M19	7126	C 8
	2189	F 9	3276	M19	7200	H 8
D	2196	G11	3300	N26	7210	I 8
	2197	H13	3331	N27	7233	I12
	2201	H 7	3332	N26	7234	K13
	2202	H 9	3335	A23	7235	N 9
	2211	I 7	3336	B23	7330	N26
	2212	I 9	3337	C23	7335	C23
	2220	G10	3338	A23	7337	C23
	2222	G10	3340	C24	7338	B24
E	2227	H16	3341	F 2	7350	H 3
	2230	J15	3345	G 2	7380	D26
	2232	J17	3353	G 2	7400	D14
	2235	J18	3354	H 2	7402	E14
	2238	K19	3376	I27	7404	G14
	2239	K20	3377	I27	7406	C16
	2250	L20	3378	H27	7408	D20
F	2251	L20	3390	D27	7410	K23
	2255	L14	3391	D28	7466	C26
	2260	M16	3394	F27	7470	A 3
	2270	M17	3395	F27	7471	B 3
	2330	O25	3398	G27	7472	A 4
	2340	F 2	3399	H27	7473	B 4
	2345	G 2	3404	D15	7610	J11
	2350	I 2	3405	E15	7630	M13
G	2351	I 3	3406	L26	7755	K15
	2380	I27	3407	L26	9001	A 5
	2381	O25	3410	F15	9033	J27
	2382	I27	3411	F15	9034	K27
	2383	F25	3412	G15	9035	K27
	2384	H27	3414	G15	9036	K27
	2385	H25	3416	G13	9045	E 2
	2390	C27	3434	E19	9404	G13
H	2391	E25	3436	F19		
	2395	E25	3437	E19		
	2397	G25	3438	C19		
	2399	O27	3440	I16		
	2400	C17	3441	I17		
	2402	C16	3442	I17		
	2404	E15	3444	J23		
I	2405	E15	3446	J23		
	2409	F15	3448	I23		
	2410	F15	3448	E23		
	2413	H12	3450	H23		
	2414	G15	3452	H23		
	2415	H15	3454	H24		
	2430	I17	3460	B25		
J	2432	C18	3462	M24		
	2434	C16	3463	H24		
	2438	B19	3464	I24		
	2439	B18	3467	B25		
	2440	C19	3470	D 2		
	2441	C18	3471	K14		
	2442	I17	3472	E23		
	2446	C21	3473	L12		
K	2448	C21	3474	B 5		
	2449	N22	3475	B 4		
	2450	M24	3476	B 3		
	2455	N24	3477	B 4		
	2459	N23	3600	M 3		
	2466	N21	3601	N 3		
	2470	C22	3602	N 5		
L	2604	N 4	3603	N 5		
	2614	N 5	3604	N 4		
	2615	M 9	3605	M 2		
	2616	M10	3610	M 7		
	2618	K 7	3611	M 6		
	2619	K 6	3612	N 8		
	2620	K11	3613	N 7		
	2621	N 3	3614	N 6		
M	2622	N 2	3615	M11		
	2623	N 8	3616	M10		
	2624	N13	3617	N10		
	2625	G13	3618	J 8		
	2627	L13	3619	J 9		
	3100	E 5	3620	K11		
	3103	C 5	3621	M 8		
	3104	C 5	3622	K12		
N	3105	C 5	3624	L13		
	3106	E 6	3625	M 6		
	3107	E 6	3630	N12		
	3108	E 6	3631	N12		
	3155	A 8	3632	N12		
	3156	B 9	3633	E14		
	3157	B12	3634	F14		
	3158	B11	3635	N10		
O	3170	A12	3636	M 6		
	3175	A15	3637	K12		
	3195	G11	3638	L12		
	3196	H14	4001	N11		
	3200	H 7	4005	H 8		

4007	B13
4009	B 8
4033	B17
4410	M22
4415	G12
4634	M 7
5118	D 5
5155	A 8
5157	A10
5170	A13
5175	A14
5190	G 8
5400	B17
5402	B16
5403	G12
5406	C21
5408	C21
5410	N22
6300	N21
6301	K12
6464	C24
6471	C 3
7103	E 4
7105	E 5
7125	C 8
7126	C 8
7200	H 8
7210	I 8
7233	I 12
7234	K13
7235	N 9
7330	N26
7335	C23
7337	C23
7338	B24
7350	H 3
7380	D26
7400	D14
7402	E14
7404	G14
7406	C16
7408	D20
7410	K23
7466	C26
7470	A 3
7471	B 3
7472	A 4
7473	B 4
7610	J11
7630	M13
7755	K15
9001	A 5
9033	J27
9034	K27
9035	K27
9036	K27
9045	E 2
9404	G13

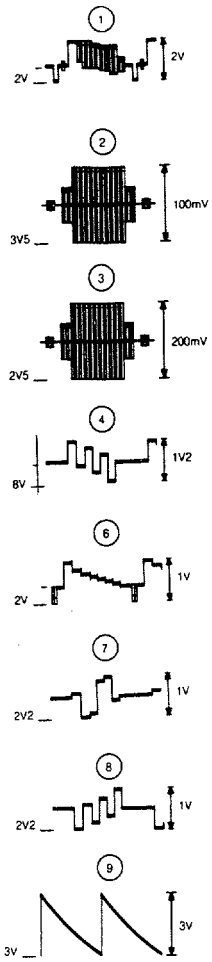

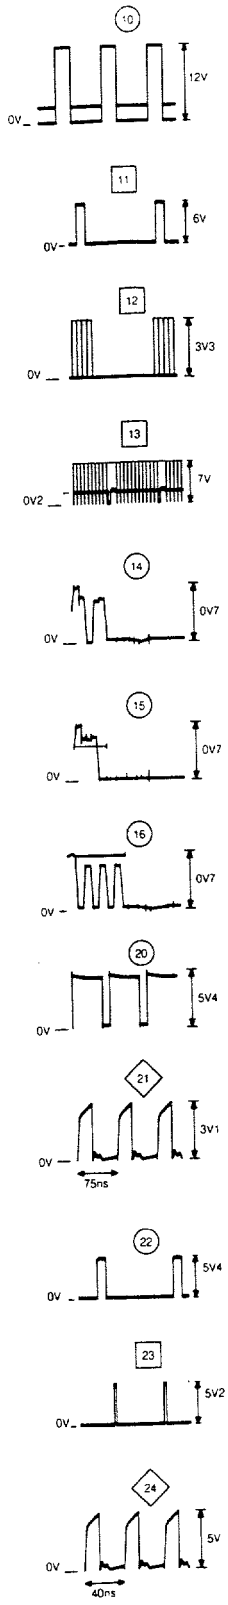

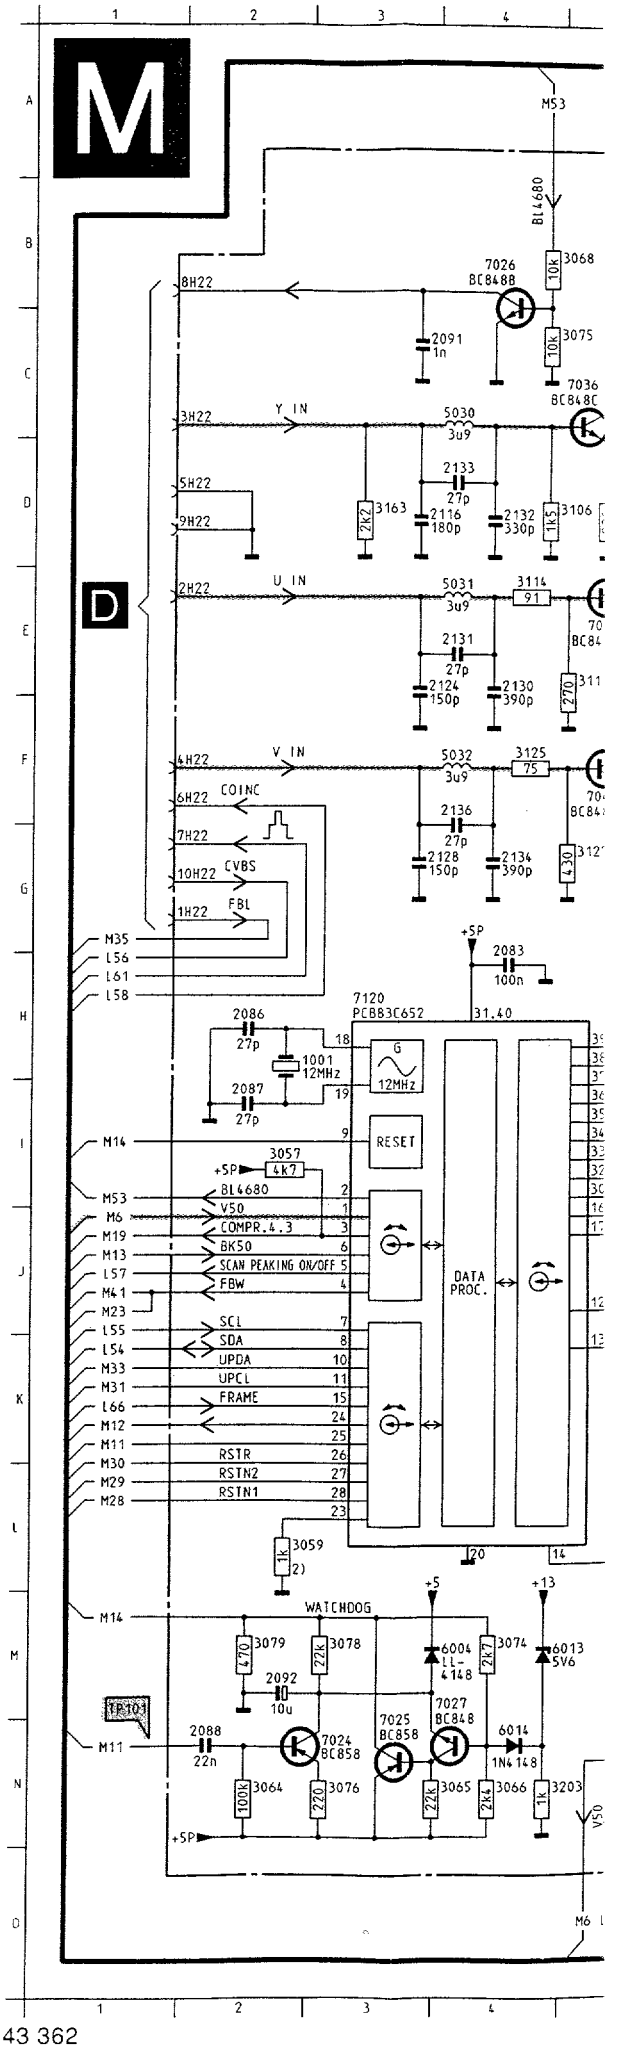
M
D
M53
BL4680
7026
BC848B
10k
3068
8H22
2091
1n
10k
3075
7036
BC848C
3H22
Y IN
5030
3u9
2133
27p
5H22
9H22
2K2
3163
2116
180p
2132
330p
1k5
3106
2H22
U IN
5031
3u9
3114
91
2131
27p
2124
150p
2130
390p
270
4H22
V IN
5032
3u9
3125
75
6H22
COINC
2136
27p
7H22
2128
150p
2134
390p
430
10H22
CVBS
1H22
FBL
M35
L56
L61
L58
+5P
2083
100n
7120
PCB83C652
31.40
2086
27p
1001
12MHz
2087
27p
G
12MHz
18
19
M14
9
RESET
3057
4k7
+5P
M53
BL4680
2
M6
V50
1
M19
COMPR.4.3
3
M13
BK50
6
L57
SCAN PEAKING ON/OFF
5
M41
FBW
4
M23
DATA
PROC.
L55
SCL
7
L54
SDA
8
M33
UPDA
10
M31
UPCL
11
L66
FRAME
15
M12
24
25
M11
M30
RSTR
26
M29
RSTN2
27
M28
RSTN1
28
23
1k
3059
2)
20
14
M14
WATCHDOG
+5
+13
470
3079
22k
3078
2092
10u
6004
LL-
4148
2k7
3074
6013
5V6
TP10
M11
2088
22n
7024
BC858
7025
BC858
7027
BC848
6014
1N4148
100k
3064
220
3076
22k
3065
2k2
3066
1k
3203
+5P
VSO
M6

LFR box

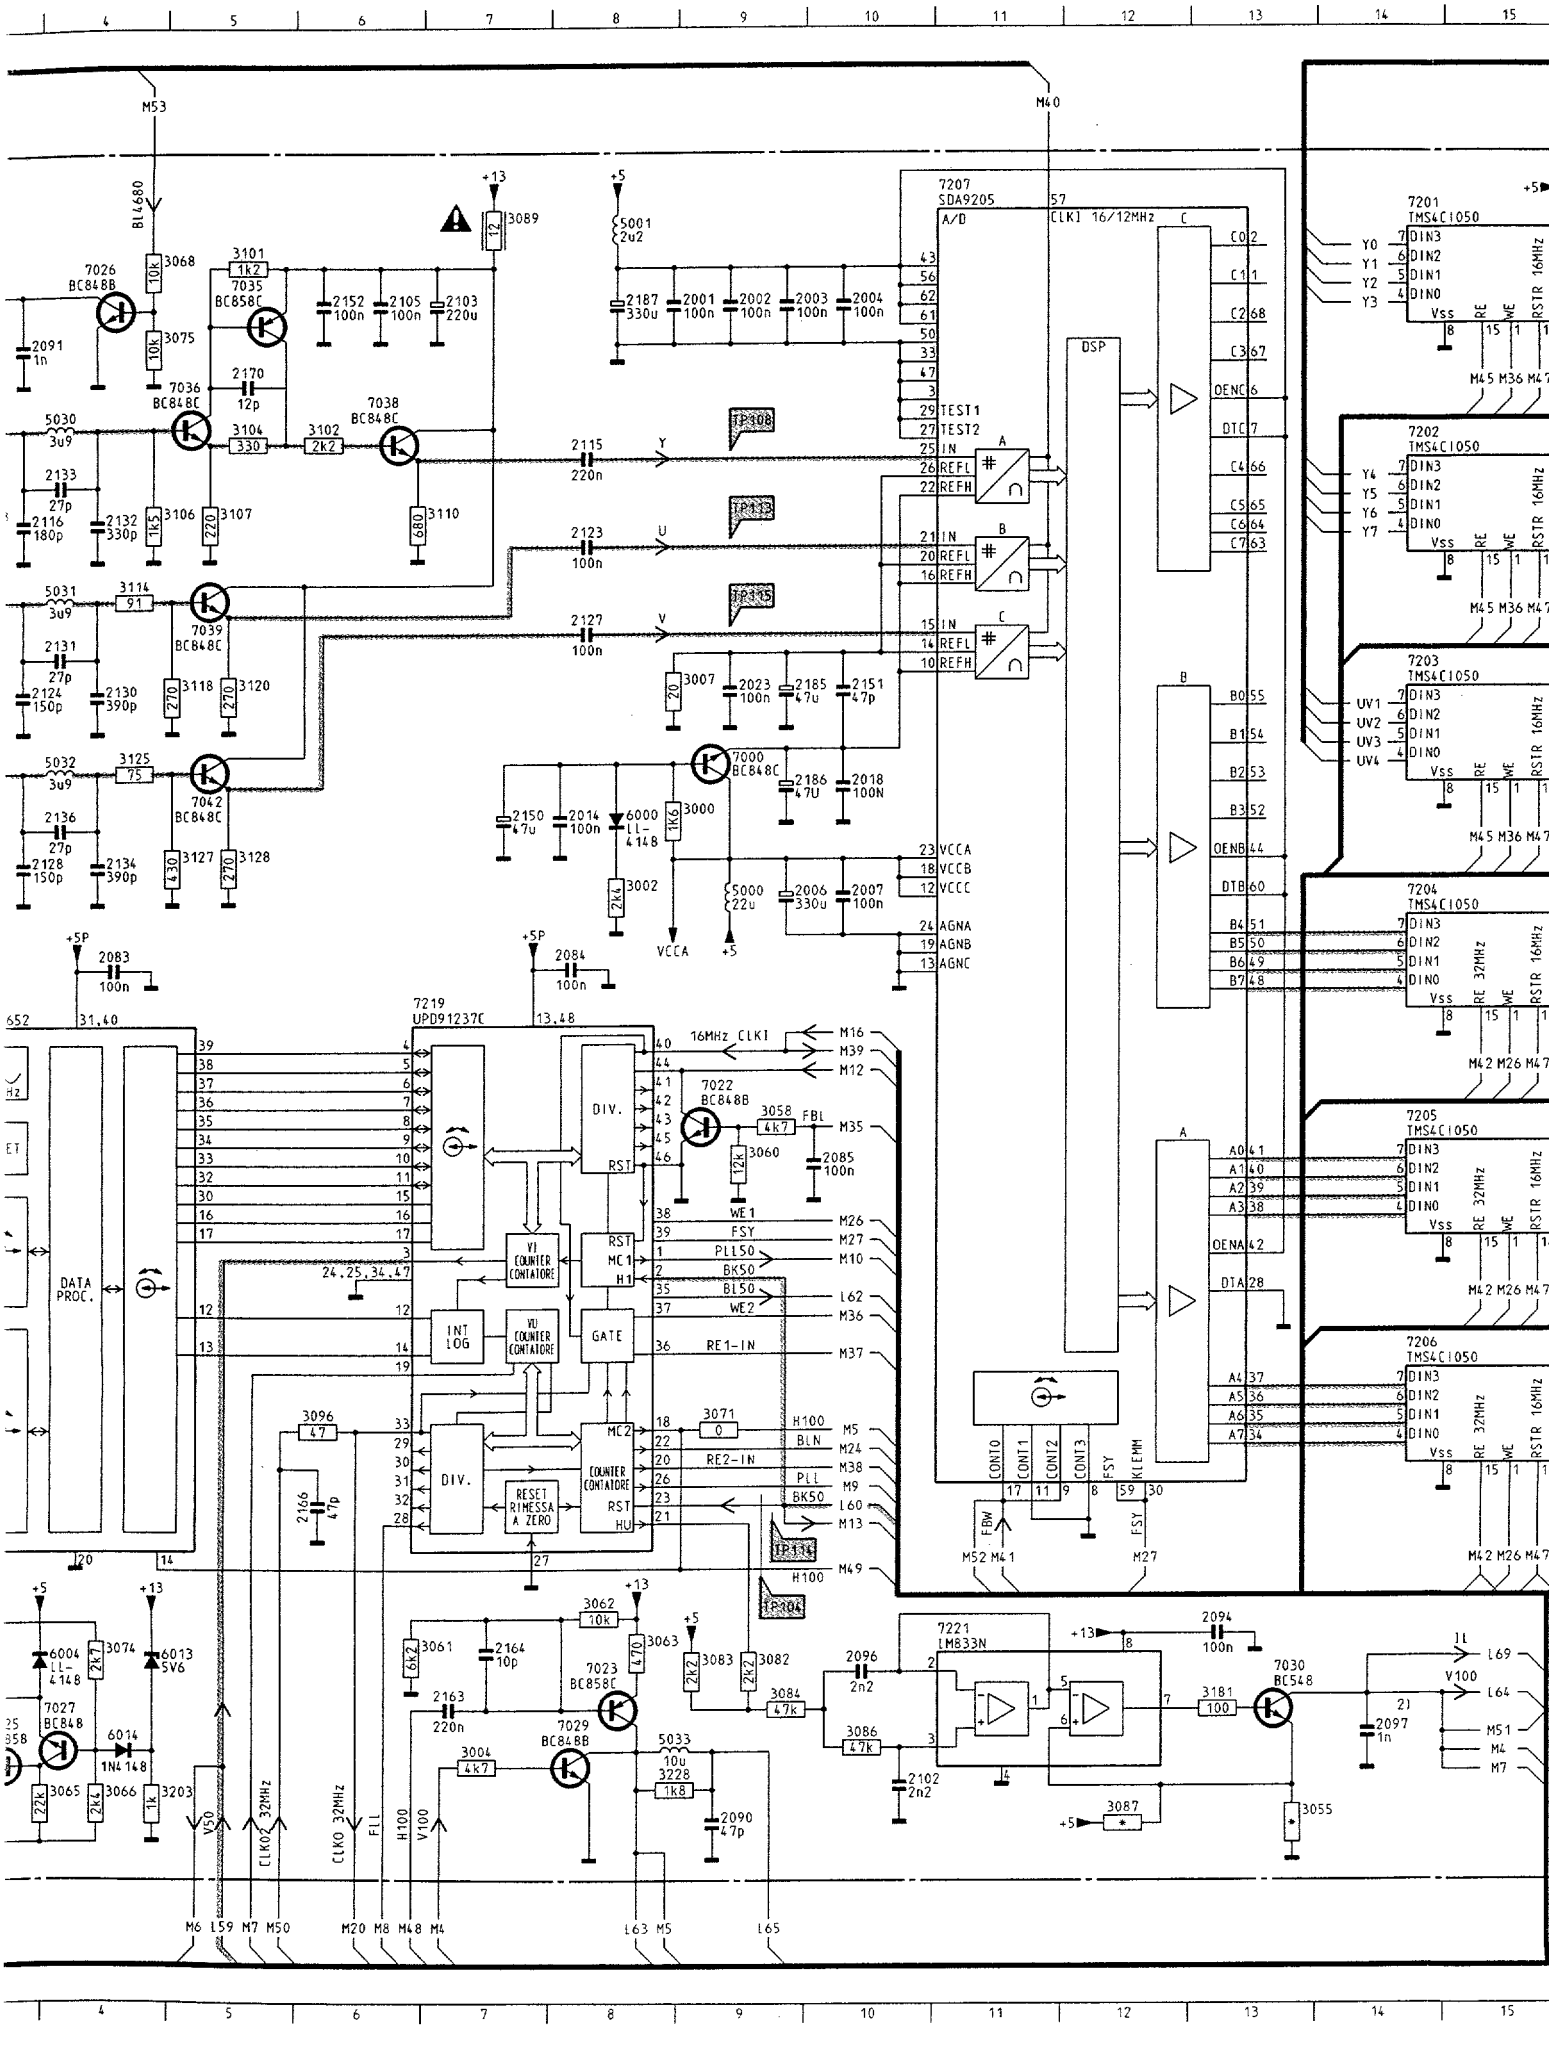
7207
SDA9205
A/D
CLK1 16/12MHz
DSP
7219
UPD91237C
DATA PROC.
DIV.
INT LOG
GATE
COUNTER CONTATORE
RESET RIMESSA A ZERO
7201
TMS4C1050
7202
TMS4C1050
7203
TMS4C1050
7204
TMS4C1050
7205
TMS4C1050
7206
TMS4C1050
7221
LM833N
7000
BC848C
7022
BC848B
7023
BC858C
7026
BC848B
7027
BC848
7029
BC848B
7030
BC548
7035
BC858C
7036
BC848C
7038
BC848C
7039
BC848C
7042
BC848C
16MHz CLK1
VCCA
AGNA
AGNB
AGNC
TEST1
TEST2
CLKO 32MHz
FBL
RE1-IN
RE2-IN
PLL
BLN
H100
V100
FSY
FBW

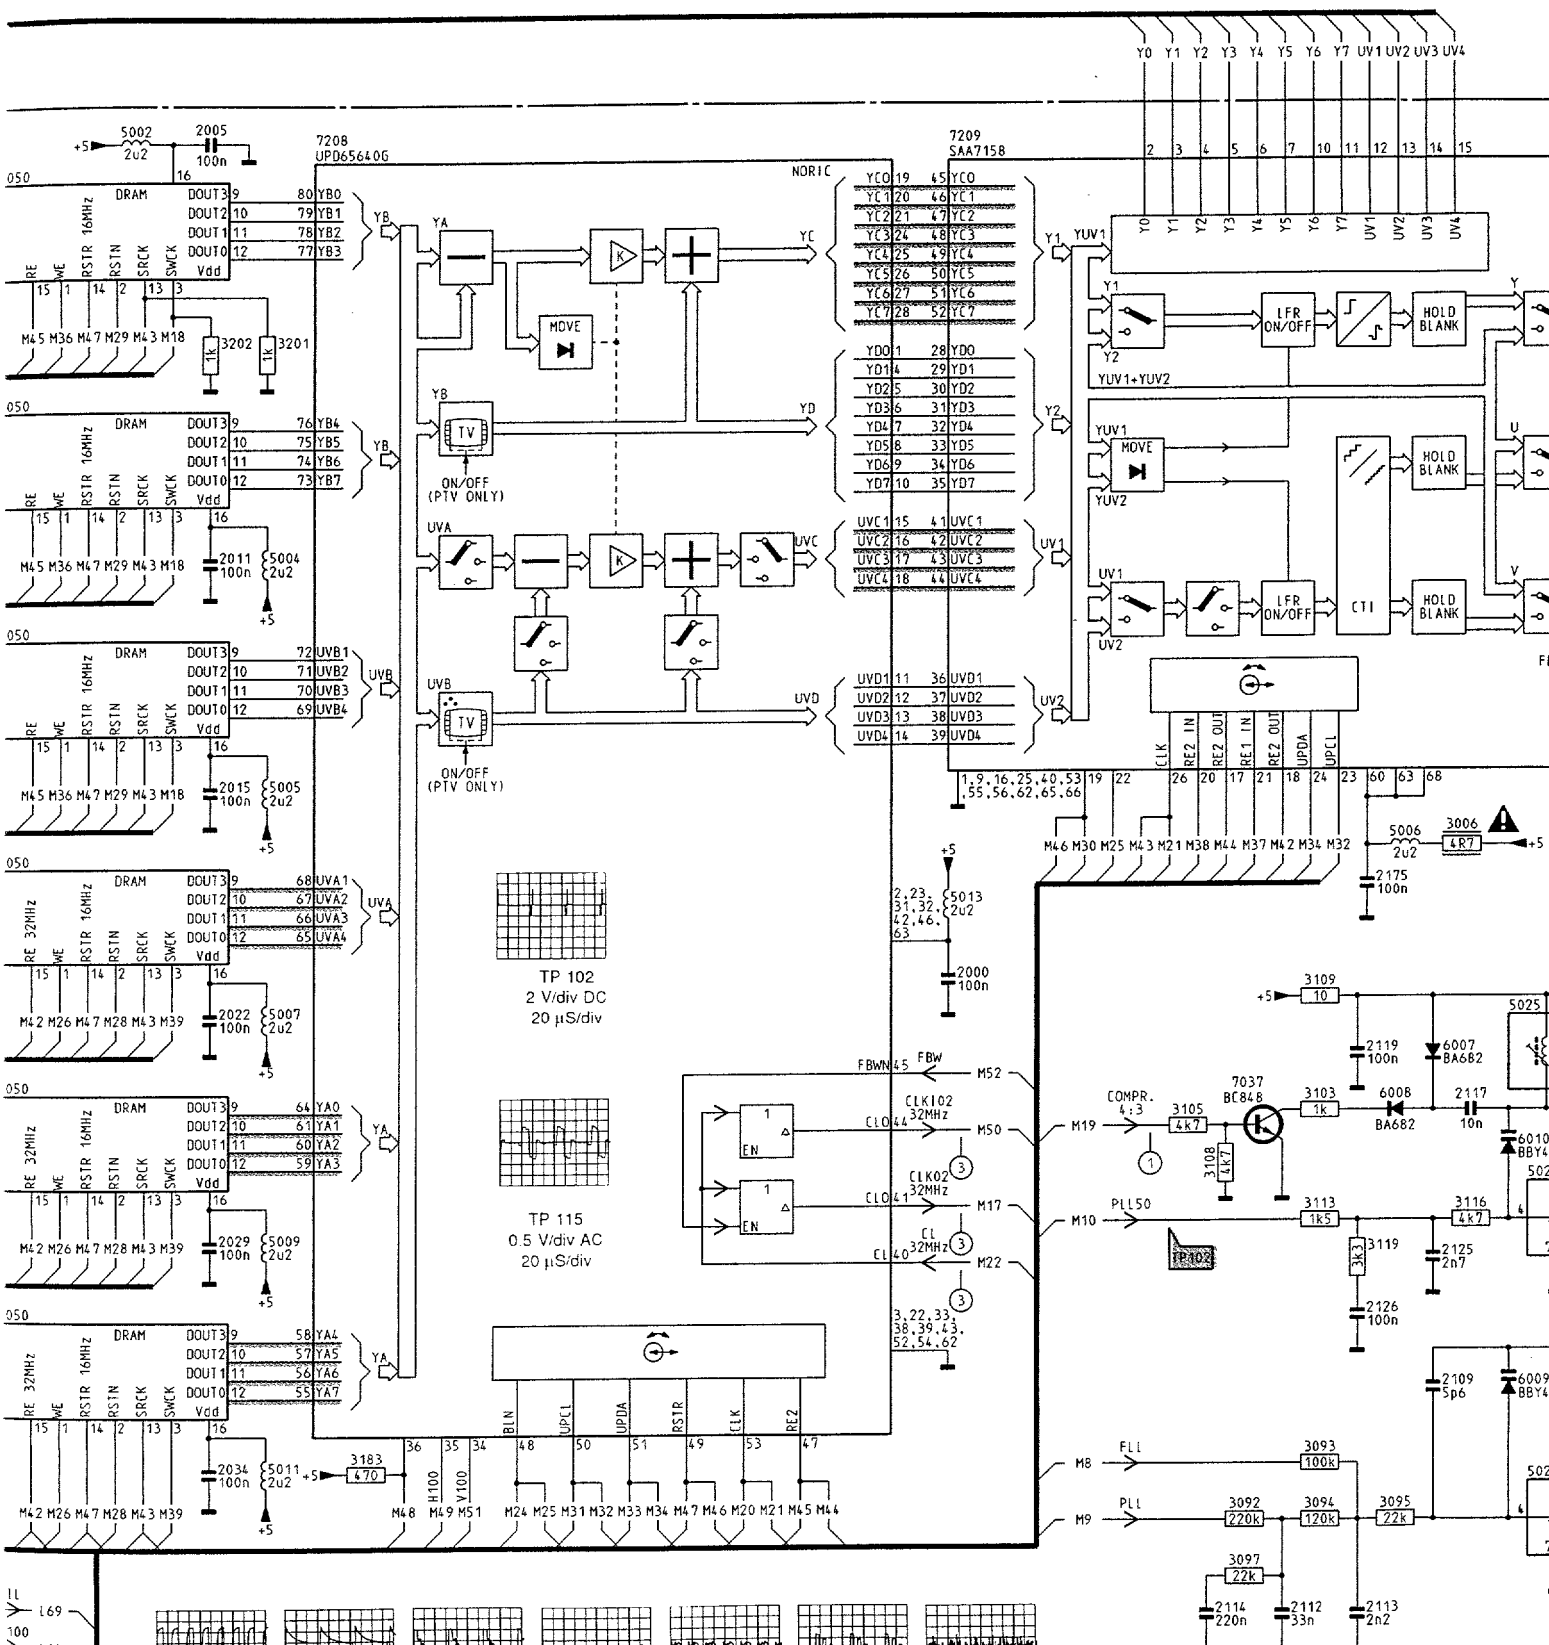

TP 102
2 V/div DC
20 µS/div

TP 115
0.5 V/div AC
20 µS/div

TP 101
2 V/div DC
10 mS/div

TP 104
2 V/div DC
20 µS/div

TP 108
0.5 V/div AC
20 µS/div

TP 109
20 mV/div DC
20 µS/div

TP 110
50 mV/div AC
20 µS/div

TP 113
0.5 V/div DC
20 µS/div

TP 111
0,5 V/div AC
20 µS/div

*	3055	30
4:3	180	15
16:9 & PTV	220	47
16:9 36"	200	18

LFR box

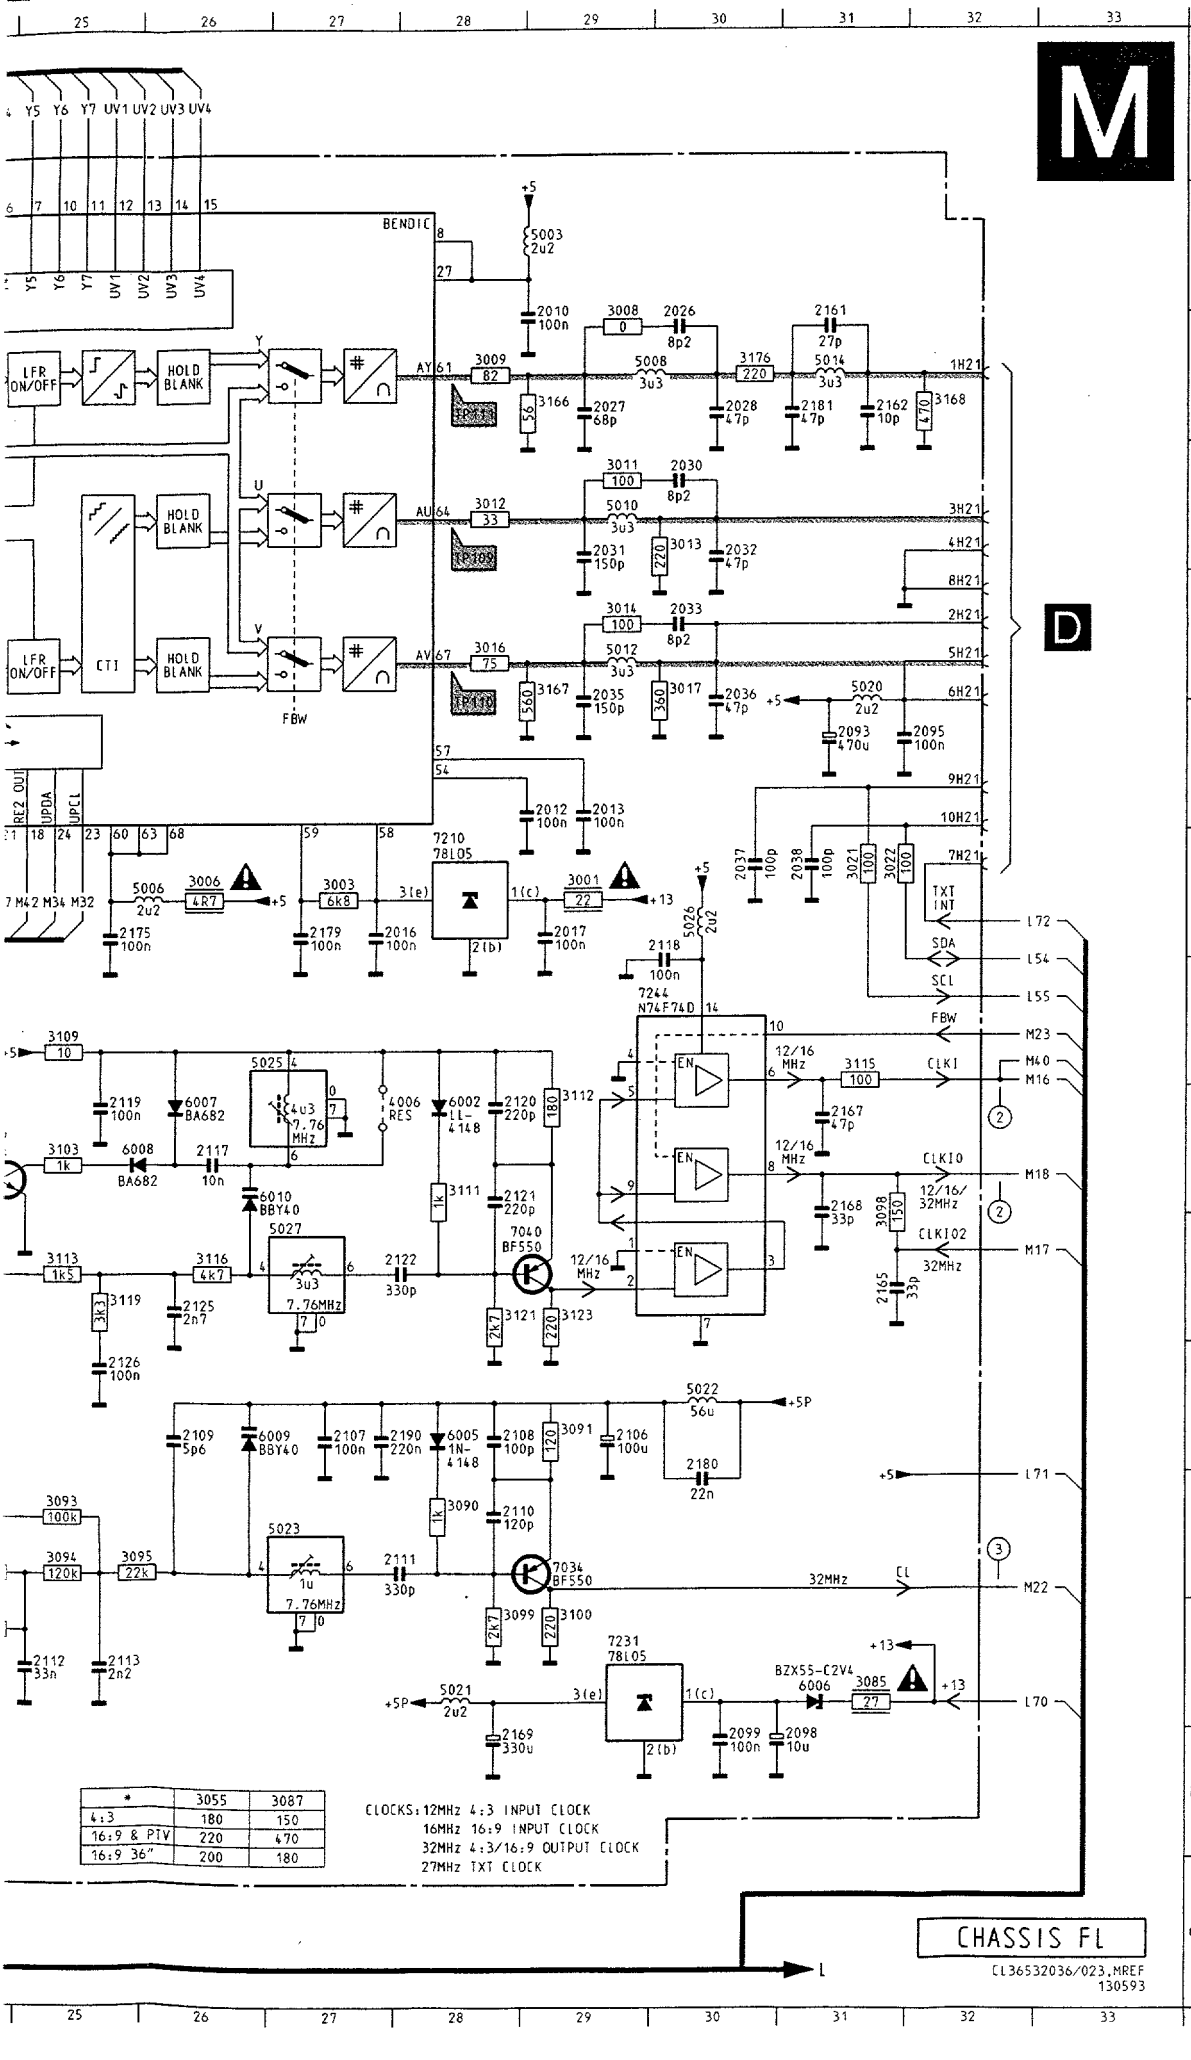

*	3055	3087
4:3	180	150
16:9 & PIV	220	470
16:9 36"	200	180

CLOCKS: 12MHz 4:3 INPUT CLOCK
16MHz 16:9 INPUT CLOCK
32MHz 4:3/16:9 OUTPUT CLOCK
27MHz TXT CLOCK

	1001	H 2	3021	G31	7027	M 4
	2000	H22	3022	G31	7029	N 8
	2001	B 9	3055	N13	7030	M13
	2002	B 9	3057	I 2	7034	L29
A	2003	B 9	3058	I 9	7035	B 5
	2004	B10	3059	L 2	7036	C 5
	2005	B16	3060	I 9	7037	I24
	2006	G 9	3061	M 6	7038	C 6
	2007	G10	3062	M 8	7039	E 5
	2010	C29	3063	M 8	7040	J29
	2011	E16	3064	N 2	7042	F 5
	2012	F29	3065	N 4	7120	H 3
B	2013	F29	3066	N 4	7201	B14
	2014	F 8	3068	B 4	7202	D14
	2015	G16	3071	K 9	7203	E14
	2016	G27	3074	M 4	7204	G14
	2017	G29	3075	C 4	7205	I14
	2018	F10	3076	N 3	7206	K14
	2022	H16	3078	M 3	7207	B11
	2023	E 9	3079	M 2	7208	B17
C	2026	C30	3082	M 9	7209	B22
	2027	C29	3083	M 9	7210	G28
	2028	C30	3084	M 9	7219	H 6
	2029	J16	3085	M31	7221	M11
	2030	D30	3086	N10	7231	M29
	2031	D29	3087	N12	7244	H29
	2032	D30	3089	B 7		
D	2033	E30	3090	L28		
	2034	L16	3091	K29		
	2035	F29	3092	L24		
	2036	F30	3093	L25		
	2037	G30	3094	L25		
	2038	G31	3095	L25		
	2083	H 4	3096	K 6		
	2084	H 8	3097	M24		
E	2085	I10	3098	I31		
	2086	H 2	3099	M28		
	2087	I 2	3100	M29		
	2088	N 2	3101	B 5		
	2090	N 9	3102	C 6		
	2091	C 3	3103	I25		
	2092	M 2	3104	C 5		
F	2093	F31	3105	I24		
	2094	M13	3106	D 4		
	2095	F32	3107	D 5		
	2096	M10	3108	J24		
	2097	N14	3109	H25		
	2098	N31	3110	D 7		
	2099	N30	3111	I28		
	2102	N10	3112	I29		
G	2103	B 7	3113	J25		
	2105	B 6	3114	E 4		
	2106	K29	3115	H31		
	2107	K27	3116	J26		
	2108	K28	3118	E 5		
	2109	K26	3119	J25		
	2110	L28	3120	E 5		
	2111	L28	3121	J28		
H	2112	M25	3123	J29		
	2113	M25	3125	F 4		
	2114	M24	3127	G 5		
	2115	D 8	3128	G 5		
	2116	D 3	3163	D 3		
	2117	I26	3166	C29		
	2118	G30	3167	E29		
I	2119	I25	3168	C32		
	2120	I28	3176	C30		
	2121	I28	3181	M13		
	2122	J28	3183	L17		
	2123	D 8	3201	C17		
	2124	E 3	3202	C16		
	2125	J26	3203	N 4		
	2126	K25	3228	N 8		
J	2127	E 8	4006	I27		
	2128	G 3	5000	G 9		
	2130	E 4	5001	B 8		
	2131	E 4	5002	B16		
	2132	D 4	5003	B29		
	2133	D 4	5004	E17		
	2134	G 4	5005	G17		
K	2136	F 4	5006	G26		
	2150	F 7	5007	H17		
	2151	E10	5008	C29		
	2152	B 6	5009	J17		
	2161	C31	5010	D29		
	2162	C31	5011	L17		
	2163	M 7	5012	E29		
	2164	M 7	5013	G22		
L	2165	J31	5014	C31		
	2166	L 6	5020	E31		
	2167	I31	5021	M28		
	2169	N28	5022	K30		
	2170	C 5	5023	L27		
	2175	G25	5025	H26		
	2179	G27	5026	G30		
M	2180	K30	5027	J27		
	2181	C31	5030	C 4		
	2185	E 9	5031	E 4		
	2186	F 9	5032	F 4		
	2187	B 8	5033	N 8		
	2190	K27	6000	F 8		
	3000	F 9	6002	I28		
	3001	G29	6004	M 4		
N	3002	G 8	6006	M31		
	3003	G27	6007	I26		
	3004	N 7	6008	I25		
	3006	G26	6009	K26		
	3007	E 9	6010	I26		
	3008	C29	6013	M 4		
	3009	C28	6014	N 4		
	3011	D29	7000	F 9		
O	3012	D28	7022	I 9		
	3013	D30	7023	M 8		
	3014	E29	7024	N 3		
	3016	E28	7025	N 3		
	3017	E30	7026	B 4		

LFR Box

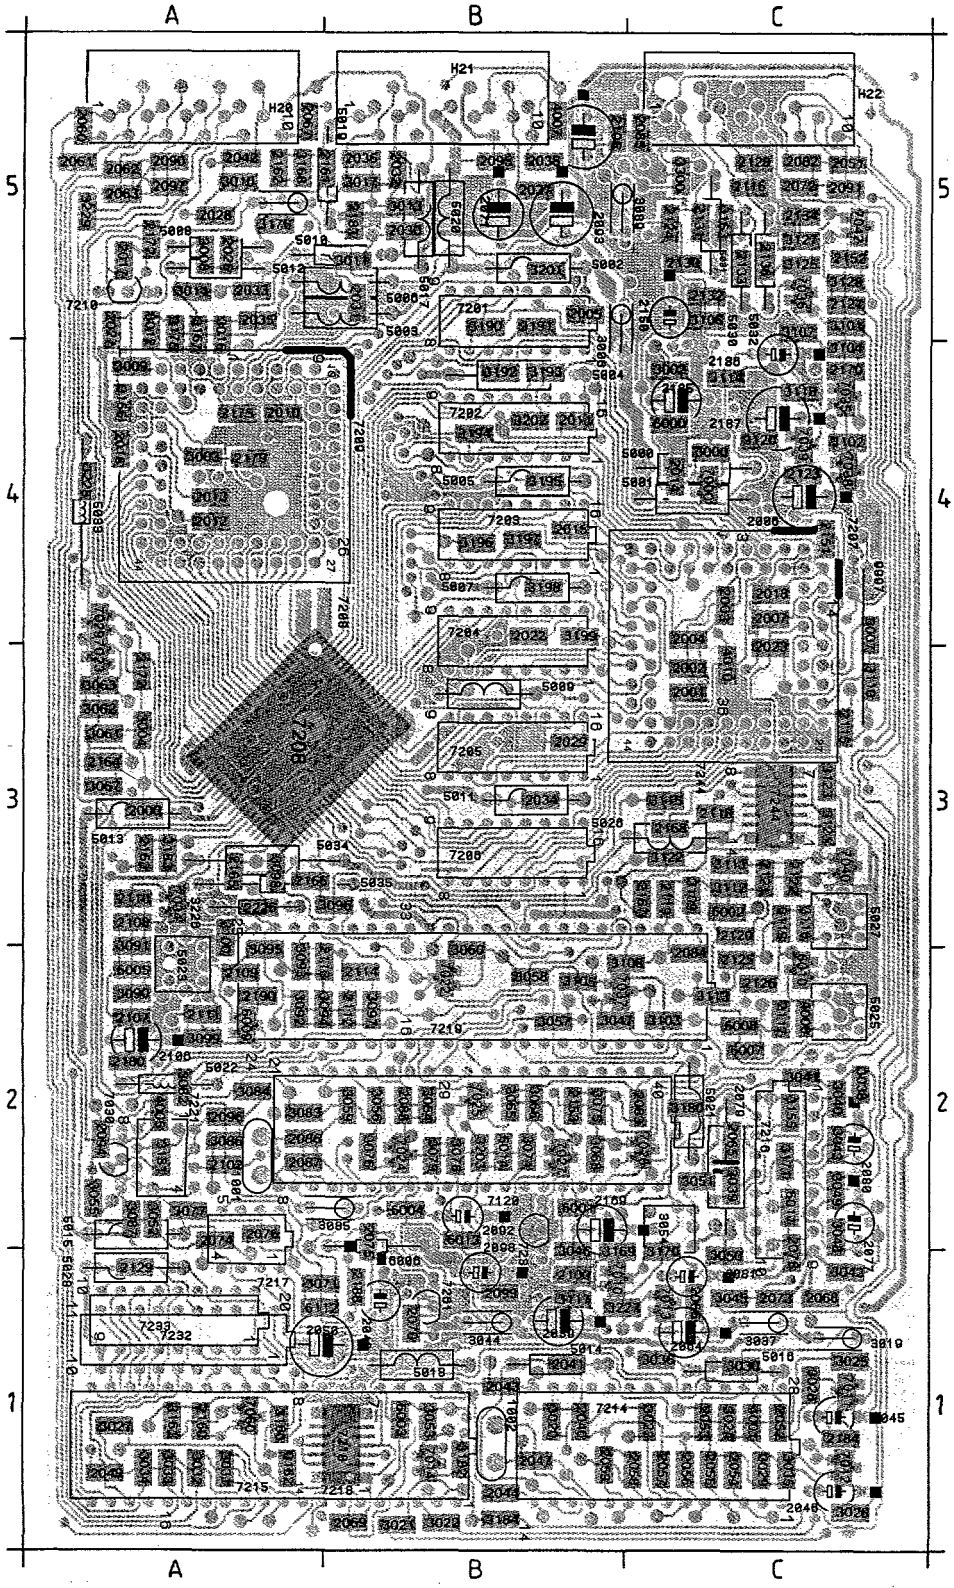

H20	A5	2013	A4	2034	B3	2050	A1	2067	A5	2083	C2	2100	B1	2118	C3	2134	C5	2170	C4
H21	B5	2014	C4	2035	A5	2051	C5	2068	C1	2084	C2	2102	A2	2119	C3	2136	C5	2172	A5
H22	C5	2015	B4	2036	B5	2052	C1	2069	B1	2085	C5	2103	B5	2120	C3	2150	C5	2175	A4
1001	A2	2016	A4	2037	B5	2053	C1	2070	B1	2086	A2	2105	B5	2121	C3	2151	C4	2179	A4
1002	B1	2017	A5	2038	B5	2054	C1	2071	B5	2087	A2	2106	A2	2122	C3	2152	C5	2180	A2
2000	A3	2018	C4	2039	B1	2055	C1	2072	C5	2088	B2	2107	A2	2123	C4	2153	B2	2181	B5
2001	C3	2022	B4	2040	B1	2056	C1	2073	C1	2090	A5	2108	A3	2124	C5	2160	A1	2184	C1
2002	C3	2023	C4	2041	B1	2057	C1	2074	A2	2091	C5	2109	A2	2125	C2	2161	A5	2185	C4
2003	C4	2026	A5	2042	A5	2058	C1	2075	B2	2092	B2	2110	A3	2126	C2	2162	A5	2186	C4
2004	C4	2027	A5	2043	B1	2059	B1	2076	A2	2093	B5	2111	A2	2127	C5	2163	A3	2187	C4
2005	B5	2028	A5	2044	B1	2060	A5	2077	C2	2094	A2	2112	B2	2128	C5	2164	A3	2188	B1
2006	C4	2029	B3	2045	C1	2062	A5	2078	C1	2095	B5	2113	A2	2129	A1	2165	A3	2190	A2
2007	C4	2030	B5	2046	C1	2063	A5	2079	C2	2096	A2	2114	B2	2130	C5	2166	A3	2226	A3
2010	A4	2031	B5	2047	B1	2064	C1	2080	C2	2097	A5	2115	C3	2131	C5	2167	C3	3000	C4
2011	B4	2032	B5	2048	B1	2065	C2	2081	C1	2098	B1	2116	C5	2132	C5	2168	C3	3001	A5
2012	A4	2033	A5	2049	A1	2066	C1	2082	C5	2099	B1	2117	C2	2133	C5	2169	B2	3002	C4

3003	A4	3031	A1	3061	A3	3092	A2	3122	C3	3152	C2	3182	B1	3212	B4	3242	C5	5000	C4
3004	A3	3032	A1	3062	A3	3093	A2	3123	C3	3155	C2	3183	A3	3213	B4	3243	C5	5001	C4
3006	B5	3033	A1	3063	A3	3094	A2	3125	C5	3160	A1	3184	B1	3214	B4	3244	C5	5002	B5
3007	C4	3034	A1	3064	B2	3095	A2	3127	C5	3161	A1	3190	B5	3215	B4	3245	C5	5003	B5
3008	A5	3035	C1	3065	B2	3096	B3	3128	C5	3162	A1	3191	B5	3216	B4	3246	C5	5004	B4
3009	A4	3036	C1	3066	B2	3097	B2	3129	C5	3163	C5	3192	B4	3217	B4	3247	C5	5005	B4
3010	A5	3037	C2	3067	A3	3098	A3	3130	C5	3166	A4	3193	B4	3218	B4	3248	C5	5006	B5
3011	B5	3038	C2	3068	B2	3099	A2	3131	C5	3167	A5	3194	B4	3219	B4	3249	C5	5007	B4
3012	A5	3039	C2	3071	A1	3100	A3	3132	C5	3168	A5	3195	B4	3220	B4	3250	C5	5008	A5
3013	B5	3040	C2	3074	B2	3101	C5	3133	C5	3169	B1	3196	B4	3221	B4	3251	C5	5009	B3
3014	A5	3041	C2	3075	B2	3102	C4	3134	C5	3170	C1	3197	B4	3222	B4	3252	C5	5010	B5
3016	A5	3042	C1	3076	B2	3103	C2	3135	C5	3171	C2	3198	B4	3223	B4	3253	C5	5011	B3
3017	B5	3043	C2	3077	A2	3104	C4	3136	C5	3172	A3	3199	B4	3224	B4	3254	C5	5012	A5
3019	C1	3044	B1	3078	B2	3105	B2	3137	C5	3175	A5	3201	B5	3225	B4	3255	C5	5013	A3
3020	B1	3045	C1	3079	B2	3106	C5	3138	C5	3176	A5	3202	B4	3226	B4	3256	C5	5014	B1
3021	B1	3046	B1	3082	A2	3107	C5	3139	C5	3180	C2	3203	B2	3227	B4	3257	C5	5015	A2
3022	B1	3047	B2	3083	A2	3108	B2	3140	C5	3181	A2	3204	B2	3228	B4	3258	C5	5016	C1
3023	C1	3048	C2	3084	A2	3109	C3	3141	C5	3182	B1	3205	B2	3229	B4	3259	C5	5017	B5
3024	C1	3049	C2	3085	B2	3110	C3	3142	C5	3183	A3	3206	B2	3230	B4	3260	C5	5018	B1
3025	C1	3050	C1	3086	A2	3111	C3	3143	C5	3184	B1	3207	B2	3231	B4	3261	C5	5019	B5
3026	C1	3051	C2	3087	A2	3112	C3	3144	C5	3185	B1	3208	B2	3232	B4	3262	C5	5020	B5
3027	A1	3052	A2	3089	B5	3113	C2	3145	C5	3186	B1	3209	B2	3233	B4	3263	C5	5021	C2
3028	C1	3053	B1	3090	A2	3114	C4	3146	C5	3187	B1	3210	B2	3234	B4	3264	C5	5022	A2
3029	C1	3054	C2	3091	A3	3115	C3	3147	C5	3188	B1	3211	B2	3235	B4	3265	C5	5023	A2
3030	C1	3055	A2			3116	C3	3148	C5	3189	B1							5025	C2
		3056	B2			3117	B1	3149	C5									5026	C3
		3057	B2			3118	C4	3150	C5									5027	C3
		3058	B2			3119	C3	3151	C5									5028	A1
		3059	B2			3120	C4											5030	C5
		3060	B2			3121	C3											5031	C5
																		5032	C5
																		5033	A4
																		5034	A3
																		5035	A3
																		6000	C4
																		6001	B2
																		6002	C3
																		6003	B1
																		6004	B2
																		6005	A2
																		6006	B2
																		6007	C2
																		6008	C2
																		6009	A2
																		6010	C2
																		6011	C2
																		6013	B2
																		6014	B2
																		6112	A1
																		7000	C4
																		7010	B1
																		7011	C1
																		7012	C1
																		7013	C1
																		7014	B1
																		7022	B2
																		7023	A3
																		7024	B2
																		7025	B2
																		7026	C2
																		7027	B2
																		7029	A4
																		7030	A2
																		7034	A3
																		7035	C4
																		7036	C5
																		7037	B2
																		7038	C4
																		7039	C4
																		7040	C3
																		7042	C5
																		7060	A1
																		7120	B2
																		7201	B5
																		7202	B4
																		7203	B4
																		7204	B4
																		7205	B3
																		7206	B3
																		7207	C4
																		7208	A3
																		7209	A4
																		7210	A5
																		7214	C1
																		7215	A1
																		7216	C2
																		7217	A2
																		7218	B1
																		7219	B2
																		7221	A2
																		7231	B2
																		7232	A1
																		7233	A1
																		7244	C3
																		7261	B1
																		9997	C4

LFR Box

LFR BOX TXT-DECODER
DECODEUR TXT
DECODIFICATORE TELEVIDEO



TP 100
2 V/div AC
20 µS/div



TP 103
0.5 V/div AC
2 µS/div



TP 114
2 V/div DC
20 µS/div



TP 116
5 V/div AC
20 µS/div

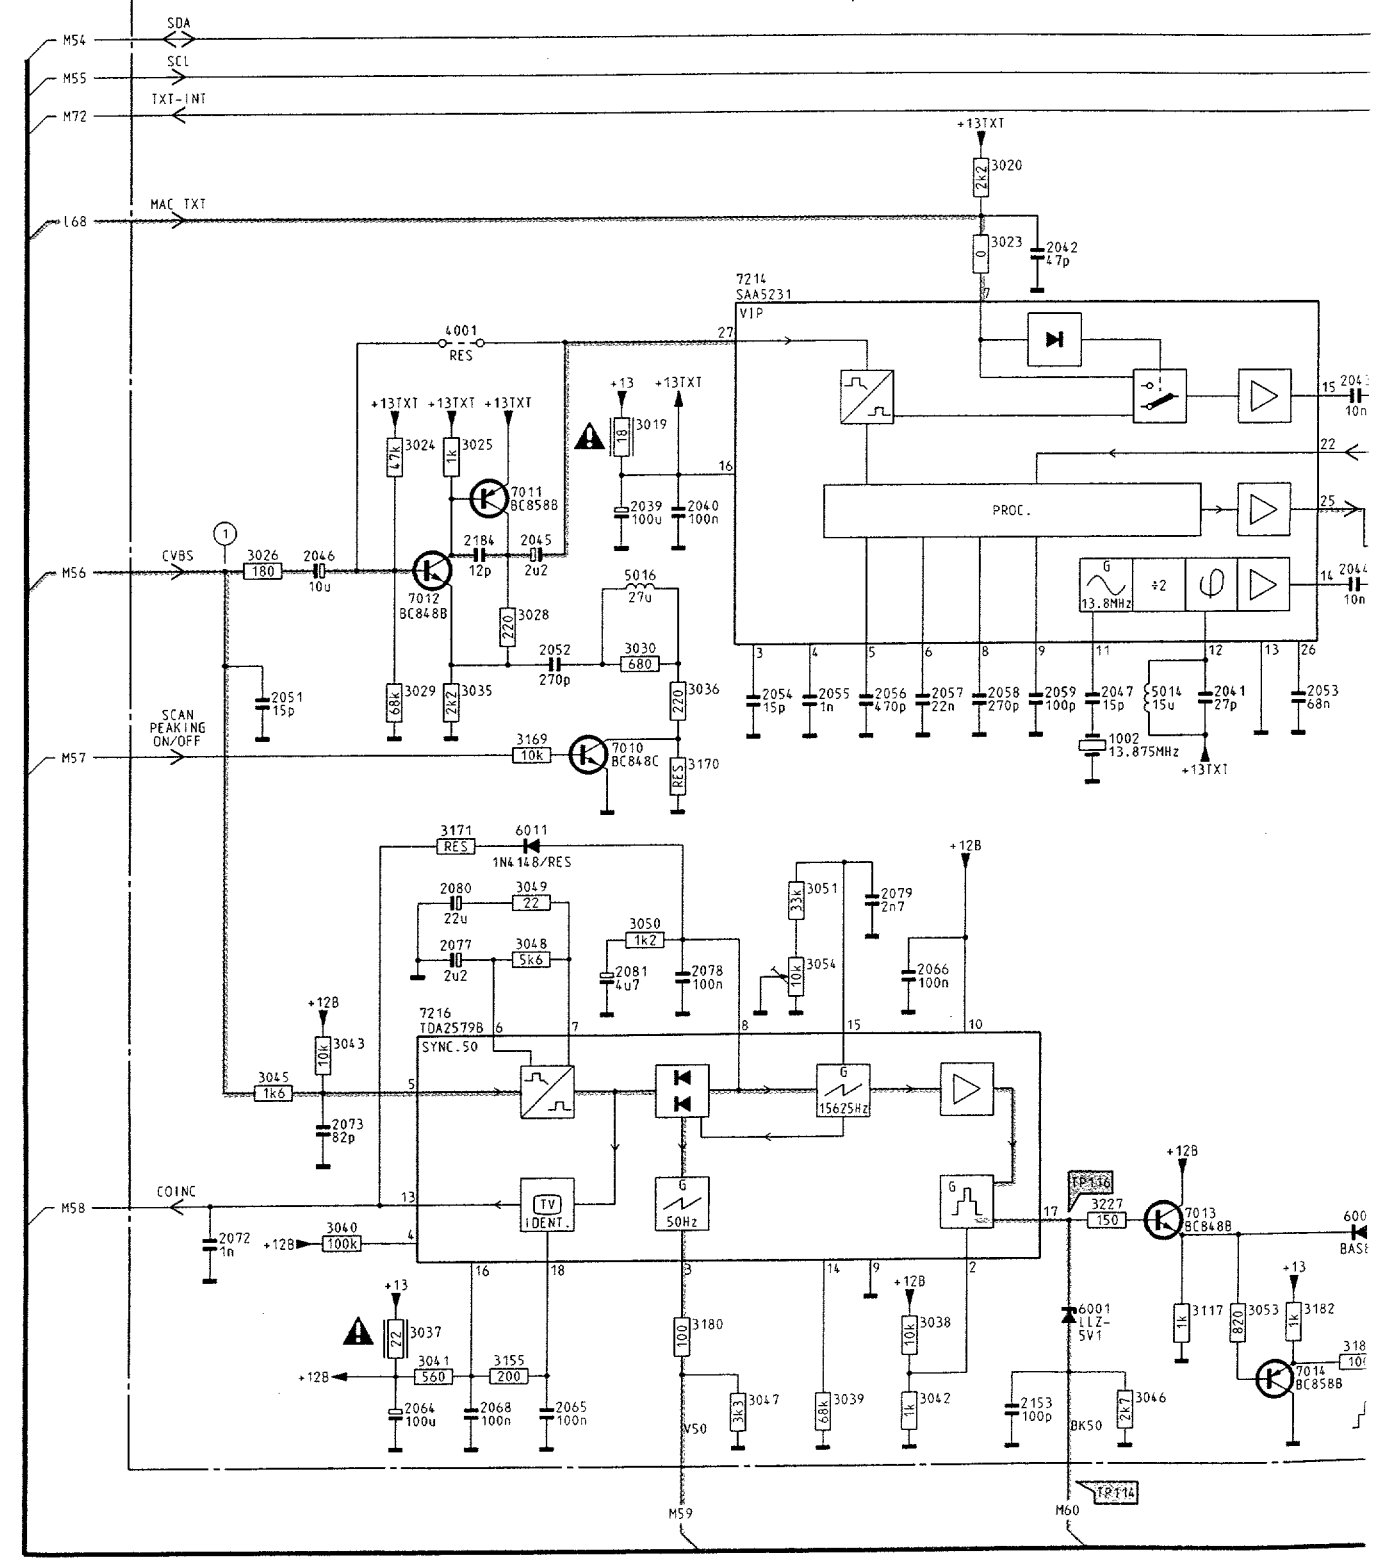

LFR Box

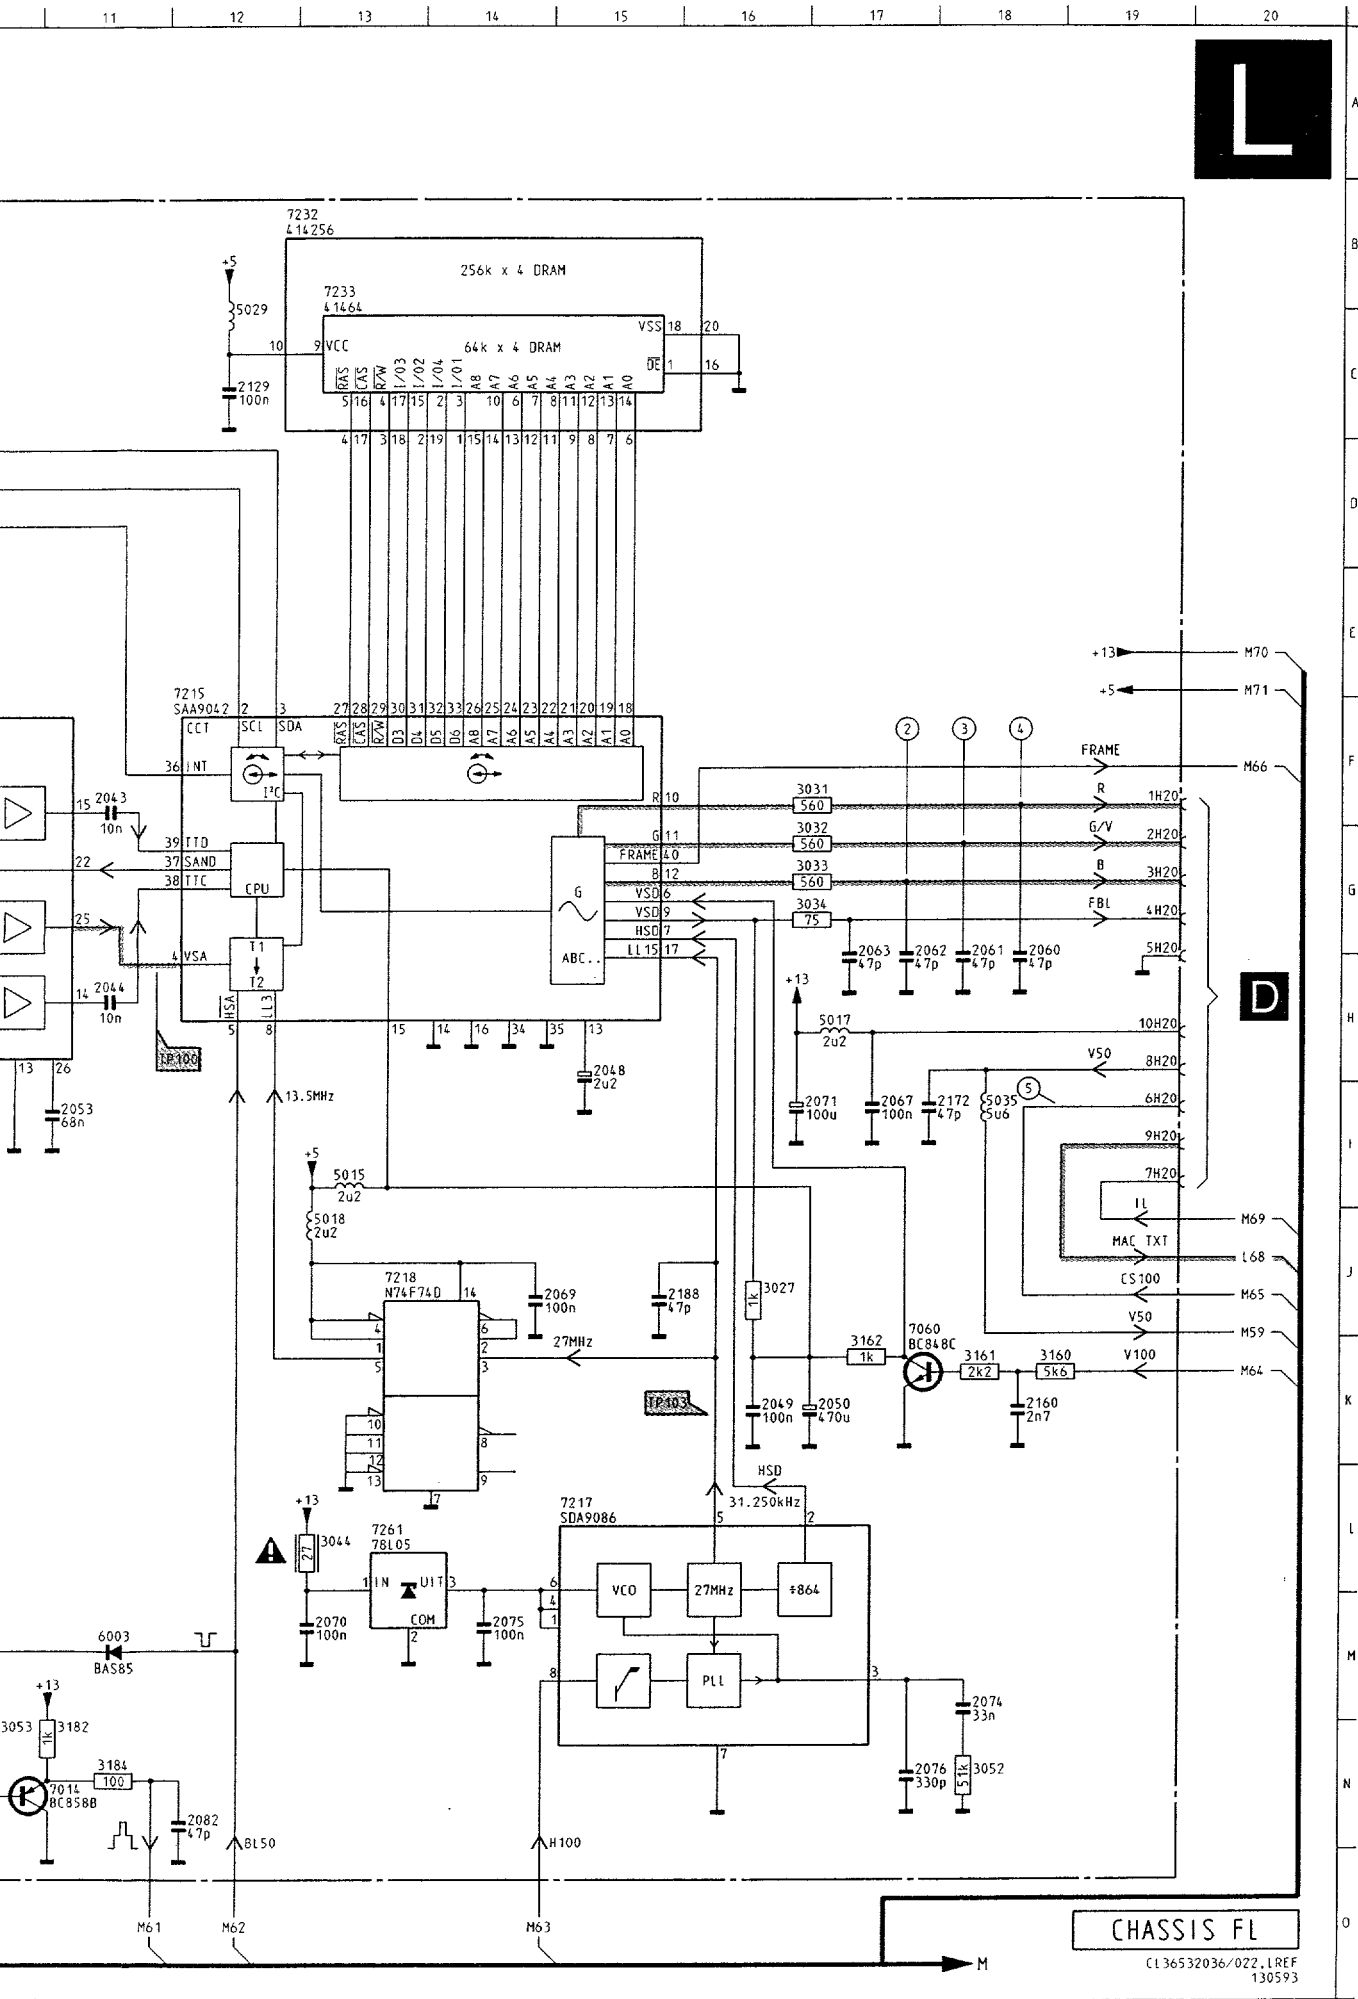
L
D
7232
414256
256k x 4 DRAM
7233
41464
64k x 4 DRAM
7215
SAA9042
CPU
7218
N74F74D
7217
SDA9086
7261
78L05
7060
BC848C
7014
BC858B
6003
BAS85
CHASSIS FL
CL36532036/022.LREF
130593
PCS 43 363

100 Hz / TXT

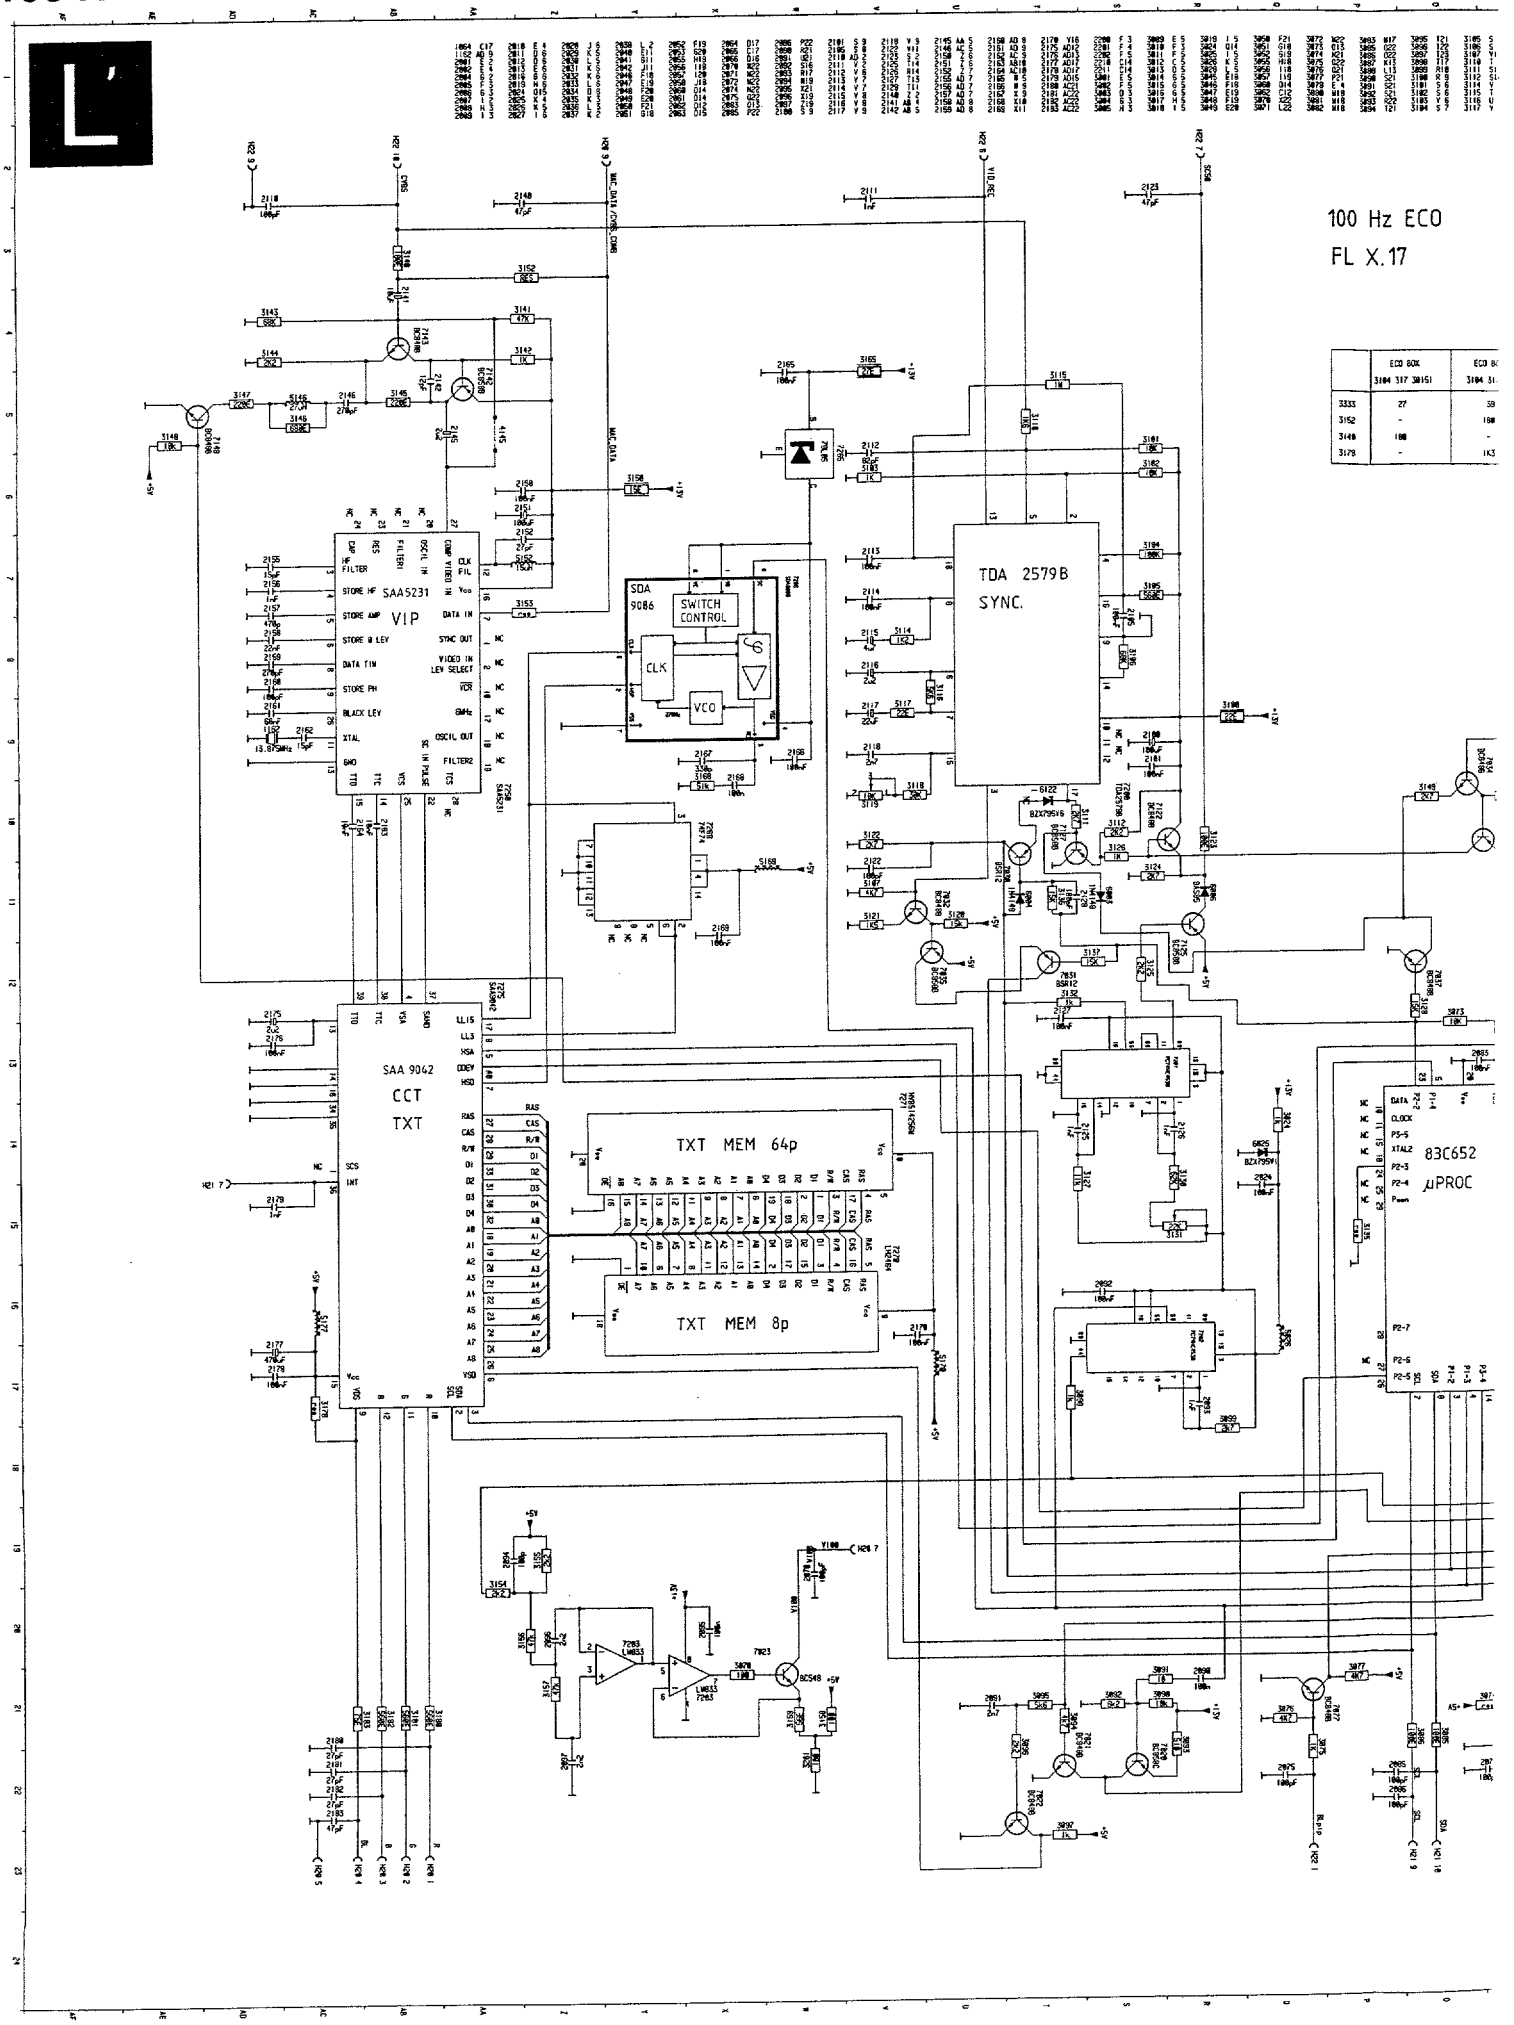
100 Hz ECO
FL X.17
TDA 2579B
SYNC.
SAA5231
VIP
SAA 9042
CCT
TXT
TXT MEM 64p
TXT MEM 8p
SDA
9086
SWITCH
CONTROL
CLK
VCO
83C652
µPROC

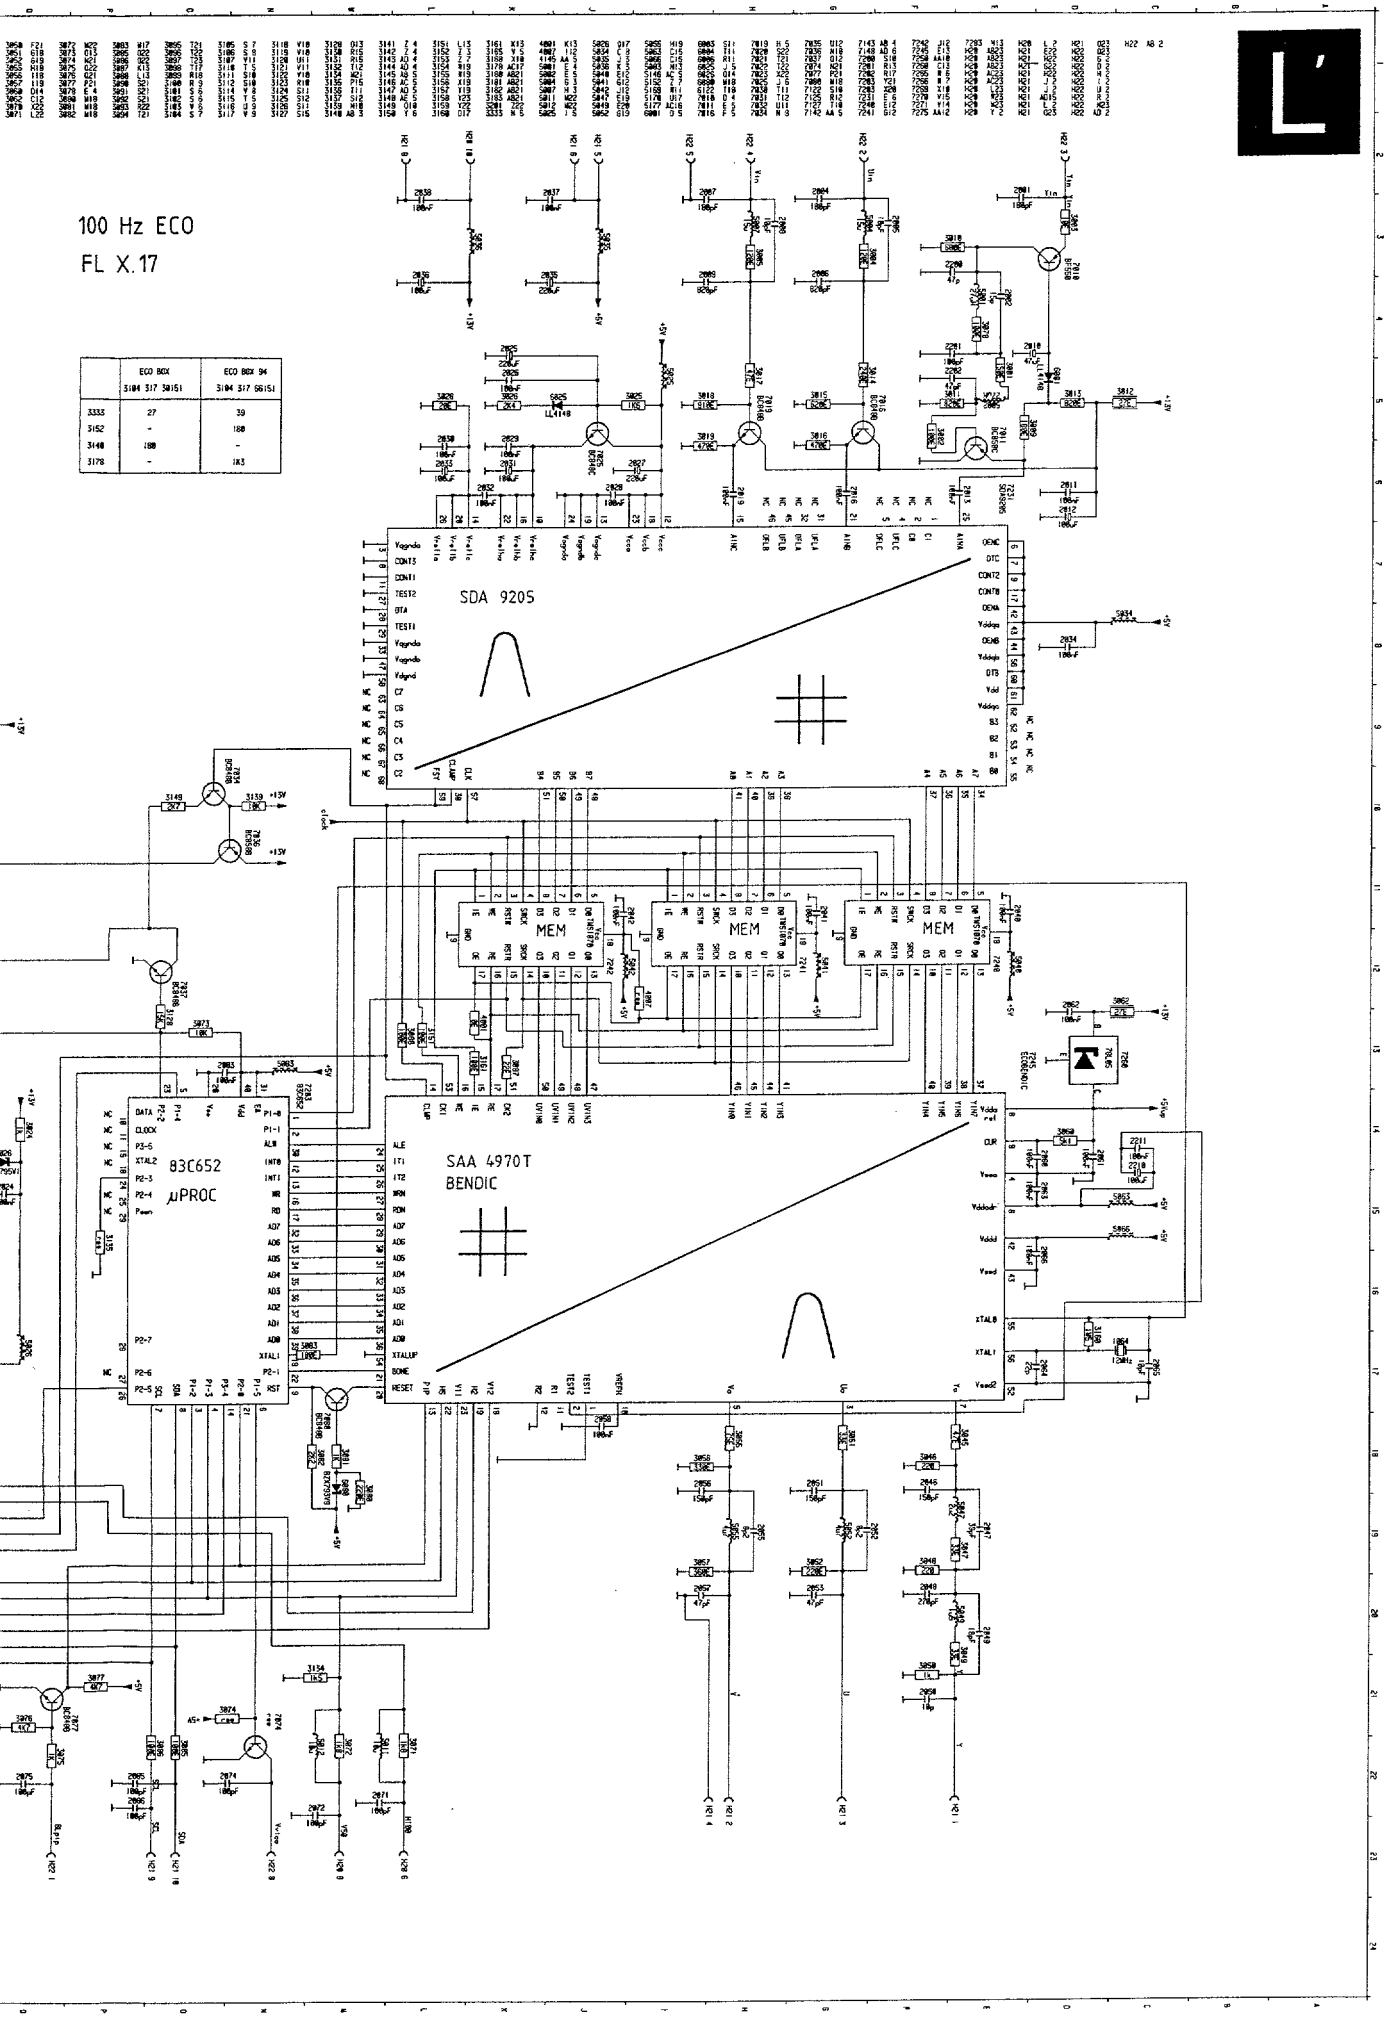
100 Hz ECO
FL X.17
SDA 9205
SAA 4970T
BENDIC
83C652
µPROC
MEM
MEM
MEM

100 Hz / TXT

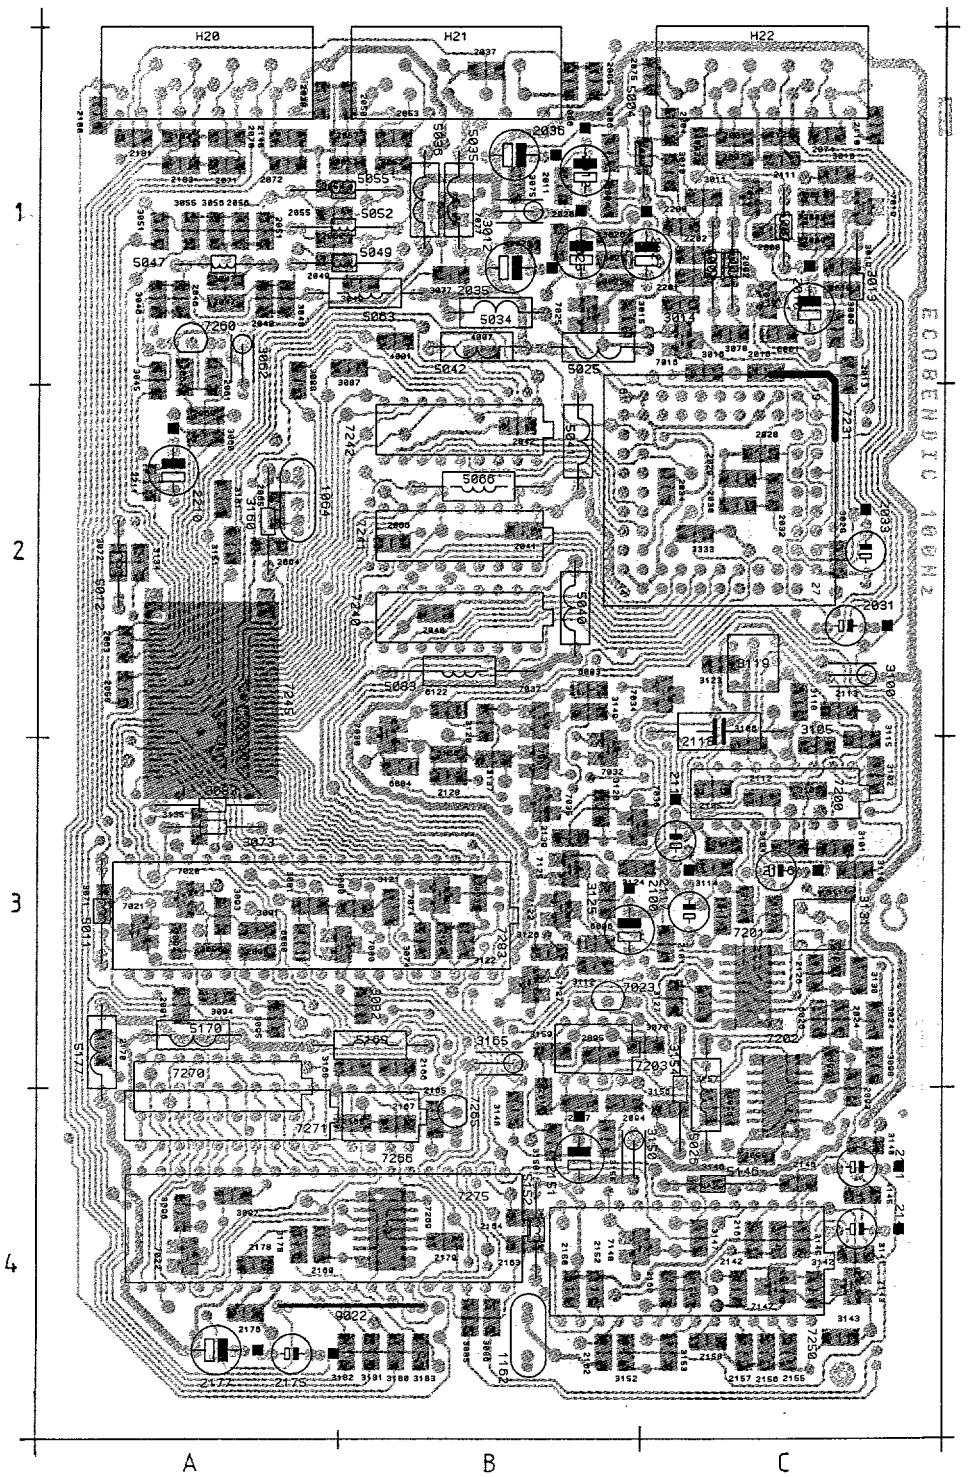

H20 A1	2013 C1	2037 B1	2058 A2	2090 A3	2115 C3	2151 B4	2169 A4	3004 B1
H21 B1	2016 C1	2038 A1	2060 A2	2091 A3	2116 C3	2152 B4	2170 A3	3005 C1
H22 C1	2019 C1	2040 B2	2061 A1	2092 C3	2117 C3	2155 C4	2175 A4	3009 C1
1064 A2	2024 C3	2041 B2	2062 A1	2093 C3	2118 C2	2156 C4	2176 A4	3010 C1
1162 B4	2025 B1	2042 B2	2063 A2	2094 B4	2122 B3	2157 C4	2177 A4	3011 C1
2001 C1	2026 B1	2046 A1	2064 A2	2095 B3	2123 C1	2158 C4	2178 A4	3012 B1
2002 C1	2027 C1	2047 A1	2065 A2	2096 C4	2125 C3	2159 C4	2179 B4	3013 C1
2004 C1	2028 C2	2048 A1	2066 B2	2097 B4	2126 C3	2160 C4	2181 A1	3014 C1
2005 C1	2029 C2	2049 A1	2070 A1	2100 B3	2127 C3	2161 C4	2182 A1	3015 B1
2006 B1	2030 C2	2050 B1	2071 A1	2101 C3	2128 B3	2162 B4	2183 A1	3016 C1
2007 C1	2031 C2	2051 A1	2072 A1	2105 C3	2140 A1	2163 B4	2200 C1	3017 C1
2008 C1	2032 C2	2052 A1	2074 C1	2110 C1	2141 C4	2164 B4	2201 C1	3018 C1
2009 C1	2033 C2	2053 B1	2075 C1	2111 C1	2142 C4	2165 B4	2202 C1	3019 C1
2010 C1	2034 C2	2055 A1	2083 B3	2112 C3	2145 C4	2166 B3	2210 A2	3024 C3
2011 B1	2035 B1	2056 A1	2085 B1	2113 C2	2146 C4	2167 B4	2211 A2	3025 B1
2012 B1	2036 B1	2057 B1	2086 B1	2114 C3	2150 B4	2168 B4	3003 C1	3026 B1

3028 C2	3159 B3
3045 A1	3160 A2
3046 A1	3161 A2
3047 A1	3165 B3
3048 A1	3168 B3
3049 B1	3178 A4
3050 A1	3180 B4
3051 A1	3181 B4
3052 B1	3182 B4
3055 A1	3183 B4
3056 A1	3201 B4
3057 B1	3333 C2
3060 A2	4001 B1
3062 A1	4007 B1
3070 C3	4145 C4
3071 A3	5001 C1
3072 A2	5002 C1
3073 A3	5004 C1
3074 B3	5007 C1
3075 B1	5011 A3
3076 B1	5012 A2
3077 B1	5025 B1
3078 C1	5026 C4
3080 B3	5034 B1
3081 A3	5035 B1
3082 B3	5036 B1
3083 A3	5040 B2
3085 B4	5041 B2
3086 B4	5042 B1
3087 B1	5047 A1
3088 A1	5049 B1
3090 A3	5052 B1
3091 A3	5055 B1
3092 A3	5063 B1
3093 A3	5066 B2
3094 A3	5083 B2
3095 A3	5146 C4
3096 A4	5152 B4
3097 A4	5169 B3
3098 C3	5170 A3
3099 C4	5177 A3
3100 C2	6001 C1
3101 C3	6003 B2
3102 C3	6004 B3
3103 C3	6006 B3
3104 C3	6025 B1
3105 C3	6026 C3
3106 C3	6080 A3
3110 C3	6122 B2
3111 C3	7010 C1
3112 B3	7011 C1
3114 C3	7016 C1
3115 C3	7019 C1
3116 C3	7020 A3
3117 C3	7021 A3
3118 C2	7022 A4
3119 C2	7023 B3
3120 B3	7025 B1
3121 B3	7030 B2
3122 B3	7031 B3
3123 C2	7032 B3
3124 B3	7034 C2
3125 B3	7035 B3
3126 B3	7036 B3
3127 C3	7037 B2
3128 B2	7074 B3
3130 C3	7077 B1
3131 C3	7080 B3
3132 C3	7122 B3
3134 A2	7125 B3
3135 A3	7127 B3
3136 B3	7142 C4
3137 B3	7143 C4
3139 B3	7148 C4
3140 C4	7200 C3
3141 C4	7201 C3
3142 C4	7202 C4
3143 C4	7203 B3
3144 C4	7231 C2
3145 C4	7240 B2
3146 C4	7241 B2
3147 C4	7242 B2
3148 B4	7245 A2
3149 B2	7250 C4
3150 B4	7260 A1
3151 A2	7265 B4
3152 B4	7266 B4
3153 C4	7269 B4
3154 C4	7270 A3
3155 B4	7271 A4
3156 C4	7275 A4
3157 C4	7283 A3
3158 B4	9022 B4

7. Electrical adjustments

Setting conditions

Unless stated otherwise, the supply voltage used is:
220 - 240V 10%; 50 - 60Hz 5%
Voltages and oscillograms are measured in elation to tuner earth. **Never** use the cooling plates as earth.
Warming-up time 10 minutes
For all measurements it is true that:
probe Ri > 1MΩ; Ci < 10pF

1. Electrical settings on the large signal panel

1.1 +141V supply voltage
Supply the mains voltage; this must be isolated from the mains.
Connect a voltmeter over C2238.
Using R3371, on the SOPS DRIVE CIRCUIT (fig. 7.2) set the supply voltage to + 141V ±0.5V.

1.2 +5V supply voltage (FL1/2.16)
Connect a voltmeter to pin 8 of L02
Adjust the voltage to 5.4V using R3558

1.3 +13V supply voltage (FL1/2.16)
Connect a voltmeter to pin 6 of connector L02
Adjust the voltage to 14.2V using R3234.

1.4 Focusing
This is set with the focus potentiometer (top one on the *Line output transformer/DAF Unit*).

1.5 Dynamic 1) Astigmatic focus
This is set with the aid of the potentiometer on the bottom right of the DAF transformer. Repeat the adjustment of the Vg2 and focus.

1.6 Vg2 setting
Supply an aerial signal.
Set the contrast to maximum and the brightness and saturation to nominal.
Using an oscilloscope set to field frequency, measure the direct voltage level of the measurement pulse (fig. 7.1) on pin 9 of IC7705, IC7706 and IC7707 in relation to earth.
Now adjust the highest voltage level found with the aid of the Vg2 potentiometer (bottom left on the Line output transformer/DAF unit) to 150V ±2V.

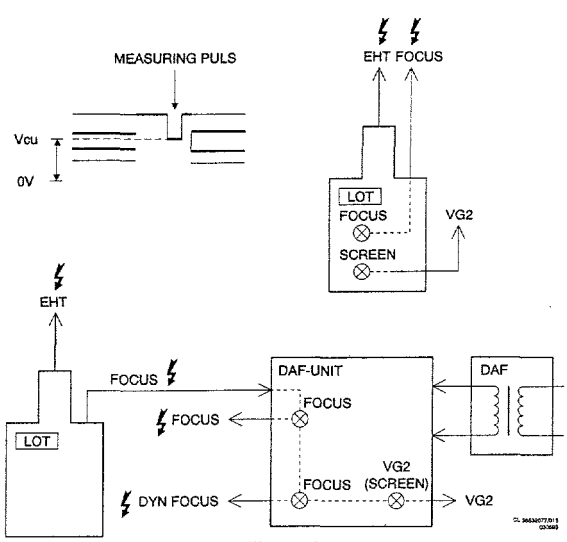

Fig. 7.1

1.7 Stable OSD
Short circuit pin 11 IC7401 to pin 13 IC7401
Short circuit pin 5 IC7755 to earth.
Measure the frequency on pin 16-IC7401 and set this to 15,625 Hz ±25 Hz with R3434.
Remove the short circuits.

1.8 Horizontal synchronisation
Connect point 5-IC7400 to point 9-IC7400.
Supply an aerial signal and set the receiver.
Adjust potentiometer R3406 until the picture is straight.
Break the through connection.

1.9 Horizontal centring
Feed in a test pattern that makes the horizontal linearity visible (e.g. a symmetrical cross pattern or a test circle).
Adjust the DC offset current through the horizontal deflection coil using R3513 so that the horizontal linearity is optimal (the distance between the two vertical lines should be equal on both the left and right hand sides of the picture). It is also possible to use a ruler for this purpose. The picture can then be centred using R3415.

1.10 Picture width
Set using potentiometer R3607.

1.11 Vertical centring
Set using potentiometer R3467.

1.12 Picture height
Set using potentiometer R3410.

1.13 Picture height
Movie expand off: set using potentiometer R3410.
Movie expand on: set using potentiometer R3422.

1.14 East/West correction
Set using potentiometer R3602.

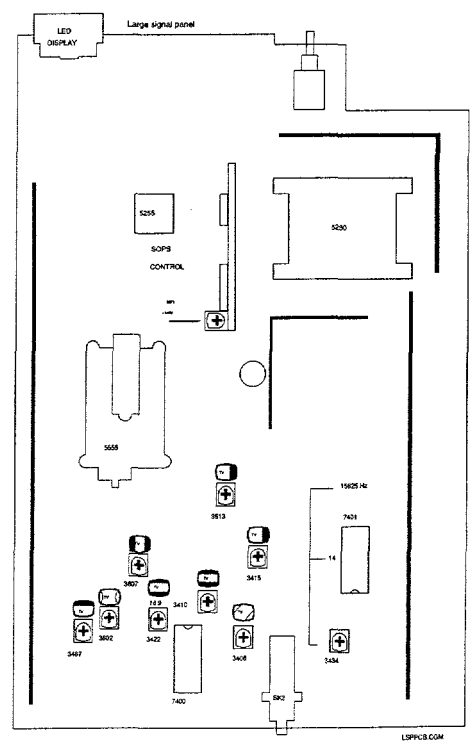

Fig. 7.2

2. E

2.1 S
C
si
S
th
C
U
ar

2.2 4.
S
pc
ar

2.3 E
2.3.1 C
C
th
4.
pi
os
S
R

2.3.2 4.
C
wi
C
C
S
R

2.3.3 6.
C
E
20
C
C
S
R

2.3.4 C
C
ba
ea
pr

2.3.5 C
C
ba
ea
pr

2.3.6 S
C
bl
3-
C
m

2. Electrical settings on the small signal panel

2.1 Stereo audio channel separation

Connect a signal generator with a 2 carrier stereo signal ("stereo" mode).
Select 1kHz for the right-hand channel and switch off the sound for the left-hand channel.
Connect an oscilloscope to pin 3 of Euroconnector EXT1
Using R3602 on the small signal panel, set the amplitude of the signal to minimum amplitude.

2.2 4.43 MHz chroma suppression circuit

Supply a colour bar signal. Connect an oscilloscope to point 17 of IC7324 and set L5305 to minimum amplitude of the chrominance signal.

2.3 Electrical settings IC7365 (TDA4650)

2.3.1 Chroma bandpassfilter

Connect a signal generator (e.g. PM 5326) to pin 20 of the euroconnector (EXT1) and set its frequency to 4.286 MHz/0.2 Vpp. Switch the unit to EXT1. Connect pin 27-IC7365 to pin 13-IC7365 (+12V). Connect an oscilloscope to pin 15-IC7365.
Set L5345 to maximum amplitude.
Remove the interconnection.

2.3.2 4.50 MHz NTSC sound suppression

Connect a generator to point 20 of Euroconnector EXT1 with a frequency of 4.50 MHz and 200mV$_{rms}$.
Connect point 26-IC7365 to point 13-IC7365.
Connect an oscilloscope to point 15 of IC7365.
Set L5346 to minimum amplitude.
Remove the short circuit.

2.3.3 6.50 MHz SECAM DK sound suppression

Connect a sine-wave generator to point 20 of Euroconnector EXT1 with a frequency of 6.50 MHz and 200mV$_{rms}$.
Connect point 28-IC7365 to point 13-IC7365.
Connect an oscilloscope to point 15 of IC7365.
Set L5346 to minimum amplitude.
Remove the short circuit.

2.3.4 Chroma 8,87 MHz auxiliary oscillator

Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 17-IC7365 (TDA4650) to earth. Set C2380 so that the colour on the screen has practically stopped. Remove the interconnection.

2.3.5 Chroma 7,16 MHz auxiliary oscillator

Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 17-IC7365 (TDA4650) to earth. Set R2379 so that the colour on the screen has practically stopped. Remove the interconnection.

2.3.6 SECAM demodulators

Connect a pattern generator and supply a SECAM black pattern. Connect an oscilloscope to pin 3-IC7365. Set L5370 to minimum amplitude.
Connect the oscilloscope to pin 1-IC7365. Set R3370 to minimum amplitude.

SMALL SIGNAL PANEL

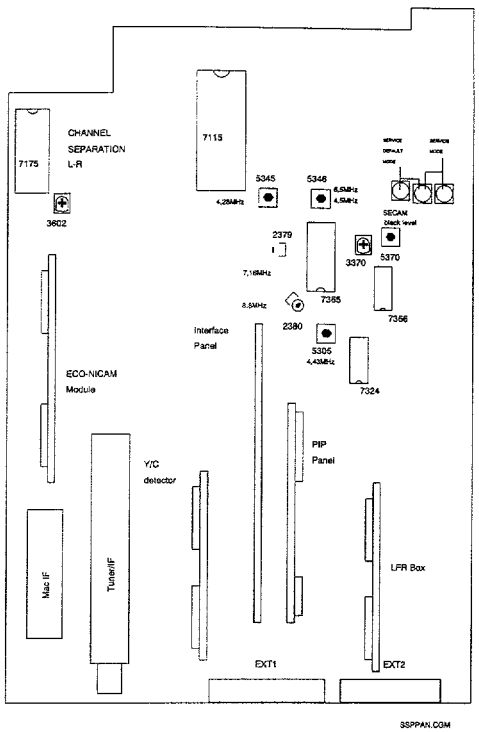

Fig. 7.3



Fig. 7.4

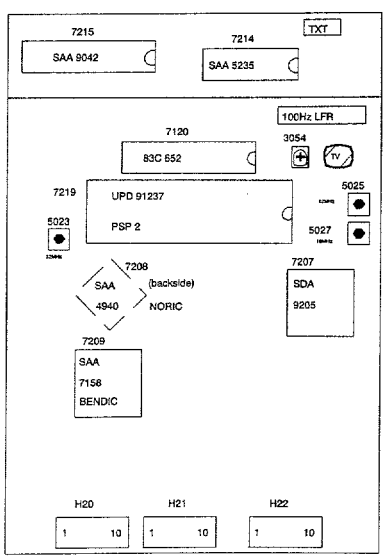

Fig. 7.5

Electrical adjustments

3. Electrical adjustments on the LFR box

3.1 Synchronisation

Connect point 5 of IC7216 to earth. Adjust R3054 until the picture is straight.
Remove the short circuit.

3.2 16MHz oscillator

Apply a PAL/SECAM signal. Measure the signals at point 1 of IC7219 and at point 5 of IC7216 simultaneously with an oscilloscope (fig. 7.9). Adjust coil L5027 so that the positive-going flank of the signal at point 1 of IC7219 comes 7.62 µsec after the negative-going flank of the sync pulse in the video signal (point 5 of IC7216).

3.3 32MHz oscillator

Force the STABLE OSD command to the microprocessor, by disconnecting the set from a possible antenna inputsignal. Measure the frequency at point 41 of IC7208. Using L5023 set the frequency to 32 MHz ±50 KHz.

3.4 12MHz oscillator

Switch on compress.
Measure the signals on point 1 of IC7219 and on point 5 of IC7216 simultaneously with an oscilloscope (fig. 7.9). Adjust coil L5025 so that the rising flank of the signal on point 1 of IC7219 comes 7.62 µsec after the negative flank of the sync pulse in the video signal (point 5 of IC7216).

4. Electrical settings on the ECO-NICAM decoder panel

4.1 Neutral frequency adjustment

Connect a frequency counter via a probe (Ci ≤15pF) to pin 19 of IC7001 (SAA 7280) and pin 15 (GND).
Adjust C2015 in such a manner that the clock frequency is set at 728.025 kHz. (±5Hz)

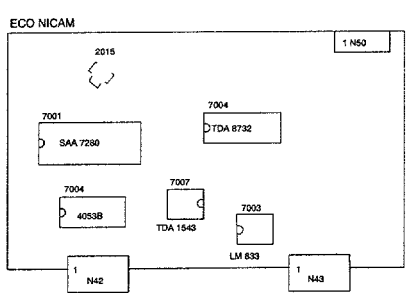

Fig. 7.6

5. Y/C detector adjustment

5.1 PAL/SECAM

Inject a chroma signal of 4.418 MHz/200mV on pin 15 of EXT2 SCART (PL05).
Connect an oscilloscope to the collector of T7266 (T7). Using L5201 adjust the 4.418 MHz signal to maximum amplitude.

5.2 NTSC

As PAL/SECAM but with a signal of 3.582 MHz/200mV. Adjust with L5200.



Fig. 7.7

6. Electrical settings on the PIP panel

Setting conditions
Before carrying out each setting, it should be ensured that a P.I.P. picture with colour bar is visible on the screen and the unit should have reached its operating temperature
(after ≈20 min.).

6.1 Horizontal synchronisation

Supply an aerial or generator signal.
Connect pin 28-IC7125 to pin 13-IC7125.
Connect pin 5-IC7755 to earth.
Measure the frequency on pin 17-IC7755 and set this to 15,625 Hz ±25 Hz with R3239.
Remove the short circuits.

762 AGC

If the picture from a strong local transmitter is distorted, adjust 3160 until the picture is not distorted.

6.3 Setting for PIP modules with TDA4554

6.3.1 Chroma bandpass filter
Connect a signal generator (e.g. PM 5326) to pin 10 of P17 and set its frequency to 4.286 MHz/0.2 Vpp.
Connect pin 27-IC7125 to 13-IC7125.
Connect an oscilloscope to pin 15-IC7125.
Set L5118 to maximum amplitude.
Remove the interconnection.

6.3.2 PAL chroma auxiliary oscillator
Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 17-IC7125 (TDA4554) to earth. Set C2202 so that the colour of the PIP picture is practically still.
Remove the interconnection.

6.3.3 NTSC chroma auxiliary oscillator
Connect a pattern generator and supply an NTSC M colour bar pattern. Connect pin 17-IC7125 to earth. Set C2212 so that the colour of the PIP picture is practically still.
Remove the interconnection.

6.3.4 The delay line
Connect a pattern generator and supply a PAL colour bar signal. Connect the X-input of the oscilloscope to pin 1-IC7125 (TDA4554). Connect the Y-input of the oscilloscope to pin 3-IC7125 (TDA4554). Set the oscilloscope to the X-Y position.
Set L5155 and L5157 so that the vectors lie in one line (points which are furthest from the origin).
Set the pattern generator to the "DEM" mode.
Set R3157 so that the vectors lie on top of one another in the origin.

Electrical adjustments

6.3.5 SECAM identification

Connect a pattern generator and supply a SECAM colour bar signal.
Connect pin 27-IC7125 to pin 13-IC7125.
Connect an oscilloscope to pin 21-IC7125.
Adjust L5190 to maximum DC level.
Remove the interconnection.

6.3.6 SECAM demodulators

Connect a pattern generator and supply a SECAM signal without contents (black). Connect pin 27-IC7125 to pin 13-IC7125. Connect an oscilloscope to pin 1-IC7125. Using L5175, set the DC level during the scan equal to the DC level during the flyback.
In the same way set L5170, but now measure at pin 3-IC7125.
Remove the interconnection.

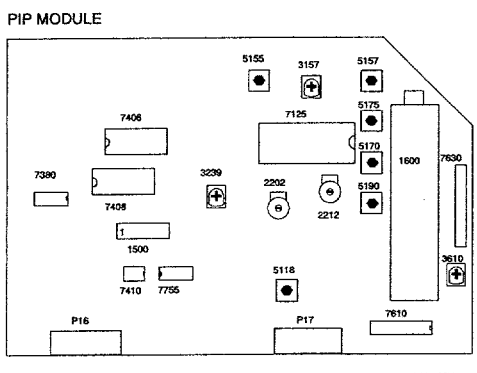

Fig. 7.8

6.4 Adjustment of PLL circuit (36", 16:9)

Connect a pattern generator and apply a PAL colour-bar pattern to the CVBS input.

6.4.1 Adjustment of the PLL oscillator

Movie expand off
Main picture 16:9
PIP-picture 16:9
With the aid of L5101 on the PLL PCB set the DC level on pin 5 of 1500 to 2.5V.

6.4.2 Adjustment of the duty cycle

Movie expand off
Main picture 16:9
PIP-picture 4:3
Connect an oscilloscope to pin 11 of IC7408 (SDA9088).
With the aid of R3130 on the PLL PCB set the time T to 13nsec (see fig. 7.9).



Fig. 7.9

7. Alignments in the Service Menu

7.1 Switch in the Service Menu by momentarily connecting together pins S23 and S24 on the small signal panel (diagram H). The Service Menu will then appear on the screen. The procedure is as follows:

- Select the required alignment with the coloured keys A to E.
- Change the values set using the "Menu +/-" key.
- Store the values set in the EAROM and leave the Service Menu by selecting STORE.

7.2 White Drive Alignment

Switch the set into 4:3 mode.
Switch out the DNR via the remote control.
Select a white picture. (A black picture (e.g. VCR1) set at maximum brightness is also suitable).
Switch the Service Menu in.
Select the required white drive alignment by adjusting the colours red and blue in relation to green (green is the reference colour).

Remarks: In the original factory settings "white" has a colour temperature of 7600K (White with a bluish tint).
The point of departure is green with a value of 44.
The factory setting for blue is then approx. 44.
The factory setting for red is then approx. 21.

7.3 Cut-off Alignment

Switch the set into 4:3 mode.
Switch out the DNR via the remote control.
Select a black picture (e.g. VCR1).
Switch the service menu in.
Set the brightness level so that the picture just (but clearly) illuminates.
Using the Cut-off adjustments align the colour temperatures in such a manner that at minimum illumination of the picture they are the same as the colour temperatures at maximum brightness.
(At minimum picture illumination it is possible that one colour may dominate. This is however normal and does not have to be (fully) compensated with the cut-off alignment).

Remarks: In the original factory settings "white" has a colour temperature of 7600K (White with a bluish tint).
The point of departure is green with a value of 28.
The factory setting for blue is then approx. 33.
The factory setting for red is then approx. 25.

7.4 D2-MAC Alignment

These alignments are described in the section: FL1 SAT box chapter 7.

7.5 Option Alignment

The microprocessor communicates with a great number of components in the set. For correct communication the microprocessor has to know what IC's and modules are present in the set. This is done using option codes. An incorrectly set option code will give a communication problem and an accompanying error code. Every function has been allocated a value. The sum of 8 values forms an option code. This number can vary from 0 to 255. The option code tables are given at the end of this paragraph.

For example, a set has:

Option code 1

Function	*Value*
Frontend FQ816/ME/IF	2
PIP Module	8
NTSC-M	16
NICAM module	64
2nd Frontend on PIP module	128 +

Option code 1 is now:	**218**

Option code 2

Function	*Value*
IC7175 present on SSP	1
100 Hz	4
ECO NICAM	32
100 Hz LFR	64 +

Option code 2 is now:	**101**

Option code 3

Function	*Value*
16:9	64 +

Option code 3 is now:	**64**

Option code 4:

Function	*Value*
Multi-PIP	2
FL2 model	4 +

Option code 4 is now:	**6**

Optioncode 1

Nbr.	Function
0	**Front end = FQ916** A reception of PAL BG or PAL BG and SECAM BG is now possible
1	**Front-End = FQ944** Only reception of the UHF band is now possible
2	**Front end = FQ916/ME/IF** Reception of SECAM L but not of SECAM L' is now possible (reception of NTSC-M is now usually also possible).
4	**Front end =FQ916/MF/IF** Reception of both SECAM L and SECAM L' is now possible (NTSC M reception is generally possible now via the Euroconnector).
8	**PIP module present** This makes it possible to show PIP (Picture in Picture) displays.
16	**NTSC-M reception possible** This is normally always in combination with front end FQ816/ME/IF or FQ816/MF/IF
32	**SECAM DK module fitted** In this case transmissions using the SECAM DK system can also be received.
64	**NICAM module fitted** In this case the digital sound with NICAM transmission can be received.
128	**Second front end for PIP fitted** If this second front end is fitted a second transmitter can be displayed in the PIP picture. The PIP function (number 8) still applies.

Optioncode 2

Nbr.	Function
1	**IC7175 present on SSP** This is always the case.
2	**Not in use**
4	**100Hz featuring present** This is always the case (see also number 64).
8	**Not in use**
16	**Not in use**
32	**ECO NICAM module present** In this case the digital sooun d broadcast in NICAM transmissions can also be received (see further the number 64 of option code 1).
64	**LFR box present** This is always the case (see also number 4).
128	**Not in use**

Electrical adjustments

Optioncode 3	
Nbr.	**Function**
1	**FSS reception only via SAT box** This switches the D2-MAC decoder off.
2	**Front-end on SAT box is: SF916** In this case it is possible to tune the SAT box to 2 GHz.
4	**Satellite front-end SF914/SF916 present (SAT MAC reception)** Switching on and off satellite reception via the satellite front-end. On switching off the front-end D2-MAC can only be received via cable-TV (CABLE MAC via MAC IF module).
8	**MAC IF module present (CABLE MAC reception)** This module makes it possible to decode a D2-MAC signal which is received via the cable front-end (FQ816/FQ844). In this case, besides satellite transmitters, MAC transmitters can also be received via the cable.
16	**SECAM "Telecom Audio" reception possible** This option generates an extra sound channel in the menu on FSS reception. This channel is necessary for the reception of the French "Telecom" satellite. The necessary hardware is present in all sets so that this option may be selected as desired.
32	**Cable-MAC reception only in hyperband** In this case the reception of MAC-transmitters via the cable is limited to the hyperband.
	16:9 present
64	**Not in use**
128	**"Videocolor 36" Picture tube**

Optioncode 4	
Nbr.	**Function**
1	Teletext Peaking Filter on/off for LFR box (Scandinavia) In Scandinavia this number must be selected .
2	**Multi-PIP** When the PIP-module operates on a 50Hz basis the Multi-PIP function is present and this option is active. (Multi-PIP provides 9 or 16 small pictures on the screen simultaneously).
4	**FL2 model** When the operating buttons are located on the side of the set, the set is an FL2 model. (see chapter 4 also).
8-128	**Not in use.**

3. Repair tips

1. The Service Default Mode

The FL1/2is equipped with a service default mode. The service default mode is a fixed, definite state to which the set can be switched.

1.1 Definition state

The definition of the fixed state in the service default mode is as follows:
- all sound and picture controls are in the central position (exception volume which is turned down)
- tuned to 475.25 MHz
- system:
  * PAL/SECAM BG for Multi Europe
  * PAL I for UK
  * SECAM L for Multi French

1.2 Switch on and off

The service default mode is switched on by shorting pins S24 and S25 on the small signal panel.

The service default mode can only be switched off by switching the set to stand-by. If the set is switched off and then on again using the mains switch or the mains plug, the service default mode will remain on.

If the set switches to stand-by immediately after switching-on, the set cannot be operated and also cannot be switched to the service default mode. The child-proof lock has already been activated.
To deactivate the child-proof lock the following series of commands has to be given using the remote control (see also Section 9):
<MENU>-<BLUE>-<RED>-<MENU+>-
<MENU OFF>

1.3 Fault signals

To indicate that the set is in the service default mode, the following is displayed on the screen:

SERVICE 00 00 05 06 05

The five numbers after the word "service" stand for the last five fault signals noted by the operator(s). The number on the extreme right represents the last fault signal, that on the extreme left the last fault signal but 4. Since this enables fault reports to be looked at afterward, it means that intermittent faults can be traced.
When the set leaves the service default mode, the fault-report memory is cleared.

1.4 Operation

During the service default mode the set will accept all operating commands. When, however, the set is switched off and on, it will return to the state as defined above.

2. Error messages

In both FL1 and FL2 models the IC error messages are indicated by a combination of flashing LED's. In FL1 7 LED's on the front of the set are used. In FL2 only 2 LED's have been fitted to the front of the set: 'on' and 'stand-by'; for service purposes the 7 LED's have been fitted inside the set in an SMD version. These are located on the solder side of the panel with buttons for local control on the side of the set. The 2 LED's on the front of the set are connected in parallel with the corresponding service LED's.

Figure 8.1 illustrates the situation for FL1 and FL2. A table of error messages is provided at the end of this chapter.

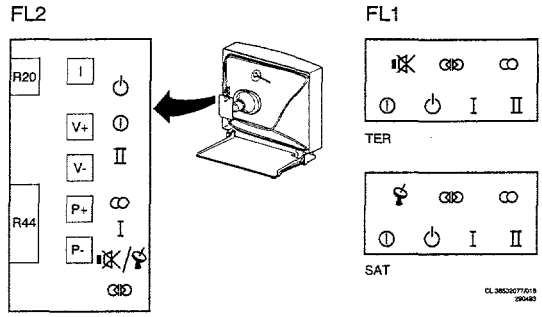

Fig. 8.1

3. Replacement of EEPROM IC7137

If, during a repair, the EEPROM has to be replaced, the microprocessor will detect that the EEPROM is empty. A fault signal (No. 21) will then be displayed.
If the service mode is now activated (see section 7), the microprocessor will load the EEPROM with a number of standard values for the white balance and the other linear settings. These values, however, must all be checked and, if necessary, re-adjusted.
All options have also to be set, the programs installed and the personal preference set.

4. Extension prints

To simplify the measurements ON the various modules extension prints are available for the modules fitted with BTB connectors. Modules can be placed in these connectors so that they stick out above the other prints when the chassis is in the service position.
The code numbers for the extension prints are:

5-fold	4822 395 30261
6-fold	4822 395 30259
8-fold	4822 214 31402
9-fold	4822 395 30258
10-fold	4822 395 30257

5. Removing the PIP module

The PIP module can be simply removed, leaving the set functioning normally (The LED display does however indicate an error condition). Following the removal of the PIP module the signal path is broken. The signal path can be restored by placing the 5-core flat cable with connector S56 in connector foot S16 (see diagram D). The error message can be removed through the application of the option codes (see chapter 7).

6. Removing the SAT box

The SAT box (excluding the interface panel (p)) can be simply removed, leaving the set functioning normally (The LED display does however indicate an error condition). The SAT box can also be partially removed: it is possible to remove both the D2-MAC(S) or FSS(T), leaving the SAT box functioning normally. The error message which remains following the total or partial removal of the SAT box can be removed through the application of the option codes (see chapter 7).

As all programs, including that for the SAT box, are stored in the main EAROM (IC7137), the settings for these programs will not be lost, even if the SAT box is replaced. The EAROM (IC7450) located on the D2-MAC panel stores all the settings for the D2-MAC panel.

7. Extension cables

Extension cables are available to lead the large signal and small signal panel signals (LSP and SSP) separately out of the set. These are made up as follows:

4822 320 20209	Set of 6 cables for LSP and SSP connections.

See chapter 4 also.

8. Central repair

For panels and modules which are difficult to repair there remains a possibility for central repair. Following receipt of a defective module a repaired and tested module is issued.
In order to guarantee the quality of the central repair service a certain amount of information regarding the defective panel is required. This information should be submitted together with the defective panel. This concerns the following information:

1. Clear description of the fault.
2. Indication of intermittent or continuous fault
3. Type/version number of the set
4. AG-production code and week/year number
5. Serial number

The defective modules should be complete and free of mechanical damage.
These facilities are offered for the modules below:

LFR box (L+M)	4822 212 30857
100Hz box [L'}	4822 212 30887

9 Diagnosis and protection

9.1 Hardware and software protection

In case any serious fault occurs in the set, one of the protection circuits will activate. A protection circuit switches of the main power supply (SOPS) via the stand-by input (STBY) of the SOPS control panel. This input is located on pin 1 of connector pin L40 with test point number TP56, and is illustrated on diagram A.
As the microprocessor is fed by a separate stand-by power supply (SOPS), the processor and the LED's will continue to operate, even when the main power supply is switched off.

A number of protection circuits can switch off the power supply independently and immediately (hardware protection). In two protection circuits the microprocessor itself switches off the power supply (software protection).

All protection circuits come together on the stand-by input (TP56 of the main power supply. A diagnosis determines which protection circuit is active.

9.2 Protection test point TP56 [diagram A]

The following voltages may be present on the stand-by input of the SOPS control panel (TP56): [see diagram A]

1 Approx. 17V during operation;
2 0.5 - 1V during hardware protection;
(this value is maintained by a thyristor circuit formed by TS7380/TS7381);
3 0.5Vd uring stand-by and software protection.

9.3 Hardware protection:

1 Power supply voltage +13 from the SOPS too high (+V) [diagram A].
This protection circuit activates if the voltage in +13V circuit of the SOPS becomes too high during operation.

2 SOPS and/or +11/-11V for the audio output amplifier defective (SOUND-PROT).
[diagram G]
The protection circuit activates when the +11V and -11V voltages are no longer in balance, or when both voltages are absent. This protection circuit also operates when the SOPS does not function or is short-circuited.
This protection circuit is fed by the start-up voltage 'Vstart' from the SOPS.

3 Beam current too high (I-BEAM) [diagram B]
When the beam current becomes too high this protection circuit switches off the power supply. Before this protection circuit can activate the picture will first illuminate brightly. This fault occurs for example on the absence of the +200V power supply voltage on the picture tube panel.

4 Deviating LOT behaviour (EHT, LOT-PROT) [diagram B].
This protection circuit becomes active when a 'unusual' voltage forms appear on the LOT outputs (5555). This may indicate defective or loose components in the line deflection circuit. (LOT, switching transistors, capacitors).

5 East/west output stage defective [diagram B].
This protection circuit activates when the current through the east/west switching transistor T7610 exceeds a specific value. In this case transistor T7542 will conduct for a brief period. (the base-emitter voltage Ube from T7542 is then momentary greater than 0.6V).

6 Vertical deflection end stage (IC7450) defective [diagram B].
The frame output stage IC7450 has a protection output (pin 7, TP62). This output becomes momentarily high on any defect in this IC or during the absence of the power supply voltage.
During normal operation there are short pulses on this output.
The frame output stage is fed by a winding on the LOT (5555) (+28V or +32V).
During diagnosis a check should be made whether the +28/+32V power supply voltage continually drops before the protection circuit output is activated. If this is the case then one of the other protection circuits is responsible for switching out the power supply.

By measuring the timing pulses between the protection output (pin 7) and the power supply voltage (pin 6) in relation to earth (pin 2 or 4) it can be determined whether the protection is originating from the frame output stage. The protection circuit overview at the end of this chapter provides a schematic overview of the measurements.

9.4 Software protection

9.4.1 Error message 99

Error message 99 is displayed when software protection is generated by the microprocessor. Software protection becomes active when the +13V and or +5V power supply voltage is not present on the small signal panel (SSP). Due to the absence of the power supply the connected components are unable to provide an IC signal to the microprocessor. The processor then sets the SOPS in stand-by. If this is the case error message 99 is then displayed. Software protection can be switched out by activating the 'Service Default Mode' (see §1).

If the +13V or +5V are absent as a result of hardware protection switching out the power supply, error message 99 will be displayed by the LED's following a short period, as the microprocessor is no longer receiving any signal from the connected IC's. The processor now bridges the hardware protection via the STBY signal. Each hardware protection will therefore eventually result in software protection, resulting in error message 99 being displayed.

During hardware protection the microprocessor makes repeated attempts at communication with the connected IC IC's before making a decision for software protection.
During this period (up to approximately 5 minutes) the set will not react to any operational commands.
Because none of the IC IC's responds in this period various error messages will be displayed by the LED's.
If error message 99 does not eventually appear then the protection circuits are not operational and the cause of the fault can be sought elsewhere.

When the microprocessor generates a STBY signal for implementing software protection TP56 will be made lower than 0.5V by the STBY signal, through which any eventual hardware protection on TP56 will be bridged.
In order to determine whether hardware protection is active via TP56 the voltage on TP56 should be measured with the set in the 'Service Default Mode' or measured before error message 99 appears on the LED display.

9.4.2 Software protection

7 +5V on the small signal panel (SSP) [diagram B and C]
To test whether the +5V power supply voltage, from the LOT winding (5555) [diagram B], is reaching the small signal panel without short-circuiting the front-end (1160 [diagram C]) must provide a signal to the microprocessor via IC within a specific time. If this signal does not arrive, the microprocessor switches the main power supply into stand-by, and the LED's will indicate error message 99 once more.
To test whether the front-end is defective the service default mode will have to be selected. If the power supply voltages on the front-end are correct and a front-end error message persists (error 11), then the front-end is defective.

8 +13V on the small signal panel (SSP) [diagrams A, D and F]).
To test whether the +13V power supply voltage from the main power supply (SOPS) [diagram A] is reaching the small signal panel without short-circuiting, IC7430 (TDA4680 video processor, [diagram D]) or IC7600 (TDA8417, stereo decoder, [diagram F]) or IC7680 (TDA8425, audio processor [diagram F]) must provide a signal via IC to the microprocessor within a specific time. If none of these three IC's provides any signal the microprocessor switches the main power supply into stand-by. The LED's indicate error code 99.

9 SAT box power supply defective (only for set with a SAT box (D2-MAC)).
When the SAT box microprocessor does not send a signal to the main processor in the set, the main processor, following error message 51 (SAT box processor), will switch the software protection in. The LED's now indicate error code 99.
To test whether the SAT box processor is defective the service default mode must be selected. If only the error message from the SAT box is now indicated (error 51), and all power supply voltages on the processor are correct, then the SAT box processor is defective.
The operation of the SAT box power supply [diagram O] can be checked as followed:
Disconnect the SAT box and chassis from one another by disconnecting the band cable between the interface panel [diagram P] and the SAT box [diagram O].
When after a short time the set can be started up from stand-by the SAT box will have an incorrect power supply and error message 99 does not appear.

9.5 Measurements in the protection circuits.

All hardware circuits are illustrated in figure 8.2.
The oscillograms indicate the voltages on the relevant test points immediately after the set is switched on.
In this case the signals illustrated are for during:
- normal operation
- protection caused by this circuit (PROT);
- protection caused by a different protection circuit (N-PROT).

Faultfindingtree

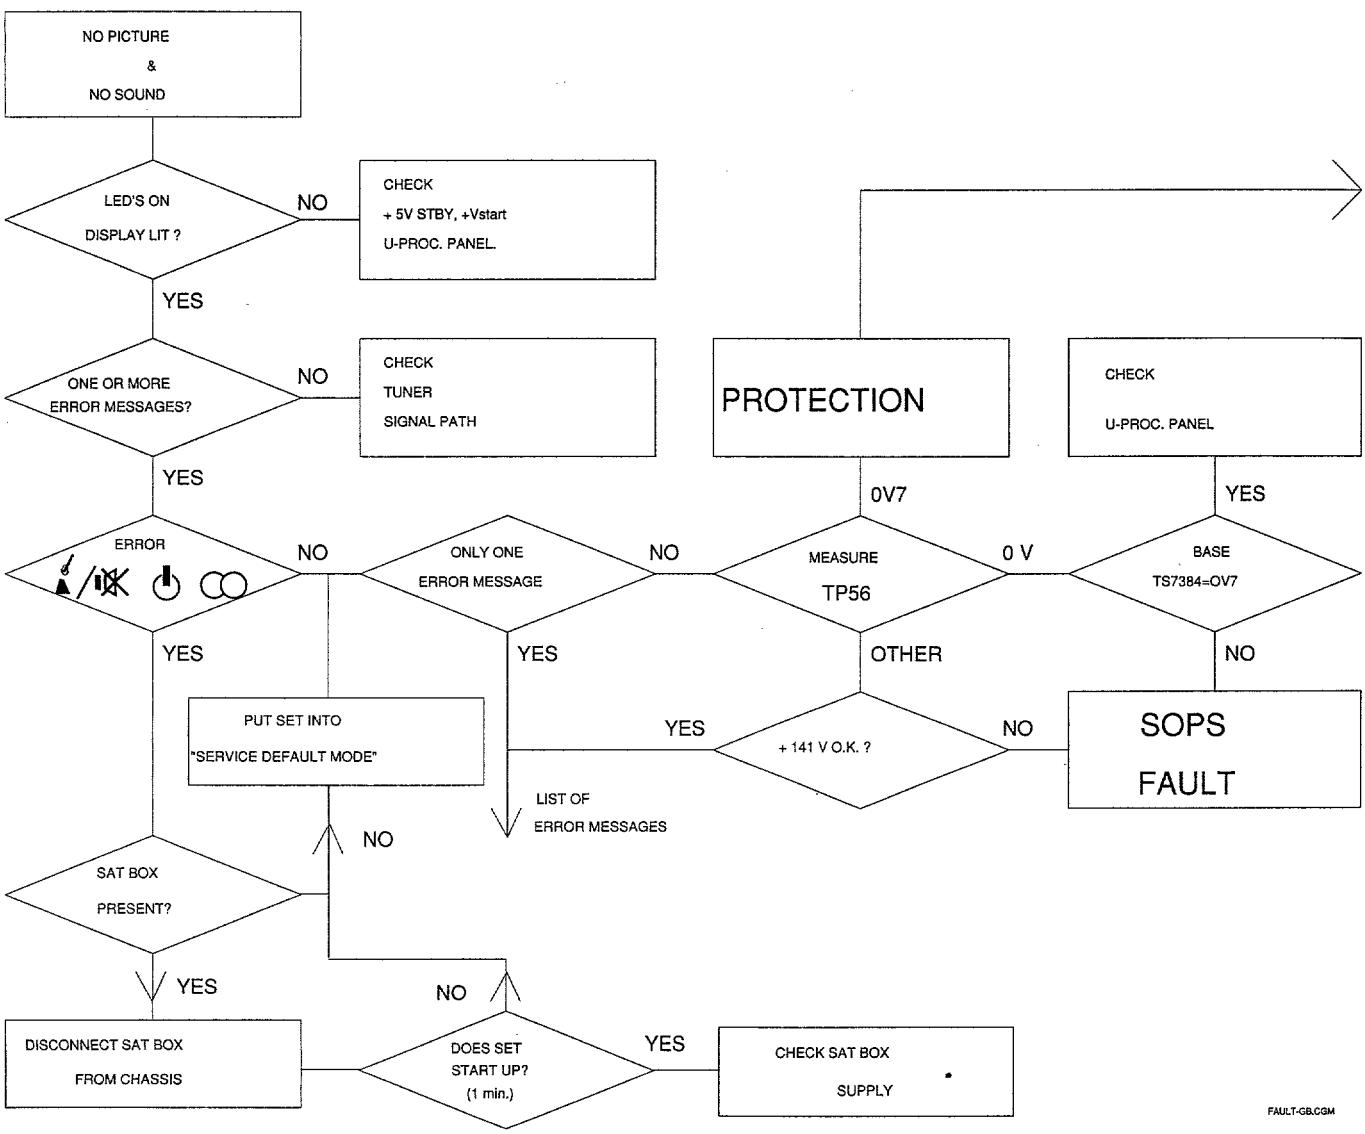

Protection

+11 V
-11 V

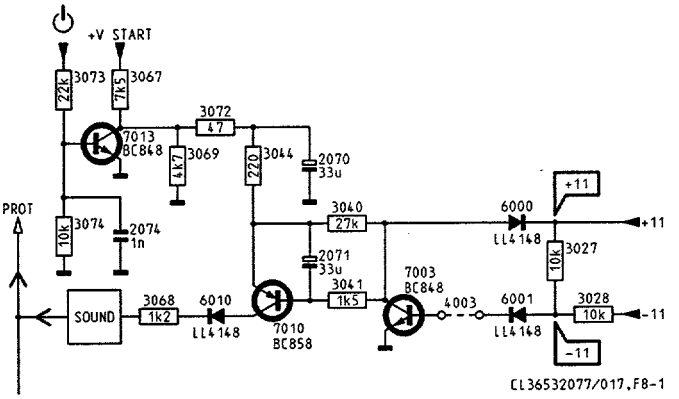

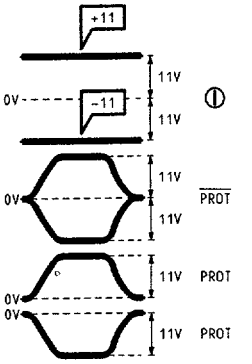

EHT

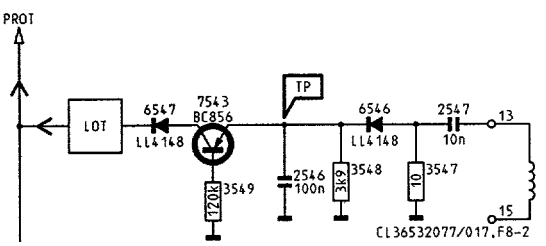



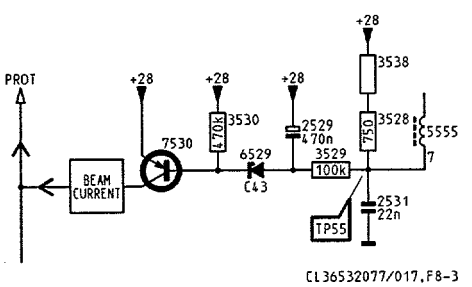

TV

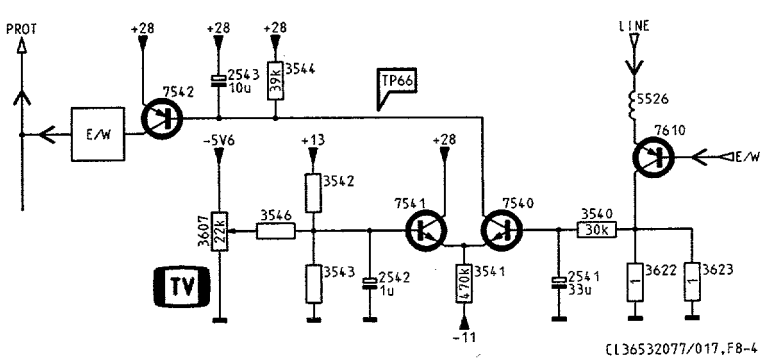



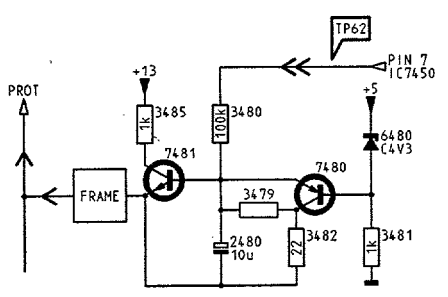



+V

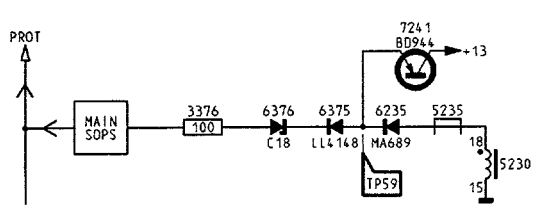



CL36532077/017.FREF
130593

Fig. 8.2

List of error messages

Error number on screen	Flashing LED							Description of error
	🔇			⏻		I	II	
1[1]			X		X	X		I²C,IC7108, SSP [H] (MSM6307)
3					X	X	II	I²C, IC7215, 100Hz [L] [L'] SAA9042
4				X			X	I²C, IC7220, 100Hz [M] [L'} 83C652
5				X				I²C, IC7408, PIP [J] (SDA9088)
6				X	X	X		I²C,IC7600, SSP [F] (TDA8417)
7							X	I²C,IC7680, SSP [F] (TDA8425)
8						X	X	IC7440, frame rotation [Z], PCF8574 (16:9)
9			X	X		X		I²C,IC7430, SSP [D] (TDA4680)
10				X	X		X	I²C,IC7395, SSP [D] (TDA8443)
11				X	X			I²C, front-end, SSP [C] (FQ 9XX)
12						X		I²C, IC7137, SSP [H] (X24C04)
13			X					I²C, bus on chassis blocked
14			X	X				I²C, IC7258, SSP [C] (HEF4094)
15			X	X	X			I²C, IC7219, SSP [C] (TEA6414)
16			X			X		I²C, IC7040, SAT Interface [P] (TEA6414)
17			X		X			IR-receiver on SSP [H] blocked (1100)
18				X		X	X	7115, SSP, µ proc. [H]
19			X	X	X	X		UART Bus blocked, 7115, SSP, µ proc. [H]
20				X	X	X	X	7115, SSP, µ proc. [H]
21				X				EAROM X24C04 empty, IC7137, SSP [H] (§ 8.3)
23	X				X			I²C, IC7080, convergence panel [V] (TDA8444)
28		X						I²C, PIP tuner [J]
29		X						I²C, IC7638, PIP-modulo [J] (SAA1300)
30			X		X		X	I²C, IC7175, SSP [C] (PCF8574)
31			X		X	X	X	I²C, IC7001, NICAM-panel [K] (SAA7280)
33		X						I²C, PLL (1500) PIP modulo [L]
34[1]	X		X				X	LNC supply on SAT box [Q,R] not correct
35[1]	X		X		X		X	IM-bus on SAT box [Q,S] blocked.
36[1]	X		X	X			X	I²C, bus on SAT box blocked.
37[1]	X		X	X	X		X	I²C, IC7450, D2-MAC [S] (X24C02)
38[1]	X		X			X	X	I²C, SAT Tuner [Q] (SF914; SF916)
39[1]	X		X		X	X	X	HEF STROBE 1, IC7925, FSS [T] (HEF4094)
40[1]	X		X	X		X	X	D2-MAC [S]
41[1]	X		X	X	X	X	X	HEF STROBE 2, IC7475, D2-MAC [S] (HEF4094)
42[1]	X				X		X	IC7250, TUNER/CONTROL [Q]
43[1]	X			X			X	UART bus blocked IC7250, TUNER/CONTROL [Q].
44[1]	X			X	X		X	SAT Tuner [Q] (SF914/916)
45[1]	X					X	X	IC7250, TUNER/CONTROL [Q]
46[1]	X				X	X	X	IC7250, TUNER/CONTROL [Q]
47[1]	X			X		X	X	IC7262, TUNER/CONTROL [Q]
48[1]	X			X	X	X	X	D2-MAC [S]
49[1]	X			X		X		EAROM X24C02 empty, 7450, D2-MAC [S] (§17)
51[1]					X	X	X	IC7250, TUNER/CONTROL [Q]
52[1]			X				X	D2B Bus EXT, SSP [H] blocked.
53			X			X	X	IC7330, MAC TXT [S], TPU2735
55			X	X		X	X	IC7140, Panorama [B], PCF8574 (16:9)
99	X		X		X			Protection

[1] This error is only possible on sets with built in SAT box.

In case an error indication on the set is not included in this table, then check the optional codes (see § 7).

11V ⏻ 11V
11V PROT 11V
11V PROT
11V PROT
⏻
PROT
1V PROT
PROT
28V ⏻
28V PROT
28V PROT
0V7 ⏻
28V PROT 5V
28V PROT 5V
16V5 ⏻
<18V PROT
>18V PROT

017,FREF
130593

About this handbook

This is a handbook to help you with the installation and operation of your new menu TV.
With a menu TV, menus can be called up on the screen. These menus provide information either about operations to be carried out or about functions you can select.

This handbook consists of two parts :

Installation

This part helps you with installing your TV, selecting your menu language, locating and storing your TV channels and composing your favourite list of programme numbers.
To do this, follow the directions of the SYSTEM INSTALLATION menu very closely.
The installation menu is shown as it will appear on your screen.



Operation

After you have stored the TV channels, you can call them up on the screen. You can adjust the picture and sound via the main menu. The MAIN MENU is shown here as it will appear on the screen. Feel free to try out all the different possibilities of your TV. Use this part of the handbook to help you doing this.



- This circle in front of a sentence indicates that you have to do something.
- ▻ This arrow in front of a sentence indicates the **result** of what you have done.

In the stripe under each menu you are told which keys you can press and how you can switch the menus off again.

Selecting your menu language

You can choose **for yourself** the language of the menus - the instructions and the various possible choices - which you call up on your screen.

- Press the INSTALL key on the right side of your TV set.



If the message CHILD LOCK ON appears, the child lock should be switched off. See Special Features, p. 14.

- ▻ The SYSTEM INSTALLATION menu appears on the screen.



It is also possible to enter the installation menu via the main menu. See Main Menu, p. 11.

- Press the red key **a** on the remote control.
- ▻ The language menu appears on the screen.



- Press the colour key of your language choice.
- Press the corresponding colour key for >>>>> if the language you want does not appear on the first language menu.

- ▻ LANGUAGE STORED appears for a moment at the top of the menu.
The language menu disappears and the **System installation** menu appears again.
From this point on, all menus are presented in the language of your choice.

Go on to **4.**

Have you pressed the wrong key ?
Press the red key a for LANGUAGE *again and make a new choice.*

Searching for and storing TV channels

After you have switched on your TV and selected your menu language, you can search for and store your TV channels.
Within the installation menu you yourself assign each of these TV channels a number and a name of your own choice, which are then used to call the channels up for viewing.

To expand conventional picture formats to wide screen picture formats, see Other Functions, Picture format, p.16.



- Press the green key **b**.
- ▻ The TV INSTALLATION menu appears.

Is the menu that appears not in your chosen language ?
Press the MENU *key and go back to* 3. *Select your menu language.*

- Press the red key **a**.
- ▻ The CHANNEL INSTALLATION menu appears.

Now follow very closely and **step by step** the instructions of the CHANNEL INSTALLATION menu. You must go through every step. Do this for every TV channel.

Selecting the TV system

The television picture is not broadcast in the same way in all countries.
We speak of different television systems (PAL, SECAM, NTSC, ...)
Now you must select the TV system **yourself**.

- Press the red key **a**.

- ▻ The SELECTING THE SYSTEM menu appears..... **or** ONLY ONE SYSTEM AVAILABLE appears .....

1 You have your own aerial.
- Press the colour key of the country or part of the world from where you want to select the TV channel.
- ▻ The CHANNEL INSTALLATION menu now appears.
- ▻ Your selection lights up.

2 You are connected to the cable system.
- Press the colour key of the country or part of the world where you now are located.
- ▻ The CHANNEL INSTALLATION menu now appears.
- ▻ Your selection lights up.

Go on to step **b**.

If you have pressed the wrong key, then repeat step **a**.

You have a set that can receive only one system.
You do not need to make any selection.

Go on to step **b**.

Searching for a TV channel

This can be done in two different ways :
Either automatic searching or else entering a frequency yourself.

Automatic searching..... **or** **Entering a frequency yourself**.....

The TV itself searches for the channel.

- Press the green key **b**.
- ▻ SEARCHING appears and the TV is searching for a channel.
- ▻ The frequency increases until a channel is found.

Go on to step **c** if you want to store the channel that has been found.
- Press ⊡ under the door of the remote control to recognise which programme is being broadcast.
- ▻ The CHANNEL INSTALLATION menu disappears temporarily.

Do you want a different channel or is the reception poor ?
- Press the green key **b** again.

Is the reception still poor ? See Tips, p. 32.

If no TV channel is found, interrupt the automatic searching by pressing any digit key. Check if you have selected the correct TV system or if the aerial is connected properly.

A TV channel is transmitted at a certain frequency.
If you know the frequency, you can enter it directly and in this way call up the TV channel.
Ask for a list of the frequencies at your cable company or at a dealer.

- First enter the 5 digits of the desired frequency.
- For frequencies under 100 MHz, first enter a 0. For example : 063.25.

Have you entered a wrong number ?
First complete the frequency with arbitrary numbers and then start again.

Fine-tuning

You may be able to improve the reception of picture and sound of a TV channel.
Adjust the frequency yourself with the MENU - or + key on the remote control.

Go on to step **c**.

Entering the programme number and name

Now you **yourself** must assign a number of your choice and a name to the TV channel located. In this way you decide for yourself the order of all your TV channels.

With the assigned programme number you can call up your TV channel again later.
A name of maximum 5 letters or numbers can be given to the programme numbers 0 to 29. For example : SUPER, BBC1, ...
Thus you see immediately which TV channel you have stored under which programme number.

- Press the yellow key **c**.
- ▻ NAMING THE PROGRAMME appears.
- Press the red key **a**.
- Hold down the **P** - or + key on the remote control until the desired programme number appears in the menu.

In this list you can now enter the name of the TV channel.
With the arrow under the letter and number line you select which letter or which number in the list above you wish to enter.
In the list there is a red block next to the chosen programme number.

- Hold, as desired, either the green key **b** down to move the arrow to the left, or else the yellow key **c** to move the arrow to the right.
- ▻ The letter or number that you indicate with the arrow appears in the block.
- Press the blue key **d**.
- ▻ The block moves over one space.
Now you can choose a following letter or number with the arrow.
- Place the arrow between **z** and **0** for a space.

Did you fill in a wrong letter or number ?
Press repeatedly on the blue key d until the block is back in the place where you want to make a change.
Now choose with the arrow the correct letter or the correct number.

Is the complete name filled in ?
- Then press MENU.
- ▻ The CHANNEL INSTALLATION menu appears again.

Storing steps **a** to **c**

Now the TV system, the located TV channel, its programme number and its programme name must be stored in the memory.

- Press the blue key **d**.
- ▻ PROGRAMME STORED appears briefly at the top of the menu.
- ▻ The TV channel is stored in the memory.

Do you want to store another TV channel ?
- Repeat steps **a-b-c-d**.

Are you connected to the cable system ?
- Begin immediately with step **b**. You have already selected the TV system in step **a** for all channels.

Do you want to exit the CHANNEL INSTALLATION menu or have you finished locating TV channels ?
- Press MENU.
- ▻ The TV INSTALLATION menu appears

Favourite TV channels

- Press the green key b in the TV INSTALLATION menu.
- ▻ The PRESELECTION PREFERENCES menu appears.
- Press the red key a.
- ▻ PROGRAMME NUMBER lights up.
- Select the programme number of a TV channel with MENU - or + or with the digit keys.
- Press the green key b.
- ▻ FAVOURITE STATUS lights up.
- Press MENU - or + to select NO or YES.
  In this way you decide whether you want to keep the selected TV channel as a favourite TV channel or not.
- Repeat this for each programme number.
- ▻ From now on when you run quickly through the TV channels by holding the P - or + key pressed down, the indication of the selected TV channel will be displayed in white characters when it is a TV channel from the favourite list, in red characters when it is a TV channel which is not in the favourite list.

Picture rotation

- Press the blue key d in the SYSTEM INSTALLATION menu.
- ▻ PICTURE ROTATION lights up.
- Press MENU - or + repeatedly to adjust the rotation of the picture.

Main Menu



You use the keys in the grey area of the drawing to operate the main menu.

With the colour keys a-b-c-d-e you select your choice in the menus.

The main menu is split into 2 menus and you can:
. *adjust* **picture** *and* **sound** *according to personal preference*
. call up a **programme list** with an overview of the TV channels stored
. select from among various **special features**
. select **recording sources** for your video recorder
. entar the **system installation** menu.



- Press MENU.
- ▻ The MAIN MENU appears.
- Press off to switch off each menu.

Adjusting the picture

- Press MENU.
- Press the corresponding colour key for PICTURE.
- ▻ The PICTURE menu appears



- Press one of the colour keys to select the adjustment you want to regulate.
  When you have a set that can receive the NTSC system and when USA is selected in Selecting the TV system, *see p. 5, also the option tint* appears in the PICTURE 2 menu.
- ▻ The selected adjustment lights up.
- Press MENU - or + in order to regulate the selected adjustment.
- Press a colour key once more in order to select another adjustment.

Do you want to store the changed adjustment in the memory ?
- See Special Features, PP store, p. 14.

Digital scan (Line Flicker Reduction)
In certain circumstances while watching TV programmes it may be preferred to switch off the digital scan line flicker reduction.
- Press the corresponding colour key for DIGITAL SCAN.
- Press MENU - in order to switch off the line flicker reduction.

- Press MENU.
- ▻ The MAIN MENU appears again.

Adjusting the sound

- Press MENU.
- Press the corresponding colour key for SOUND.
- ▻ The SOUND 1 menu appears.



Volume, balance, treble, bass
- Press one of the colour keys to select the adjustment you want to regulate.
- ▻ The selected adjustment lights up.
- Press MENU - or + in order to regulate the selected adjustment.
- Press a colour key again to select another adjustment.

Do you want to store the modified adjustment in the memory ?
- Press MENU.
- ▻ The MAIN MENU appears.
- See Special Features, PP store, p. 14.

Speech
- Press the white key e in the SOUND 1 menu.
- ▻ The SOUND 2 menu appears.
- Press the corresponding colour key for SPEECH.
- ▻ SPEECH lights up.
- Press MENU + to reveal the treble and to suppress the bass.
- Press MENU - to switch off.

Spatial and surround sound
- Press the corresponding colour key for SPATIAL in the SOUND 2 menu.
- ▻ SPATIAL lights up.
- Press MENU - or + to switch off or on.
- ▻ When SPATIAL ON is selected, it seems as though the loudspeakers are spread further apart from one another. You get a spatial sound effect.

You achieve a Surround Sound effect if you have 2 or for a maximum effect 4 extra loudspeakers connected. See Peripherals, p. 27.
In case of 2 extra loudspeakers, always connect them to REAR at the back of your TV.
In case of 4 extra loudspeakers,connect them to FRONT and REAR.



- Press the loudspeaker switch on the back of the TV out.
- ▻ The internal loudspeakers of your TV are now switched off.
- Place the loudspeakers in the corners of an imaginary square.

Mono broadcasting activates the two loudspeakers of your TV set or the two loudspeakers connected to FRONT.
- Select SPATIAL ON.
- ▻ You get a pseudo stereo effect.

Stereo broadcasting activates the two loudspeakers of your TV or the two loudspeakers connected to FRONT and the two loudspeakers connected to REAR.
- Select SPATIAL ON.
- ▻ You get a spatial stereo effect.

Sound mode
- Press the corresponding colour key for SOUND MODE in the SOUND 2 menu.
- ▻ SOUND MODE lights up.
- ▻ If the TV channel which you are now watching transmits stereo or digital sound you can choose between :
  . **stereo** or **mono** if the TV channel transmits *stereo* sound
  . **digital** or **analogue** if the TV channel transmits *digital* sound.
- Select **analogue** or **mono** in case of weak digital or stereo sound signals.
- Press MENU - or +.

If you do not make a sound choice for the TV channel which you are watching your TV will choose between stereo or digital sound, depending on the sound the TV channel transmits.

- Press MENU.
- ▻ The MAIN MENU 1 appears again.

Programme list

- Press MENU.
- Press the corresponding colour key for PROGRAMME LIST.
- ▻ A list with an overview of the stored TV channels appears.
  TV channels from the favourite list are displayed in white characters.
  TV channels which are not in the favourite list are displayed in red characters.
- Press MENU.
- ▻ The MAIN MENU 1 appears again.

- Press off.
- ▻ The MAIN MENU disappears.

Special features

- Press MENU.
- Press the corresponding colour key for SPECIAL FEATURES.
- ▻ The SPECIAL FEATURES menu appears.



- Press a colour key in order to choose between child lock, sleeptimer, pp store, demonstration, pip size or picture format.
- ▻ Your choice lights up.
- Press once more on a colour key to make another choice.

Child lock
If the child lock is on, the TV can only be switched on with the digit keys on the remote control. The keys on the TV cannot be used.
- Press the corresponding colour key for CHILD LOCK.
- Press MENU - or + to switch the child lock off or on.

Sleeptimer
With the aid of the sleeptimer you can set the time when the TV should switch itself off.



- Press the corresponding colour key for SLEEPTIMER.
- Hold the key MENU + pressed down.
- ▻ The counter runs from off up to 90 minutes.
- Hold the key MENU - pressed down.
- ▻ The counter runs from 90 down to off.
  If you have set a time, then one minute before the TV switches off the remaining minute automatically appears on the screen.
  You can always switch off your set earlier.
  Up to the last minute you can always change the time set.

PP store
Adjustments made in the picture- and sound menu can be stored in the memory and be called up again with the PP key.
- Press the corresponding colour key for PP STORE.
- ▻ PP STORE lights up and PERSONAL PREFERENCE STORED appears briefly on the top of the menu.
  At this point all previous adjustments are cancelled.
  See also Other functions, p.17.

Demonstration
This function demonstrates one after another all the possible options of your TV.
- Press the corresponding colour key for DEMONSTRATION.
- Press MENU + to switch the demonstration on.
- Press off in order to stop the demonstration.

Pip size
You can select either a large or a small pip format.



- Press the corresponding colour key for PIP SIZE.
- Press MENU - or +.
  For more information about Pip, see Pip, Picture in Picture, p. 20.

Picture format
A programme in the conventional picture format can be expanded so that you can take full advantage of your wide screen.



- Press the corresponding colour key for PICTURE FORMAT.
- Press MENU - or + repeatedly to select NORMAL, PANORAMA or EXPAND in order to choose between a conventional, a panoramic or a full expanded picture format.

Directions for use

Other functions



P↔P

PP I-II

Picture format





- Press repeatedly to select
  . or a conventional picture format
  . or a panoramic picture format
  . or a full expanded picture format
  . or a wide screen picture format.
- ▷ The information PANORAMA appears briefly on the screen if a panoramic picture format has been selected.
- ▷ The information MOVIE EXPAND appears briefly on the screen if a full expanded picture format has been selected.
- Keep MENU + pressed to move the full expanded picture upwards so that the subtitles, if there are, become visible at the bottom.
- Keep MENU - pressed to move the full expanded picture downwards again.
- ▷ The information WIDE SCREEN appears briefly on the screen if a wide screen picture format has been selected.

Making subtitles visible from pictures from VCR1, VCR2 or SAT

- Press the **M** on the remote control repeatedly until the designation **TV** appears in a grey block.
- Keep MENU + or - pressed to move the picture upwards or downwards again.
- Press the **M** again until the designation **VCR1, VCR2** or **SAT** appears in a grey block.
- ▷ Now you can operate your video recorder 1 or 2 or satellite tuner again with the remote control of the TV.

Previous programme

- Press the P↔P key.
- ▷ The previous selected TV channel is displayed again.
  The ⊣⊢ indication has a video recorder function.

Brightness

- Open the door of the remote control.
- Press ☼ - or + in order to adjust the brightness.

Selecting satellites

The keys - and + are only functional when having connected a satellite tuner in combination with a satellite positioner and an automatically rotatable polarmount antenna to select satellites.

PP key

With the green **PP**-key you can call up again the picture and sound adjustments which have been stored with the **PP store** in the Special Features menu, p.14.

- Open the door of the remote control.
- Press **PP**.

Information on screen

After the selection of a TV channel the following information appears briefly on your screen :

. the programme number and name of the selected TV channel
. the actually selected sound mode if the TV-channel transmits stereo or digital sound
. SOUND MUTED when the sound is temporarily interrupted
. the name of the pip connection if pip is switched on.
See Pip-Picture in Picture, p.20
. DUAL I or II in case of bilingual broadcast.



- Open the door of the remote control.
- Press **short**.
- ▷ The channel information appears on the screen for a few seconds.
- ▷ If the sleeptimer is on, then the remaining time becomes visible.

Permanent programmenumber

- Open the door of the remote control.
- Press **long**.
- ▷ The information appears on the screen for a few seconds and the permanent programme number remains in the upper right hand corner of the screen when it was off, or disappears when it was on.

Bilingual Broadcast

If you are watching a TV channel which is being broadcast in two languages, dubbed and original language, you can make your choice.

- Open the door of the remote control.
- Press key I-II and select language I or II.
- ▷ DUAL I or II appears for a moment on top of the screen.
  The setting is stored in the memory for the selected TV channel when switching to another TV channel or to standby.



Time

The time can only be called up if the TV channel you are watching is also broadcasting teletext.
Teletext does not need to be switched on.



- Open the door of the remote control.
- Press .
- ▷ The time appears in the upper right hand corner of the screen.
- Press again in order to switch off.

Freezing the picture

When watching you can freeze the picture at any moment.

- Press .
- Press again to return to normal picture.

DNR

With DNR, Dynamic Noise Reduction, you can reduce the noise when receiving a weak signal and so improve the picture quality.

- Press the DNR key repeatedly to select DNR MIN, DNR MAX or DNR OFF.
- ▷ Your selection appears for a moment on top of the screen.
  DNR MIN offers you an optimum picture quality, and it is the most ideal setting for signals of normal strength.
  DNR MAX is not necessary when the picture quality is good.

The setting is stored in the memory only for the selected TV channel after you have switched to another TV channel.

Multi-Pip

With Multi-pip, you can scan the TV channels stored in the favourite list, display successive frozen pictures with the photo finish function and reproduce the main picture image by image with the strobe function.



- Press .
- ▷ A menu line appears on the bottom line of the screen. It contains four functions, each having another background colour, corresponding to the menu colour keys.
- Press the corresponding colour key to activate one of the 4 functions.

Scan

- Press the red key a.
- ▷ A scan of the stored TV channels is performed, starting with programme number 0.
  Only TV channels placed in the favourite list or programmes from switched on peripherals are displayed.
  On the last position, bottom right, a live picture is shown of the programme that was displayed before Multi-pip was switched on.
- Press the rad key a again.
- ▷ A following series of stored TV channels from the favourite list or programmes from switched on peripherals is scanned.
  Each pip-picture will contain its belonging programme number.
- Select a TV channel with the digit keys.
- ▷ Multi-pip disappears and the selected TV programme will be displayed.
- Press the blue key d to interrupt the scan function and to switch off Multi-pip.

Never perform a scan while recording a TV programme with a video recorder connected to EXTERNAL 1 *or* 2 *and when having selected an option in the Recording Source menu since the scan will be recorded on tape.*

Photo finish

- Press the green key b.
- ▷ *The main picture is displayed in successive* frozen pictures.
  The last picture on the bottom right will remain live.
- Press the green key b again.
- ▷ A new photo finish picture is displayed, overwriting the old one.
- Press the blue key d to switch off the photo finish function and to switch off Multi-pip.
- ▷ The programme that was selected before Multi-pip was switched on, appears again.

Strobe

- Press the yellow key c.
- ▷ The picture is reproduced image by image. So you get an interrupted movement.
- Press the yellow key c again.
- ▷ The picture is reproduced image by image in a faster way.
- Press the yellow key c once again.
- ▷ The strobe function is switched off.
- Press the blue key d to switch off Multi-pip.

Directions for use

Pip - Picture in Picture



With pip, picture in picture, you can call up a little screen within the main TV screen. Thus at the same time you can watch two different programmes.
The picture in the small screen has no sound

Switching pip on and off

- Open the door of the remote control.
- Press .
- ▷ The pip screen appears and the image is the same as in the main screen.
- ▷ The name of the pip programme appears briefly on the main screen.
- Press again to switch pip off.

Selecting pip programmes

- Press - P + of the pip keys in order to change the TV channels in the pip screen.

Selecting pip connections



- Press repeatedly.
- ▷ The name of the connections appear.
  If any other electronic unit is connected with a eurocable and switched on, its programmes appear in the pip screen.
  Use - P + of the pip keys in order to change the TV channel in the pip screen.
  For connecting equipment to EXTERNAL 1, EXTERNAL 2, FRONT, see *Peripheral Equipment*, p. 25.

Switching screens



- Press .
- ▷ The main screen and the pip screen exchange places.
  If the TV channel is only in the pip screen and not in the main screen, then use - P + of the pip keys in order to change your TV channel in the pip screen.

Still Picture

- Press .
- ▷ The picture in the pip screen stands still.
  Even when pip is not switched on, the main screen will appear as a still picture in the pip screen.
- Press again or select another channel in the pip screen in order to cancel the still picture.

Moving the Pip screen



- Press .
- ▷ Each time you press this key, the pip screen moves to another corner of the main screen.

If the main screen is a full expanded picture format, the pip screen only moves to the upper left hand corner of the main screen.

Pip Size

You can select either a large or a small pip screen.
See Main Menu : Special Features, p.14.

Teletext



Most TV channels broadcast information via teletext. Each channel which broadcasts teletext transmits a page with information on how to use its teletext system. Look for the teletext page with the index (usually page 100).
TV programmes are sometimes subtitled for the hard of hearing. Depending on the TV channel, *teletext is transmitted in different systems: WST, TOP, FLOF.* The system utilised is indicated in the options line at the bottom of the screen.



Switching Teletext On and Off

- Select the TV channel for the desired teletext broadcast.
  Teletext cannot be switched on when there is a menu on the screen.
- Open the door of the remote control.
- Press in order to switch on the teletext.
- ▷ The contents appear on the screen together with two information lines at the top and an options line at the bottom.

When a selected teletext page *contains several subpages, the subpage* numbers which are automatically stored in the memory appear in the first information line. The coloured number indicates the displayed subpage. The white numbers refer to the subpages which can be selected with MENU - or +.

In the following information line appears:
. the name of the TV channel selected
. the page counter
. date and time.

- Press again in order to switch off the teletext.
- ▷ The TV channel reappears.

Easy Teletext system

The major advantages of this new teletext system are :

A considerable **reduced waiting time** by *predicting what the user* will probably select and which results in :
. a fast and direct selection of previous and following pages which are in transmission
. the precapturing of the pagenumbers read from the displayed page
the direct selection of the last 2 page numbers selected with the digit keys
. the precapturing of the pages referred to in the options line
the creation of a **habit watcher list** : not predictable pages, being selected by the user, are put in a list of preferred pages so that they are immediately *available afterwards.*

The precapturing of up to **9 subpages** to be controlled by the teletext user.

Selecting a Teletext Page

With the digit keys ..... **or** **With the options line**.....

- Enter the desired page number with the digit keys.
- ▷ The page counter seeks the page or the page appears immediately when the page number has been stored in the memory.
- ▷ A message appears when you have entered a not existing or an incorrect page number. Page numbers beginning with 0 or 9 do not exist.
- Enter the correct page number.

- Select with the colour keys, corresponding to the coloured options at the bottom of the screen and depending on the teletext the selected TV channel transmits,
  - the previous ◁= or the following =▷ pages
  - the previous selected pages
  - another subject

Quickly run through the teletext pages

- Press P - to run through the previous pages.
- Press P+ to run through the following pages.

Selecting the previous teletext page

- Press the P⇔P key.
- ▷ The previous selected teletext page is displayed again.

Selecting subpages

When a selected teletext page consists of different subpages, one of the subpages appears on the screen.
The coloured number in the first information line refers to the displayed subpage.
The other subpage numbers appear in white as soon as the transmission has found them.



- Press MENU - to select the previous subpage.
- Press MENU + to select the following subpage.

Selecting the table of contents

- Press the white colour key e.
- ▷ The table of contents appears.

Special teletext functions

Hold
You can stop the page counter from seeking when you have entered a wrong page number or when the page is not available.

- Press .
- ▷ appears in the first information line.
  The page counter stops seeking the entered page number.
- Enter another page number.
- ▷ disappears.

Reveal
Some pages contain concealed information, such as solutions to riddles and puzzles.
- Press ? to call up concealed information.
- Press ? again in order to switch off the concealed information.

Interrupt
- Press X.
- ▷ The TV programme appears.
- ▷ at the top of the screen indicates that you are still in the teletext mode.
  Before interrupting teletext, you can select a page number.
  When the page has been found, the information line appears briefly on your screen.
- Press X again.
- ▷ Teletext reappears.



Mix
- Press .
- ▷ *The teletext page* and the TV programme appear on the screen at the same time.
- Press again.
- ▷ Only the teletext page is displayed.

Enlarge



- Press to enlarge the top half of the teletext page.
- Press again to enlarge the bottom half of the teletext page.
- Press once more to return to normal page size.

Subpage
By adding a subcode you can call up a desired subpage.
- Enter the page number.
- Press .
- Enter the desired subpage with the digit keys : e.g. 3 for the third page of seven subpages.
- Press in order to cancel the subcode.

Subtitles and newsflashes
- Select the contents page (usually page 100).
- Select the page number for subtitles or newsflashes.
- ▷ Subtitles or newsflashes, if there are, appear at the bottom of the TV programme.

Peripheral Equipment

There is a wide range of electronic equipment that can be connected to your TV.
The following connection diagrams show you where the different equipment should be connected at the back or the right side of the TV.



TV and video recorder

- Connect the aerial cables 1 and 2 as shown alongside. A better picture quality is obtained if you connect a eurocable 3 additionally.

S-VHS video recorder

- Do you have a S-VHS video recorder with S-VHS cinch connectors, then connect as well as the aerial cables 1 and 2

the S-VHS cables 4 and 5

and the S-VHS cables 6 and 7.

Do not connect an additional eurocable.



OR

- Do you have a S-VHS video recorder with a S-VHS euroconnector, then connect as well as the aerial cables 1 and 2, the S-VHS eurocable 3.

Never connect to the same TV one video recorder with S-VHS cables at the same time as one video recorder with a euroconnector.
The euroconnector has no function.



Searching for and storing the testsignal of the video recorder

- Unplug the aerial cable of the aerial socket "IN" of your video recorder.
- Switch on your TV and video recorder.
- Press the INSTALL key at the right side of your TV, or enter the System Installation menu via the main menu.
- ▷ The SYSTEM INSTALLATION menu appears.
- Search for the testsignal of your video recorder in the same way as you searched for and stored the TV channels. See Installation, Searching for and storing TV channels, p. 5.
  Store the testsignal either under programme number 0 or between 50 and 59.
- Insert the aerial plug again into the aerial socket "IN" of your video recorder after you have stored the testsignal.

TV, video recorder 1 and one or more peripherals

- Connect the aerial cables 1, 2 and 3 as shown alongside. A better picture quality is obtained if you connect the eurocables 4 and 5 additionally.
- Look for the test signal of your peripheral in the same way as you do for a video recorder.



When having more than one peripheral, connect them to each other with an extra aerial cable 6 and an additional eurocable 7 to obtain a better picture quality.



Only with a video recorder connected to EXTERNAL 2 it is possible to record a programme from your TV as well as from other connected equipment. See Recording with your video recorder, p. 31.

TV and laser disc or satellite tuner or Photo CD/CDI equipment

- Connect the aerial cables 1 and 2 as shown alongside. A better picture quality is obtained if you connect the eurocable 3 additionally.
  See also Installation, Photo CD/CDI, p. 9, if you connect a Photo CD/CDI equipment.

Look for the test signal of your equipment in the same way as you do for a video recorder.



Audio equipment

You can listen to your TV sound via your audio equipment.

- Therefore connect the audio cables to the audio input of your equipment and to AUDIO L and R at the back of your TV.
- Press 🔇 on the remote control.
- ▷ The loudspeakers of your TV are switched off.



Camera and camcorder

- Connect your camera or camcorder to FRONT at the right side of your TV.
- Connect the equipment to VIDEO 1 and AUDIO L 2 for mono equipment.
- In the SOUND menu select mono sound. See Main Menu, Adjusting the sound, Sound mode, p. 13.
- Connect AUDIO R 2 for stereo equipment.
- In the SOUND menu select stereo sound. S-VHS quality with a S-VHS camcorder is obtained by connecting the S-VHS cables with the S-VHS input 3 and AUDIO inputs 2.



Extra loudspeakers

To achieve a better sound effect you can connect 2 or 4 extra loudspeakers, min. 8 Ohm.
See also Spatial and Surround sound, p. 12.

- Hold the connector clip pressed in and insert the ends of the wires into the openings. On the back of the TV it is indicated where you connect the FRONT and REAR loudspeakers.



In case of 2 extra loudspeakers:

- Connect them to FRONT ..... *or*
- *Connect them to REAR.*
- Press the loudspeaker switch on the back of the TV out.
- ▷ The internal loudspeakers of your TV are now switched off.
- ▷ You achieve a better front sound effect.
- ▷ You achieve a surround sound effect.
  A loudspeaker kit to achieve Surround Sound, containing two extra boxes only to be connected to REAR and 12 m wire can be purchased from your dealer.
  Do never connect the loudspeakers from these kit to FRONT.

In case of 4 extra loudspeakers :

- Connect them to FRONT and REAR.
- Press the loudspeaker switch on the back of the TV out.
- ▷ The internal loudspeakers of your TV are now switched off.

Headphone

- Insert the plug into the headphone socket 🎧 at the right side of the TV.
- Adjust the volume with ◿ - or +.
- Press 🔇 on the remote control.
- ▷ The internal loudspeakers of your TV are switched off.
  The headphone socket has an impedance of between 8 and 4000 Ohm and is of the 6.3 mm jack type.

Decoders

Cable TV offers you a wide choice of programmes. Most of them are free, others are to be paid for by the viewer. This means that you will need to subscribe to the broadcasting organisation whose programmes you wish to receive. This organisation will supply you a corresponding decoder unit to allow the programmes to be unscrambled.
For further information, ask your dealer. See also the booklet supplied with your decoder.

Connecting a decoder with an aerial socket to the TV

- Connect the aerial cables 1 and 2 as shown alongside.
  When your decoder has a euroconnector you obtain a better picture quality if you connect a eurocable 3 additionally.



Connecting a decoder without an aerial socket to the TV

- Connect the decoder with your TV with a eurocable 3 only.

Connecting the decoder to the video recorder

Some video recorders have a special euroconnector for decoder.

- Connect a eurocable to the euroconnector of your decoder and to the special euroconnector of your video recorder.
  See also the handbook of your video recorder.
- To connect your video recorder to the TV, see before.



Reproducing Picture and Sound



Most of the audio and video equipment from our range of products can be operated with the remote control.

a. from equipment connected only with an **aerial cable**

- Switch your TV on.
- With the digit keys select the programme number under which you have stored the test signal.
- Switch on the equipment with the remote control.
- ▷ The picture and/or sound is reproduced.

Do you want to watch TV again ?

- Enter the programme number of the TV channel which you want to watch with the digit keys.

b. from equipment connected with a **eurocable**

- Switch your TV on.
- Switch your equipment on.
- ▷ Either the picture and/or the sound is reproduced or descrambled.

If this is not the case :

- Press C repeatedly until the designation EXT1, EXT2 or FRONT appears on the screen, according to where you connected your equipment at the back or the right side of your TV.
- Press M on the remote control repeatedly until the designation VCR1, VCR2, SAT, LD, TUNER, CD or TAPE appears in a grey block.
- ▷ Either the picture and/or the sound is reproduced.

Do you want to watch TV again ?

- Press the TV key under the display of the remote control.
- Press C repeatedly until the picture and/or the sound from the TV channels is reproduced

C. from a S-VHS recorder connected with **S-VHS cables**

- Switch your TV on.
- Press **C** repeatedly until the indication EXT2 appears on the screen.
- Press repeatedly on the **M** key of the remote control until VCR1 appears in a grey block.
- Switch your S-VHS recorder on.
- ▷ The picture stored in your video recorder from a pre-recorded cassette or from a TV channel is reproduced.

d. from equipment connected to the **right side** of the TV

- Switch your TV on.
- Press **C** repeatedly until the indication FRONT appears on the screen.
- Switch your equipment on.
- ▷ The picture is reproduced.
  Do you want to watch the TV picture again ?
- Enter the programme number of the TV channel which you want to watch with the digit keys.

Recording with your video recorder

1. Recording a TV programme

only using an **aerial** cable

- Select the programme number on your video recorder.
- Press record ● under the door of the remote control or on your video recorder.

using a **eurocable** connected to the euroconnector EXTERNAL 2

- Select the programme number on the TV.
- Press MENU.
- Press the corresponding colour key for RECORDING SOURCE in the MAIN MENU 2 menu.
- ▷ RECORDING SOURCE appears.
- Press the red key a.
- ▷ TV TO EXT 2 is displayed.
- Set your video recorder to record.
  (See the handbook for your video recorder.)
- Press record ● under the door of the remote control or on your video recorder.

using a **eurocable** connected to the euroconnector EXTERNAL 1

- Select the programme number on the TV.
- Set your video recorder to record.
  (See the handbook for your video recorder.)
- Press record ● under the door of the remote control or on your video recorder.

2. Recording a programme from connected peripheral equipment

- Switch on the equipment.
- Press MENU.
- Press the corresponding colour key for RECORDING SOURCE in the MAIN MENU 2 menu.
- ▷ RECORDING SOURCE appears.
- With the colour keys select the connection from which you want to record.
- ▷ Your selection lights up.
- Set your video recorder to record.
  (See the handbook for your video recorder.)
- Press record ● under the door on the remote control or on your video recorder.

RECORDING SOURCE
a ■ TV to EXT 2
b ■ EXT 1 to EXT 2
c ■ FRONT to EXT 2
select : a-c menu off

Table of TV frequencies.
Frequenztabelle der Fernsehsender.
Liste des fréquences des émetteurs.
Frequentietabel TV-zenders.
Tabella delle frequenze delle trasmittenti.
Lista de frequências.

Tabla de frecuencias de transmisión de televisión.
Frekvens oversigt.
Frekvenstabell.
Tabell över TV-frekvenser.
TV-taajuuksien taulukko.

EUROPA CHANNEL	FREQ (MHz)
E2	48.25
E3	55.25
E4	62.25

ITALY CANALE	FREQ (MHz)
A	53.75
B	62.25
C	82.25

FRANCE CANAL	FREQ (MHz)
2	55.75
3	60.50
4	63.75

S1	106.25
S2	112.25
S3	119.25
S4	126.25
S5	133.25
S6	140.25
S7	147.25
S8	154.25
S9	161.25
S10	168.25

EUROPA CHANNEL	FREQ (MHz)
E5	175.25
E6	182.25
E7	189.25
E8	196.25
E9	203.25
E10	210.25
E11	217.25
E12	224.25

ITALY CANALE	FREQ (MHz)
O	175.25
E	183.75
F	192.25
G	201.25
H	210.25
H1	217.25

CANAL	FREQ (MHz)
5	176.0
6	184.0
7	192.0
8	200.0
9	208.0
10	216.0

Canaux interbande	
B	116.75
C	128.75
D	140.75
E	152.75
F	164.75
G	176.75
H	188.75
I	200.75
J	212.75
K	224.75
L	236.75
M	248.75
N	260.75
O	272.75
P	284.75
Q	296.75

S11	231.25
S12	238.25
S13	245.25
S14	252.25
S15	259.25
S16	266.25
S17	273.25
S18	280.25
S19	287.25
S20	294.25

S21	303.25
S22	311.25
S23	327.25
S24	335.25
S25	351.25
S26	383.25
S27	375.25
S28	367.25
S29	399.25
S30	411.25
S31	423.25
S32	439.25
S33	447.25

H1	303.25
H2	311.25
H3	319.25
H4	327.25
H5	335.25
H6	343.25
H7	351.25
H8	359.25
H9	367.25
H10	375.25
H11	383.25
H12	391.25
H13	399.25
H14	407.25
H15	415.25
H16	423.25
H17	431.25
H18	439.25
H19	447.25

21	471.25
22	479.25
23	487.25
24	495.25
25	503.25
26	511.25
27	519.25
28	527.25
29	535.25
30	543.25
31	551.25
32	559.25
33	567.25
34	575.25
35	583.25
36	591.25
37	599.25
38	607.25
39	615.25
40	623.25
41	631.25
42	639.25
43	647.25
44	655.25

45	663.25
46	671.25
47	679.25
48	687.25
49	695.25
50	703.25
51	711.25
52	719.25
53	727.25
54	735.25
55	743.25
56	751.25
57	759.25
58	767.25
59	775.25
60	783.25
61	791.25
62	799.25
63	807.25
64	815.25
65	823.25
66	831.25
67	839.25
68	839.25
69	855.25

GB
The frequencies used by a cable company may differ from the frequencies on the table. Consult your cable company or your dealer for detailed information.

D
In Kabelfernsehanlagen können Abweichungen von den in den Frequenztabellen aufgeführten Frequenzen vorkommen. Bitte wenden Sie sich an Ihren Fachhändler oder Ihre Kabelfernsehgesellschaft, die Ihnen die zutreffenden Frequenzen mitteilt.

F
Les fréquences utilisées par une société de télédistribution peuvent être différentes de celles sur la liste des fréquences. Consultez votre société de télédistribution ou votre revendeur pour ces informations plus détaillées.

NL
De frequenties die gebruikt worden door een kabelmaatschappij kunnen verschillen van deze op de tabel. Raadpleeg uw kabelexploitant of uw handelaar voor meer informatie.

I
La frequenze usate da una società di teledistribuzione possono essere differenti da quelle sulla tabella. Consultate la società di teledistribuzione o il vostro rivenditore per informazioni specifiche.

E
Las frecuencias utilizadas por las empresas de distribución de señal por cable, pueden ser diferentes de las que se encuentran en esta tabla. Consulte con su compañía de distribución de televisión por cable o con su distribuidor para que le proporcionen una información más detallada.

P
As frequências utilizadas por uma sociedade de teledistribuição podem ser diferentes das indicadas na lista de frequências. Consultar a sociedade de teledistribuição ou o vendedor para informações mais detalhadas.

DK
Frekvenser benyttet af kabel operatører kan være afvigende fra disse, kontakt deres kabel operatør eller forhandler for nærmere information.

N
Frekvensene som benyttes på et kabelnett kan avvike fra de som er oppført i tabellen. Kontakt ditt kabel-TV selskap eller din forhandler for nærmere opplysninger.

S
Frekvenserna som används i kabel-TV-näten kan avvika från frekvenserna i tabellen. Kontakta ditt kabel-TV-bolag eller din radiohandlare för vidare information.

SF
Kaapeliyhtiöden käyttämät taajuudet voivat poiketa taulukossa olevista taajuuksista. Tarkat tiedot saat

10. Exploded view & Mechanical parts list

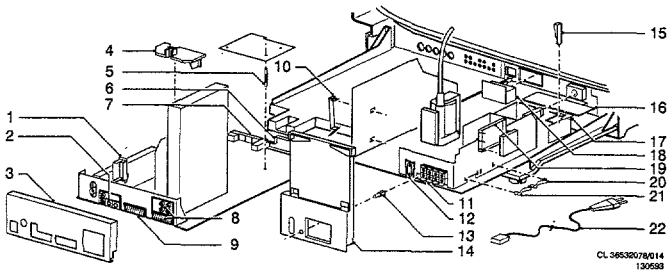

1	4822 256 91807	Holder for splitter
2	4822 267 41005	Cinch/2 x SVHS connector
2	4822 267 20409	Cinch/1 x SVHS connector
3	4822 432 93132	SSP cover
3	4822 432 92767	SSP cover -/39
3	4822 432 93138	SSP cover FL1.17
4	4822 404 31196	Bracket second tuner PIP
5	4822 404 31197	Spacer
6	4822 218 21084	Keyboard
7	4822 267 41004	Headph./cinch/ SVHS connector
7	4822 267 20408	Headph./cinch
8	4822 267 20427	Euro/4 x cinch connector
8	4822 267 20411	Euro/2 x cinch connector
9	4822 267 51058	Euroconnector
10	4822 492 70789	Spring
11	4822 290 60812	Connector for LS
12	4822 267 20417	Socket for LS
13	4822 410 25036	Mute knob
14	4822 432 92743	LSP cover
14	4822 432 92991	LSP cover FL1.17
15	4822 492 62067	Spring
16	4822 466 93027	Protection plate
17	4822 404 31167	bracket for mains cord
18	4822 466 93002	LED block
18	4822 130 91183	LED block FL1.17
19	4822 404 31202	Bracket for DAF panel
20	4822 492 70143	Spring
21	4822 492 70788	Spring
22	4822 321 10736	Mains cord

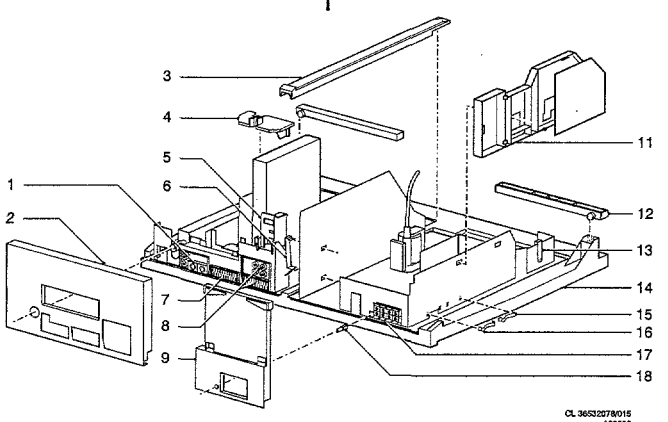

1	4822 267 41005	Cinch/SVHS connector
2	4822 466 93249	SSP cover
3	4822 404 31287	Bracket
4	4822 404 31196	Bracket for second tuner PIP
5	4822 256 91807	Holder for splitter
6	4822 492 70789	Spring
7	4822 267 51058	Euroconnector
8	4822 267 20427	Euro/4 x cinch connector
8	4822 267 20411	Euro/2 x cinch connector
9	4822 432 92695	LSP cover
10	4822 410 25036	Mute knob
11	4822 464 70616	Bracket for mains filter
12	4822 462 42016	Service stand
13	4822 492 62076	Spring
14	4822 464 70615	Frame for chassis
15	4822 492 70143	Spring
16	4822 492 70788	Spring
17	4822 290 60812	Connector for LS

	4822 265 30525	2P male white
	4822 265 20541	2P male black
	4822 265 31102	6P male
	4822 265 41328	10P male
	4822 290 40295	7P male
	4822 265 40818	8P male
	4822 265 40442	10P male
	4822 265 20509	2P grey
	4822 267 40985	6P male
	4822 264 40207	3P male
	4822 267 41018	2P red
	4822 265 40596	2P male
	4822 265 20512	2P green
	4822 265 20511	2P blue
	4822 265 31093	6P
	4822 265 41326	10P
▲	4822 265 30389	2P male
	4822 267 30871	2P female
	4822 266 20163	2P black

Various

	4822 466 93029	insulation plate
	4822 255 40527	insulator
	5322 390 20011	vet silic.P4 20GR
	4822 492 70143	spring 10X33mm
	4822 492 62076	spring fix transistor
	4822 492 70788	spring fix IC
	4822 492 70789	spring fix transistor
	4822 290 60812	socket for ext. loudsp.
	4822 267 20417	socket for squeeters
	4822 276 13094	switch loudsp. ON/OFF
	4822 256 30496	fuse holder
▲	4822 276 12998	mains switch
	4822 310 31932	SOPS repair kit
	4822 320 20162	EHT cable 28"-32"
	4822 320 11105	focus cable 28"
	4822 320 11106	focus cable 32"
	4822 320 11104	focus cable 32"
	4822 320 11103	focus cable 32"
	4822 320 20181	EHT cable 36"
	4822 320 20178	focus cable red 36"
	4822 320 20179	focus cable black 36"
	4822 320 20213	Vg2 cable 32"
1010	4822 212 23892	NTSC panel
1026	4822 102 90038	DAF unit 32"
1026	4822 101 11151	DAF unit 36"
1200▲	4822 070 33151	fuse 3,15A
1595	4822 218 21041	EHT bleeder 36"

⊣⊢

2000	4822 126 11823	270pF 10% 500V
2001	4822 122 31784	4,7nF 10% 50V
2002	4822 122 31784	4,7nF 10% 50V
2003	4822 126 11175	22pF 5% 50V
2007	4822 122 31797	22nF 10% 63V
2008	4822 122 31797	22nF 10% 63V
2009	4822 126 11175	22pF 5% 50V
2010	5322 122 33446	3,3nF 10% 63V
2011	4822 122 31775	680pF 2% 63V
2011	4822 122 32566	3,9nF 10% 63V
2012	4822 122 32927	220nF +80-20% 50V
2013	4822 122 32927	220nF +80-20% 50V
2014	5322 122 33446	3,3nF 10% 63V
2015	4822 124 42109	22µF 10% 50V
2016	4822 124 42109	22µF 10% 50V
2018	4822 122 31797	22nF 10% 63V
2019	4822 122 31414	10nF 100V

⊣⊢

2020	4822 122 31414	10nF 100V
2021	4822 122 31414	10nF 100V
2022	4822 122 31414	10nF 100V
2023	5322 122 33446	3,3nF 10% 63V
2024	5322 122 33446	3,3nF 10% 63V
2025	4822 122 10167	22nF 30% 25V
2026	4822 122 32927	220nF +80-20% 50V
2027	4822 122 32927	220nF +80-20% 50V
2028	4822 122 32927	220nF +80-20% 50V
2029	4822 122 32927	220nF +80-20% 50V
2030	4822 126 11175	22pF 5% 50V
2031	4822 126 11175	22pF 5% 50V
2032	4822 122 31797	22nF 10% 63V
2033	4822 122 10167	22nF 30% 25V
2034▲	4822 122 32442	10nF 50V
2035	4822 122 31775	680pF 2% 63V
2035	4822 122 32566	3,9nF 10% 63V
2036	4822 122 31773	560pF 2% 63V
2037	4822 122 31773	560pF 2% 63V
2038	4822 122 31644	2,2nF 10% 63V
2039	4822 122 31765	100pF 2% 63V
2040	4822 122 32927	220nF +80-20% 50V
2041	4822 122 32927	220nF +80-20% 50V
2043	4822 122 32927	220nF +80-20% 50V
2045	4822 122 32927	220nF +80-20% 50V
2046	4822 122 32927	220nF +80-20% 50V
2047	4822 122 32927	220nF +80-20% 50V
2049	4822 122 31765	100pF 2% 63V
2050	4822 124 42362	33µF 20% 16V
2051	4822 124 42362	33µF 20% 16V
2052	4822 124 42362	33µF 20% 16V
2053	4822 124 42362	33µF 20% 16V
2056	4822 122 31773	560pF 2% 63V
2057	4822 122 31773	560pF 2% 63V
2058	4822 122 31773	560pF 2% 63V
2059	4822 122 31773	560pF 2% 63V
2060	4822 122 32142	270pF 2% 63V
2065	4822 126 11156	684nF 20%
2066	4822 126 11156	684nF 20%
2070	4822 124 40272	33µF 20% 16V
2071	4822 124 23489	33µF 20% 25V
2072	4822 124 41584	100µF 20% 10V
2073	4822 124 21212	15µF 20% 40V
2074	5322 122 31647	1nF 10% 63V
2200▲	4822 121 43819	680nF 10% 250V
2203	4822 121 40487	100nF 10% 400V
2214	4822 124 23492	220µF 50% 385V
2215▲	4822 122 33665	3,3nF 20% 125V
2216▲	4822 126 12274	1500pF 10% 2kV
2231	4822 126 11157	470pF 10% 500V
2232	4822 124 40785	3300µF 20% 25V
2233	4822 126 11157	470pF 10% 500V
2234	4822 124 40785	3300µF 20% 25V
2235	4822 126 11157	470pF 10% 500V
2237▲	4822 126 12276	2200pF 10% 2kV
2238	4822 124 22583	47µF 160V
2240.	4822 124 42183	1000µF 20% 63V
2254	4822 126 11496	120pF 5% 2kV
2255	4822 122 32142	270pF 2% 63V
2258	5322 121 42502	390nF 5% 63V
2260	4822 122 31781	1500pF 10% 50V
2261	5322 124 21189	100µF 20% 40V
2262	4822 122 31727	470pF 2% 63V
2263	4822 124 80507	330µF 20%
2270	4822 124 41584	100µF 20% 10V

Large

⊣⊢

2272 4
2302 4
2303 4
2308 4
2321 4
2330 4
2331 4
2351 4
2360 4
2361 4
2365 5
2372 5
2376 4
2380 4
2381 4
2382 4
2386 5
2401 4
2402 4
2403 5
2404 4
2405 4
2406 4
2407 5
2408 4
2409 4
2410 4
2411 4
2412 4
2413 4
2415 4
2416 4
2417 4
2418 4
2419 4
2450▲ 4
2451 5
2452 4
2453 4
2455 4
2456 4
2456 4
2457 4
2458 4
2459 4
2460 4
2480 4
2502 4
2503 4
2504 4
2504▲ 4
2504▲ 4
2507 4
2509 4
2509 4
2510 4
2510 4
2511 4
2512 4
2513 4
2517 4
2518 4
2519 4
2520▲ 4
2521▲ 4
2522▲ 4
2523▲ 4
2523 5
2524 4
2524 4
2525 4
2526 4
2527 4
2529 4

Spare parts list / Stückliste / Liste des pièces

Large signal panel A B G FL1/2.14

⊣⊢

2272	4822 122 33496	100nF 10% 63V	
2302	4822 122 31965	220pF 2% 63V	
2303	4822 122 31767	150pF 2% 63V	
2308	4822 122 32891	68nF 10% 63V	
2321	4822 121 51319	1µF 10% 63V	
2330	4822 122 31784	4,7nF 10% 50V	
2331	4822 122 32891	68nF 10% 63V	
2351	4822 121 41854	150nF 5% 63V	
2360	4822 122 31981	33nF 5% 50V	
2361	4822 121 42589	82nF 5% 63V	
2365	5322 122 32838	82nF 10% 63V	
2372	5322 121 42502	390nF 5% 63V	
2376	4822 124 40272	33µF 20% 16V	
2380	4822 122 33496	100nF 10% 63V	
2381	4822 122 33496	100nF 10% 63V	
2382	4822 122 33496	100nF 10% 63V	
2386	5322 122 31647	1nF 10% 63V	
2401	4822 122 32542	47nF 10% 63V	
2402	4822 124 41577	4,7µF 20% 50V	
2403	5322 124 41431	22µF 20% 35V	
2404	4822 124 41577	4,7µF 20% 50V	
2405	4822 122 32542	47nF 10% 63V	
2406	4822 121 51091	1,2nF 2% 250V	
2407	5322 122 31647	1nF 10% 63V	
2408	4822 122 31172	180pF 10% 500V	
2409	4822 122 31797	22nF 10% 63V	
2410	4822 121 41854	150nF 5% 63V	
2411	4822 121 41854	150nF 5% 63V	
2412	4822 122 31173	220pF 10% 500V	
2413	4822 122 31768	180pF 2% 63V	
2415	4822 122 32542	47nF 10% 63V	
2416	4822 122 33496	100nF 10% 63V	
2417	4822 122 32808	1,2nF 10% 63V	
2418	4822 122 31797	22nF 10% 63V	
2419	4822 124 40849	330µF 20% 16V	
2450▲	4822 122 32442	10nF 50V	
2451	5322 122 31647	1nF 10% 63V	
2452	4822 124 41716	220µF 20% 35V	
2453	4822 122 33496	100nF 10% 63V	
2455	4822 122 31746	1000pF 2% 63V	
2456	4822 124 80457	3300µF 20% 35V	
2456	4822 124 80103	4700µF 20% 25V	
2457	4822 124 42249	1µF 10% 50V	
2458	4822 122 31797	22nF 10% 63V	
2459	4822 122 33496	100nF 10% 63V	
2460	4822 122 33496	100nF 10% 63V	
2480	4822 124 23495	10µF 20% 25V	
2502	4822 121 41689	100nF 10% 250V	
2503	4822 126 11823	270pF 10% 500V	
2504	4822 126 12084	390pF 10% 2kV	
2504▲	4822 126 12272	1000pF 10% 2kV	
2504▲	4822 126 12273	1200pF 10% 2kV	
2507	4822 121 41673	220nF 10% 100V	
2509	4822 122 40112	560pF 20% 500V	
2509	4822 122 31174	2,7nF 10% 500V	
2510	4822 126 12083	1nF 10% 500V	
2510	4822 126 11494	2,2nF 10% 500V	
2511	4822 124 41739	47µF 20% 160V	
2512	4822 124 40435	10µF 20% 50V	
2513	4822 124 40435	10µF 20% 50V	
2517	4822 126 11157	470pF 10% 500V	
2518	4822 124 22449	4,7µF 30% 350V	
2519	4822 124 80341	1µF 20% 160V	
2520▲	4822 121 43397	680nF 5% 250V	
2521▲	4822 121 43397	680nF 5% 250V	
2522▲	4822 121 43397	680nF 5% 250V	
2523▲	4822 122 33382	9,1nF 5% 2kV	
2523	5322 121 41603	10nF 5% 2kV	
2524	4822 121 70005	15nF 5% 630V	
2524	4822 121 70006	18nF 55 630V	
2525	4822 124 80604	47µF 20% 50V	
2526	4822 126 11502	470pF 10% 500V	
2527	4822 121 70005	15nF 5% 630V	
2529	4822 124 23491	0,47µF 20% 50V	

⊣⊢

2530	4822 122 31797	22nF 10% 63V	
2531	4822 121 40516	22nF 10% 250V	
2533	5322 122 32818	2,2nF 10% 100V	
2534	4822 126 12761	1,5nF 10% 500V	
2535	4822 124 23488	1000µF 20% 35V	
2536	4822 126 12761	1,5nF 10% 500V	
2537	4822 124 80037	1000µF 20% 16V	
2541	4822 124 23489	33µF 20% 25V	
2542	4822 124 22466	1µF 20% 50V	
2543	4822 124 23495	10µF 20% 25V	
2544▲	4822 124 41525	100µF 20% 25V	
2545	4822 122 33865	1nF 10% 500V	
2546	4822 126 11725	1µF 20% 50V	
2547	4822 122 32566	3,9nF 10% 63V	
2548	4822 126 11725	1µF 20% 50V	
2551	4822 124 40195	150µF 20% 16V	
2600	4822 124 41577	4,7µF 20% 50V	
2603	4822 122 33496	100nF 10% 63V	
2605	4822 122 31781	1500pF 10% 50V	
2606	4822 122 32542	47nF 10% 63V	
2606	4822 122 32541	27nF 10% 63V	
2606	4822 122 31797	22nF 10% 63V	
2609	4822 121 51243	56nF 5% 50V	
2609	5322 121 42386	100nF 5% 63V	
2610	4822 124 41576	2,2µF 20% 50V	
2611	4822 124 80603	4,7µF 20% 50V	
2612	4822 124 80603	4,7µF 20% 50V	
2613	4822 122 31784	4,7nF 10% 50V	
2615	4822 122 33498	2,7nF 10% 63V	
2801	4822 122 32153	1,8nF 10% 63V	
2805	4822 124 40435	10µF 20% 50V	
2806	4822 122 31797	22nF 10% 63V	

⊣⊢

3000	4822 051 10912	9k1 2% 0,25W	
3001	4822 051 10912	9k1 2% 0,25W	
3004	4822 051 10104	100k 2% 0,25W	
3005	4822 051 10104	100k 2% 0,25W	
3006	4822 051 10204	200k 2% 0,25W	
3009	4822 051 10204	200k 2% 0,25W	
3011	4822 051 10203	20k 2% 0,25W	
3012	4822 051 10203	20k 2% 0,25W	
3013	4822 116 52268	300k 5% 0,5W	
3014	4822 116 52268	300k 5% 0,5W	
3016▲	4822 052 10828	8Ω2 5% 0,33W	
3021▲	4822 052 10828	8Ω2 5% 0,33W	
3022▲	4822 052 10828	8Ω2 5% 0,33W	
3027	4822 051 10103	10k 2% 0,25W	
3028	4822 051 10103	10k 2% 0,25W	
3029	4822 051 10123	12k 2% 0,25W	
3030	4822 051 10123	12k 2% 0,25W	
3031	4822 051 10102	1k 2% 0,25W	
3032	4822 051 10102	1k 2% 0,25W	
3033	4822 116 52244	15k 5% 0,5W	
3034	4822 051 10472	4k7 2% 0,25W	
3035	4822 051 10153	15k 2% 0,25W	
3036	4822 051 10152	1k5 2% 0,25W	
3037	4822 051 10152	1k5 2% 0,25W	
3040	4822 051 10273	27k 2% 0,25W	
3041	4822 051 10152	1k5 2% 0,25W	
3043	4822 051 10203	20k 2% 0,25W	
3044	4822 051 10221	220Ω 2% 0,25W	
3049	4822 051 10102	1k 2% 0,25W	
3050	4822 051 10103	10k 2% 0,25W	
3051	4822 051 10203	20k 2% 0,25W	
3052	4822 051 10472	4k7 2% 0,25W	
3053	4822 051 10472	4k7 2% 0,25W	
3054▲	4822 053 21475	4M7 5% 0,5W	
3060	4822 051 10203	20k 2% 0,25W	
3061	4822 051 10201	200Ω 2% 0,25W	
3065	4822 051 10184	180k 2% 0,25W	
3066	4822 051 10184	180k 2% 0,25W	
3067	4822 116 52299	7k5 5% 0,5W	
3068	4822 116 52207	1k2 5% 0,5W	

⊣⊢

3069	4822 051 10622	6k2 2% 0,25W	
3072	4822 051 10479	47Ω 2% 0,25W	
3073	4822 051 10223	22k 2% 0,25W	
3074	4822 051 10103	10k 2% 0,25W	
3201▲	4822 053 21475	4M7 5% 0,5W	
3202▲	4822 053 21825	8M2 5% 0,5W	
3204▲	4822 116 40138	PTC	
3209▲	4822 113 80575	1Ω5 10% 5W	
3210	4822 116 52239	120k 5% 0,5W	
3211	4822 116 52239	120k 5% 0,5W	
3212	4822 116 52234	100k 5% 0,5W	
3213	4822 051 10823	82k 2% 0,25W	
3216▲	4822 115 90309	56Ω 10% 5W	
3235▲	4822 052 10108	1Ω 5% 0,33W	
3238	4822 116 52268	300k 5% 0,5W	
3238	4822 116 52234	100k 5% 0,5W	
3239	4822 116 52268	300k 5% 0,5W	
3239	4822 116 52234	100k 5% 0,5W	
3240	4822 116 52268	300k 5% 0,5W	
3240	4822 116 52234	100k 5% 0,5W	
3241	4822 113 80635	3,3Ω 10% 5W	
3242	4822 051 10122	1k2 2% 0,25W	
3243	4822 116 52226	560Ω 5% 0,5W	
3244	4822 051 10151	150Ω 2% 0,25W	
3245	4822 116 52226	560Ω 5% 0,5W	
3247	4822 051 52202	2k2 1% 0,125W	
3248	4822 051 52202	2k2 1% 0,125W	
3249	4822 116 52258	220k 5% 0,5W	
3250▲	4822 116 52198	62Ω 5% 0,5W	
3250▲	4822 116 52199	68Ω 5% 0,5W	
3251	4822 051 10102	1k 2% 0,25W	
3252	4822 116 52258	220k 5% 0,5W	
3253	4822 116 82738	10k 10%	
3255	4822 116 52243	1k5 5% 0,5W	
3266	4822 051 10151	150Ω 2% 0,25W	
3267	4822 051 10101	100Ω 2% 0,25W	
3268	4822 115 10129	27Ω 10% 5W	
3270	4822 051 10108	1Ω 5% 0,25W	
3271	4822 053 10399	39Ω 5% 1W	
3272	4822 051 51201	120Ω 1% 0,125W	
3273	4822 051 10472	4k7 2% 0,25W	
3275	4822 116 52206	120Ω 5% 0,5W	
3300	4822 053 10753	75k 5% 1W	
3304	4822 051 10473	47k 2% 0,25W	
3305	4822 051 10113	11k 2% 0,25W	
3306	4822 051 10823	82k 2% 0,25W	
3308	4822 053 12151	150Ω 5% 3W	
3309	4822 051 10103	10k 2% 0,25W	
3310	4822 116 52184	18Ω 5% 0,5W	
3311	4822 051 10471	470Ω 2% 0,25W	
3312	4822 051 10101	100Ω 2% 0,25W	
3313	4822 116 52184	18Ω 5% 0,5W	
3314	4822 116 52175	100Ω 5% 0,5W	
3317	4822 051 10682	6k8 2% 0,25W	
3320	4822 051 10471	470Ω 2% 0,25W	
3321	4822 051 10471	470Ω 2% 0,25W	
3322	4822 051 10471	470Ω 2% 0,25W	
3331	4822 116 52267	30k 5% 0,5W	
3332	4822 116 52233	10k 5% 0,5W	
3351	4822 052 11279	27Ω 5% 0,5W	
3356	4822 051 10751	750Ω 2% 0,25W	
3357	4822 050 21542	1k54 1% 0,6W	
3358	4822 116 52183	16Ω 5% 0,5W	
3359	4822 050 21602	1k6 1% 0,6W	
3360	4822 051 10122	1k2 2% 0,25W	
3362	4822 051 10151	150Ω 2% 0,25W	
3364	4822 051 10471	470Ω 2% 0,25W	
3365	4822 051 10221	220Ω 2% 0,25W	
3366	4822 051 10221	220Ω 2% 0,25W	
3368	4822 053 10271	270Ω 5% 1W	
3370	4822 051 10332	3k3 2% 0,25W	
3371	4822 100 11348	1k 30% lin	
3372	4822 051 10561	560Ω 2% 0,25W	
3373	4822 051 10153	15k 2% 0,25W	

⊣⊢

3374	4822 116 52301	75k 5% 0,5W	
3375▲	4822 051 10242	2k4 2% 0,25W	
3376	4822 116 52175	100Ω 5% 0,5W	
3378	4822 051 10101	100Ω 2% 0,25W	
3380	4822 051 10152	1k5 2% 0,25W	
3381	4822 051 10152	1k5 2% 0,25W	
3382	4822 051 10103	10k 2% 0,25W	
3383	4822 051 10103	10k 2% 0,25W	
3387	4822 051 10223	22k 2% 0,25W	
3402	4822 051 10562	5k6 2% 0,25W	
3403	4822 051 10229	22Ω 2% 0,25W	
3404	4822 051 10182	1k8 2% 0,25W	
3405	4822 051 10333	33k 2% 0,25W	
3406	4822 100 11483	10k 30% lin	
3407	4822 051 10561	560Ω 2% 0,25W	
3408	4822 051 10563	56k 2% 0,25W	
3409	4822 116 52265	270k 5% 0,5W	
3410	4822 051 10912	9k1 2% 0,25W	
3458▲	4822 116 83332	1Ω1 5% 0,5W	
3458▲	4822 116 80676	1Ω5 5% 0,5W	
3459▲	4822 116 80176	1Ω 5% 0,5W	
3459▲	4822 116 80676	1Ω5 5% 0,5W	
3460▲	4822 053 12181	180Ω 5% 3W	
3460▲	4822 053 11331	330Ω 5% 2W	
3460▲	4822 053 11271	270Ω 5% 2W	
3461	4822 116 80176	1Ω 5% 0,5W	
3462	4822 116 80176	1Ω 5% 0,5W	
3463	5322 116 82222	1Ω2 5% 0,5W	
3464	4822 053 10271	270Ω 5% 1W	
3464	4822 053 10102	1k 5% 1W	
3465	4822 051 10681	680Ω 2% 0,25W	
3467	4822 100 20166	10k 30% lin	
3468	4822 053 12181	180Ω 5% 3W	
3468	4822 053 12331	330Ω 5% 3W	
3473	4822 051 10109	10Ω 2% 0,25W	
3473	4822 051 10152	1k5 2% 0,25W	
3479	4822 051 10683	68k 2% 0,25W	
3480	4822 116 52234	100k 5% 0,5W	
3481	4822 051 10102	1k 2% 0,25W	
3482	4822 051 10229	22Ω 2% 0,25W	
3484	4822 051 10224	220k 2% 0,25W	
3485	4822 051 10102	1k 2% 0,25W	
3500	4822 116 52224	470Ω 5% 0,5W	
3501	4822 116 52274	36k 5% 0,5W	
3502	4822 116 52306	9k1 5% 0,5W	
3503	4822 116 52306	9k1 5% 0,5W	
3504	4822 116 52176	10Ω 5% 0,5W	
3505	4822 116 52229	750Ω 5% 0,5W	
3506	4822 053 11108	1Ω 5% 2W	
3507	4822 116 52184	18Ω 5% 0,5W	
3508▲	4822 116 60523	2k2 10% 5W	
3508	4822 116 82773	1k8 10% 5W	
3508	4822 116 83003	1k5 10% 5W	
3509	4822 053 20104	100k 5% 0,25W	
3510	4822 053 10681	680Ω 5% 1W	
3511▲	4822 052 10128	1Ω2 5% 0,33W	
3512	4822 051 10331	330Ω 2% 0,25W	
3513	4822 100 11319	4k7 30% lin	
3514	4822 116 52197	56Ω 5% 0,5W	
3515▲	4822 052 10108	1Ω 5% 0,33W	
3516▲	4822 052 10108	1Ω 5% 0,33W	
3517▲	4822 052 11108	1Ω 5% 0,5W	
3518	4822 116 52267	30k 5% 0,5W	
3519	4822 116 52267	30k 5% 0,5W	
3520▲	4822 052 11102	1k 5% 0,5W	
3521▲	4822 052 11102	1k 5% 0,5W	
3522	4822 117 10285	6,8Ω 5% 3W	
3523	4822 116 52233	10k 5% 0,5W	
3524	4822 116 52176	10Ω 5% 0,5W	
3525	4822 116 52207	1k2 5% 0,5W	
3526	4822 116 52306	9k1 5% 0,5W	
3527	4822 051 10102	1k 2% 0,25W	
3528	4822 050 11002	1k 1% 0,4W	
3528	4822 116 52253	2k 5% 0,5W	

ces

5 0,5W	3529	4822 051 10204	200k 2% 0,25W
5 0,25W	3530	4822 051 10474	470k 2% 0,25W
5% 0,5W	3531	4822 116 52274	36k 5% 0,5W
2% 0,25W	3532▲	4822 050 23301	330Ω 1% 0,6W
5 0,25W	3532	4822 116 52249	1k8 5% 0,5W
5 0,25W	3533▲	4822 050 23301	330Ω 1% 0,6W
5 0,25W	3534▲	4822 052 10128	1Ω2 5% 0,33W
5 0,25W	3535▲	4822 052 10128	1Ω2 5% 0,33W
5 0,25W	3536▲	4822 053 10331	330Ω 5% 1W
5 0,25W	3537	4822 116 52197	56Ω 5% 0,5W
5 0,25W	3538	4822 050 21303	13k 1% 0,6W
5 0,25W	3538	4822 050 28202	8k2 1% 0,6W
5 0,25W	3539▲	4822 052 10108	1Ω 5% 0,33W
% lin	3540	4822 116 52267	30k 5% 0,5W
2% 0,25W	3541▲	4822 116 52272	330k 5% 0,5W
5 0,25W	3542	4822 051 10104	100k 2% 0,25W
% 0,5W	3543	4822 051 20222	2k2 5% 0,1W
5 0,25W	3543	4822 051 10242	2k4 2% 0,25W
5 0,5W	3544	4822 051 10393	39k 2% 0,25W
5 0,5W	3545	4822 116 52208	130Ω 5% 0,5W
0,5W	3546	4822 051 10104	100k 2% 0,25W
5 0,5W	3547	4822 051 10109	10Ω 2% 0,25W
-% 3W	3548	4822 051 10392	3k9 2% 0,25W
% 2W	3549	4822 051 10124	120k 2% 0,25W
% 2W	3550	4822 051 10132	1k3 2% 0,25W
0,5W	3551	4822 051 10151	150Ω 2% 0,25W
0,5W	3552	4822 116 52207	1k2 5% 0,5W
5 0,5W	3553	4822 116 52207	1k2 5% 0,5W
-% 1W	3555	4822 113 80592	150Ω 10% 5W
1W	3556	4822 053 11108	1Ω 5% 2W
% 0,25W	3558	4822 051 10109	10Ω 2% 0,25W
% lin	3559	4822 051 10392	3k9 2% 0,25W
% 3W	3560	4822 113 80586	6Ω8 10% 5W
% 3W	3561	4822 051 58201	820Ω 1% 0,125W
5 0,25W	3562	4822 051 52202	2k2 1% 0,125W
0,25W	3563	4822 116 52175	100Ω 5% 0,5W
0,25W	3564	4822 051 10569	56Ω 2% 0,25W
% 0,5W	3570	4822 051 10122	1k2 2% 0,25W
0,25W	3570	4822 051 10272	2k7 2% 0,25W
5 0,25W	3601	4822 051 10104	100k 2% 0,25W
% 0,25W	3602	4822 100 11213	22k 30% lin
0,25W	3603	4822 051 10163	16k 2% 0,25W
% 0,5W	3603	4822 051 10123	12k 2% 0,25W
0,5W	3604	4822 051 10514	510k 2% 0,25W
0,5W	3604	4822 051 10624	620k 2% 0,25W
0,5W	3605	4822 051 10103	10k 2% 0,25W
0,5W	3605	4822 051 10203	20k 2% 0,25W
% 0,5W	3606	4822 051 10223	22k 2% 0,25W
2W	3607	4822 100 11213	22k 30% lin
0,5W	3608	4822 051 10103	10k 2% 0,25W
5 5W	3609	4822 051 10473	47k 2% 0,25W
5 5W	3610	4822 051 10472	4k7 2% 0,25W
5 5W	3611	4822 116 52256	2k2 5% 0,5W
5 0,25W	3612	4822 116 52283	4k7 5% 0,5W
% 1W	3613	4822 051 10202	2k 2% 0,25W
0,33W	3614	4822 116 52249	1k8 5% 0,5W
% 0,25W	3615	4822 116 52224	470Ω 5% 0,5W
5 lin	3616	4822 051 10332	3k3 2% 0,25W
0,5W	3617	4822 051 20222	2k2 5% 0,1W
0,33W	3618	4822 051 10683	68k 2% 0,25W
0,33W	3619	4822 051 20222	2k2 5% 0,1W
0,5W	3620	4822 051 10622	6k2 2% 0,25W
0,5W	3620	4822 051 10682	6k8 2% 0,25W
0,5W	3621	4822 051 10114	110k 2% 0,25W
,5W	3622	4822 116 80176	1Ω 5% 0,5W
,5W	3623	4822 116 80176	1Ω 5% 0,5W
3W	3627	4822 051 10202	2k 2% 0,25W
0,5W	3628	4822 051 10473	47k 2% 0,25W
0,5W	3629	4822 051 10474	470k 2% 0,25W
0,5W	3629	4822 051 10624	620k 2% 0,25W
0,5W	3630	4822 051 10103	10k 2% 0,25W
.25W	3632	4822 051 10134	130k 2% 0,25W
.4W	3633	4822 051 10271	270Ω 2% 0,25W
.5W	3633	4822 051 10102	1k 2% 0,25W

3634	4822 051 10473	47k 2% 0,25W
3650	4822 051 20183	18k 5% 0,1W
3651	4822 051 10102	1k 2% 0,25W
3652	4822 051 10822	8k2 2% 0,25W
3653	4822 051 20183	18k 5% 0,1W
3653	4822 051 10104	100k 2% 0,25W
3654	4822 051 20222	2k2 5% 0,1W
3655	4822 051 20222	2k2 5% 0,1W
3656	4822 051 10103	10k 2% 0,25W
3800	4822 116 52289	5k6 5% 0,125W
3801	4822 051 10184	180k 2% 0,25W
3802	4822 051 10104	100k 2% 0,25W
3803	4822 051 20222	2k2 5% 0,1W
3804	4822 051 10103	10k 2% 0,25W
3805▲	4822 111 41424	22Ω 5% 0,3W
3806	4822 051 20222	2k2 5% 0,1W
3807	4822 116 52256	2k2 5% 0,5W
3809	4822 051 10104	100k 2% 0,25W
3810	4822 116 52176	10Ω 5% 0,5W
3811▲	4822 116 52215	220Ω 5% 0,5W

Jumper

4000	4822 051 10008	0Ω 5% 0,25W
4001	4822 051 10008	0Ω 5% 0,25W
4002	4822 051 10008	0Ω 5% 0,25W
4003	4822 051 10008	0Ω 5% 0,25W
4004	4822 051 10008	0Ω 5% 0,25W
4006	4822 051 10008	0Ω 5% 0,25W
4007	4822 051 10008	0Ω 5% 0,25W
4061	4822 051 10008	0Ω 5% 0,25W
4074	4822 051 10008	0Ω 5% 0,25W
4268	4822 051 10008	0Ω 5% 0,25W
4274	4822 051 10008	0Ω 5% 0,25W
4402	4822 051 10008	0Ω 5% 0,25W
4403	4822 051 10008	0Ω 5% 0,25W
4404	4822 051 10008	0Ω 5% 0,25W
4406	4822 051 10008	0Ω 5% 0,25W
4407	4822 051 10008	0Ω 5% 0,25W
4408	4822 051 10008	0Ω 5% 0,25W
4409	4822 051 10008	0Ω 5% 0,25W
4511	4822 051 10008	0Ω 5% 0,25W
4512	4822 051 10008	0Ω 5% 0,25W
4530	4822 051 10008	0Ω 5% 0,25W
4531	4822 051 10008	0Ω 5% 0,25W
4533	4822 051 10008	0Ω 5% 0,25W
4601	4822 051 10008	0Ω 5% 0,25W
4802	4822 051 10008	0Ω 5% 0,25W
4803	4822 051 10008	0Ω 5% 0,25W
4804	4822 051 10008	0Ω 5% 0,25W

5202	4822 157 10291	mainsfilter CU28D5
5230▲	4822 148 81192	SOPS transf.
5237	4822 526 10494	ferrite bead
5241	4822 157 62412	27µH 10%
5255▲	4822 148 81225	µSOPS transf.
5260	4822 526 10494	ferrite bead
5308	4822 157 63302	150µH 10%
5310	4822 157 63301	1µH 15%
5381▲	4822 157 52265	100µH 10%
5503	4822 157 63252	line driver
5505	4822 157 51588	0,82µH 20%
5506	4822 157 51588	0,82µH 20%
5507	4822 157 63506	0,09µH
5510	4822 157 62886	33µH 10%
5511	4822 157 52407	39µH 7,5%
5514	4822 157 63256	DC-shift
5520▲	4822 157 63846	linearity corr. 28"
5520▲	4822 156 50091	linearity corr. 32"
5520▲	4822 157 63514	linearity coil 36"
5521▲	4822 157 63847	bridge coil
5521▲	4822 157 63512	linearity corr. 36"
5524	4822 526 10494	ferrite bead

5525	4822 157 52392	27µH 10%
5526▲	4822 157 63513	E/W coil
5527	4822 157 70472	0,56µH 20%
5534	4822 158 10551	27µH 7,5%
5543	4822 157 62412	27µH 10%
5555▲	4822 140 10444	L.O.T. 28"
5555▲	4822 140 10432	L.O.T. 32"
5555▲	4822 140 10426	L.O.T. 36"

6000	4822 130 80446	LL4148
6001	4822 130 80446	LL4148
6008	4822 209 73095	P4KE30C-7000
6010	4822 130 80446	LL4148
6011	4822 130 80446	LL4148
6012	4822 130 80446	LL4148
6016	4822 130 80446	LL4148
6017	4822 130 80446	LL4148
6021	4822 130 80446	LL4148
6201	4822 130 80446	LL4148
6210	4822 130 33887	GP15J-16
6211	4822 130 33887	GP15J-16
6212	4822 130 33887	GP15J-16
6213	4822 130 33887	GP15J-16
6216	4822 130 42606	BYD33J
6220	4822 130 33887	GP15J-16
6221	4822 130 33887	GP15J-16
6230	4822 130 33529	BY229F-200
6232	4822 130 33529	BY229F-200
6235	4822 130 81104	MA689
6237▲	4822 130 41602	BYW95C/20
6238▲	4822 130 41602	BYW95C/20
6246	4822 130 82347	LLZ-F6V8
6251	4822 130 80954	LLZ-C5V6
6260	4822 130 80446	BAS32L
6262	4822 130 83121	BYD73C
6266	4822 130 34278	BZX79-F6V8
6272	4822 130 34173	BZX55-B5V6
6280▲	4822 130 30621	1N4148
6302	4822 130 80446	LL4148
6303	4822 130 80446	LL4148
6304	4822 130 81637	PMLL4148L
6305	4822 130 82334	BAS85
6306	4822 130 34499	BZX79-C20
6308	4822 130 42488	BYD33D
6312	4822 130 42488	BYD33D
6314	4822 130 80446	LL4148
6315	4822 130 80446	LL4148
6318	4822 130 83086	LL4150
6319	5322 130 34898	BZD23-C5V6
6331▲	4822 130 30621	1N4148
6349	4822 130 80446	LL4148
6350	4822 130 80446	LL4148
6351▲	4822 130 30621	1N4148
6352	4822 130 80446	LL4148
6353	4822 130 80446	LL4148
6355	4822 130 80446	LL4148
6356	4822 130 82345	LLZ-C22
6357	4822 130 80446	LL4148
6370	4822 130 81512	LLZ-C6V2
6371	4822 130 80446	LL4148
6372	4822 130 80446	LL4148
6373	4822 130 82583	LLZ-C9V1
6375	4822 130 80446	LL4148
6376	4822 130 80922	LLZ-C18
6403	4822 130 80446	LL4148
6404	4822 130 80446	LL4148
6417	4822 130 81223	LLZ-C2V4
6422	4822 130 80446	LL4148
6440▲	4822 130 30621	1N4148
6441	4822 130 80446	LL4148
6451▲	4822 130 61219	BZX79-C10
6452	4822 130 42488	BYD33D
6480	4822 130 31554	BZX79-C4V3

6506▲	5322 130 32184	BYV27-50
6515	4822 130 42488	BYD33D
6516	4822 130 42488	BYD33D
6517	4822 130 42488	BYD33D
6519	4822 130 32896	BYD33M
6520	4822 130 32896	BYD33M
6526▲	4822 130 33531	BY229F-600
6527	4822 130 83185	BY359F-1500
6529	4822 130 34329	BZX79-C43
6530	4822 130 30842	BAV21
6534	4822 130 82512	BYV29F-400
6536	4822 130 82758	BYV29F-300
6542	4822 130 42488	BYD33D
6546	4822 130 80446	LL4148
6547▲	4822 130 30621	1N4148
6551	4822 130 83004	BZX79-A3V9
6570	4822 130 80922	LLZ-C18
6611	4822 130 81027	LLZ-C11
6633	4822 130 81512	LLZ-C6V2
6650	4822 130 82583	LLZ-C9V1
6651	4822 130 80446	LL4148
6801	4822 130 80446	LL4148
6802	5322 130 34337	BAV99
6803	4822 130 80446	LL4148
6804	4822 130 80446	LL4148

7000	4822 209 73311	TDA1521Q/N4
7001	4822 209 73311	TDA1521Q/N4
7002▲	4822 209 83163	LM833N
7003	4822 130 61207	BC848
7005	5322 130 42136	BC848C
7006	5322 130 42136	BC848C
7007	4822 130 61207	BC848
7008	4822 130 61207	BC848
7009▲	4822 209 83163	LM833N
7010	5322 130 42012	BC858
7011	4822 209 63913	TDA1521 AQ/N4
7012	4822 130 61207	BC848
7013	4822 130 61207	BC848
7201	5322 130 42756	BC857C
7216	4822 130 63366	ON4802
7241	4822 130 61003	BD944F
7242	4822 130 40948	BC548A
7243	4822 130 40948	BC548A
7250	4822 130 62509	BUX85F
7251	4822 130 61207	BC848
7268	4822 130 62742	BD943F
7270	4822 130 40823	BD135
7273	4822 130 42513	BC858C
7274	4822 130 42513	BC858C
7305	5322 130 42136	BC848C
7311	4822 130 42513	BC858C
7312	4822 130 40982	BD437
7312	4822 130 62955	ON4703-BD437
7318	4822 130 42615	BC817-40
7320▲	4822 130 82034	CNX83A
7360	4822 130 42513	BC858C
7369	5322 130 42755	BC847C
7370	5322 130 42136	BC848C
7371	4822 130 42513	BC858C
7380	4822 130 42513	BC858C
7381	5322 130 42136	BC848C
7384	5322 130 42755	BC847C
7400	4822 209 30402	TDA2579B/N2/S1
7402	5322 130 42136	BC848C
7417	4822 130 42513	BC858C
7443	4822 130 61207	BC848
7444	4822 130 61207	BC848
7450	4822 209 73308	TDA3654Q/N3
7450	4822 209 30403	TDA3654Q/N3/S1
7451	5322 130 42012	BC858A
7469	4822 130 44283	BC636

Spare parts list / Stückliste / Liste des pièces

7480	4822 130 42513	BC858C
7481	5322 130 42136	BC848C
7501	4822 130 63316	BSN304
7506	4822 130 62843	2SC4288A
7512▲	4822 130 41344	BC337-40
7513	4822 130 41327	BC327-40
7530	4822 130 61233	BC857
7540	5322 130 42755	BC847C
7541	5322 130 42755	BC847C
7542	5322 130 42756	BC857C
7543	4822 130 60136	BC856
7550	4822 130 61003	BD944F
7551	4822 130 62846	ON4590
7552	4822 130 62846	ON4590
7601	4822 130 61207	BC848
7602	5322 130 42012	BC858
7603	5322 130 42012	BC858
7608	4822 130 44503	BC547C
7610	4822 130 62845	BDT60F
7616	5322 130 42136	BC848C
7618	5322 130 42136	BC848C
7650	5322 130 42136	BC848C
7651	5322 130 42136	BC848C
7652	5322 130 42136	BC848C
7800	5322 209 10576	4053B
7801	4822 130 61207	BC848
7802	4822 130 61207	BC848

Large signal panel A B G FL1.16/.17-FL2.16

	4822 266 30359	6P female
	4822 265 40472	10P female gold plated
	4822 290 40295	7P male
	4822 265 40818	8P male
	4822 267 40985	6P male
	4822 264 40207	3P male
▲	4822 265 30389	2P male
▲	4822 265 40596	2P male
	4822 265 20509	2P grey
	4822 265 20512	2P green
	4822 265 20511	2P blue
	4822 265 30953	6P male
	4822 264 50149	10P male gold plated
	4822 265 30984	5P female

Various

	4822 492 70143	spring 10x33mm
	4822 492 62076	spring fix transistor
	4822 492 70788	spring fix IC
	4822 492 70789	spring fix transistor
▲	4822 276 12998	mains switch
▲	4822 256 30496	fuse holder
	5322 390 20011	vet silic.P4 20GR
	4822 290 60812	socket for ext. loudsp.
	4822 276 13094	switch loudsp. ON/OFF
	4822 267 20417	socket for squeeters
1010	4822 212 30195	NTSC panel
1200▲	4822 070 33152	fuse 3,15A

2001	4822 122 31784	4,7nF 10% 50V
2002	4822 122 31784	4,7nF 10% 50V
2003	4822 126 11175	22pF 5% 50V
2004	4822 122 32142	270pF 2% 63V
2005	4822 122 32142	270pF 2% 63V
2007	4822 122 31797	22nF 10% 63V
2008	4822 122 31797	22nF 10% 63V
2009	4822 126 11175	22pF 5% 50V
2010	5322 122 33446	3,3nF 10% 63V
2011	4822 122 32566	3,9nF 10% 63V
2011	4822 122 31775	680pF 2% 63V
2012	4822 122 32927	220nF +80-20% 50V
2013	4822 122 32927	220nF +80-20% 50V
2014	5322 122 33446	3,3nF 10% 63V
2015	4822 124 42109	22µF 10% 50V
2016	4822 124 42109	22µF 10% 50V
2018	4822 122 31797	22nF 10% 63V
2019	4822 126 12816	10nF +80-20% 100V
2020	4822 126 12816	10nF +80-20% 100V
2021	4822 126 12816	10nF +80-20% 100V
2022	4822 126 12816	10nF +80-20% 100V
2023	5322 122 33446	3,3nF 10% 63V
2024	5322 122 33446	3,3nF 10% 63V
2025	4822 122 10167	22nF 30% 25V
2026	4822 122 32927	220nF +80-20% 50V
2027	4822 122 32927	220nF +80-20% 50V
2028	4822 122 32927	220nF +80-20% 50V
2029	4822 122 32927	220nF +80-20% 50V
2030	4822 126 11175	22pF 5% 50V
2031	4822 126 11175	22pF 5% 50V
2032	4822 122 31797	22nF 10% 63V
2033	4822 122 10167	22nF 30% 25V
2034	4822 122 32862	10nF 80% 50V
2035	4822 122 32566	3,9nF 10% 63V
2035	4822 122 31775	680pF 2% 63V
2036	4822 122 31773	560pF 2% 63V
2037	4822 122 31773	560pF 2% 63V
2038	4822 122 31644	2,2nF 10% 63V
2039	4822 122 31765	100pF 2% 63V
2040	4822 122 32927	220nF +80-20% 50V
2041	4822 122 32927	220nF +80-20% 50V
2043	4822 122 32927	220nF +80-20% 50V
2045	4822 122 32927	220nF +80-20% 50V
2046	4822 122 32927	220nF +80-20% 50V
2047	4822 122 32927	220nF +80-20% 50V
2049	4822 122 31965	220pF 2% 63V
2050	4822 124 40433	47µF 20% 25V
2051	4822 124 40433	47µF 20% 25V
2052	4822 124 40433	47µF 20% 25V
2053	4822 124 40433	47µF 20% 25V
2056	4822 122 31773	560pF 2% 63V
2057	4822 122 31773	560pF 2% 63V
2058	4822 122 31773	560pF 2% 63V
2059	4822 122 31773	560pF 2% 63V
2060	4822 122 31773	560pF 2% 63V
2065	4822 126 11156	684nF 20%
2066	4822 126 11156	684nF 20%
2070	4822 124 40272	33µF 20% 16V
2071	4822 124 23489	33µF 20% 25V
2072	4822 124 41584	100µF 20% 10V
2073	4822 124 21212	15µF 20% 40V
2074	5322 122 31647	1nF 10% 63V
2200▲	4822 121 43819	680nF 10% 250V
2203▲	4822 121 40487	100nF 10% 400V
2210	4822 126 11141	2,2nF 10% 1kV
2211	4822 126 11141	2,2nF 10% 1kV
2214	4822 124 23492	220µF 50% 385V
2215▲	4822 122 33665	3,3nF 20% 125V
2216▲	4822 126 12274	1500pF 10% 2kV
2230	4822 122 32856	8,2nF 10% 63V
2231	4822 126 11157	470pF 10% 500V
2232	4822 124 40785	3300µF 20% 25V
2233	4822 126 11157	470pF 10% 500V
2234	4822 124 40785	3300µF 20% 25V
2235	4822 126 11157	470pF 10% 500V
2236	4822 124 80215	1000µF 20% 35V
2237▲	4822 126 12276	2200pF 10%R 2kV
2238	4822 124 22583	47µF 160V
2241	5322 124 41431	22µF 20% 35V
2254	4822 126 11496	120pF 5% 2kV
2255	4822 122 32142	270pF 2% 63V
2258	5322 121 42502	390nF 5% 63V
2260	4822 122 31781	1500pF 10% 50V
2261	4822 124 40255	100µF 20% 63V
2262	4822 122 31727	470pF 2% 63V
2263	4822 124 80605	330µF 20% 50V
2270	4822 124 41584	100µF 20% 10V
2272	4822 122 33496	100nF 10% 63V
2302	4822 122 31965	220pF 2% 63V
2303	4822 122 31767	150pF 2% 63V
2308	4822 122 32891	68nF 10% 63V
2321	4822 121 51319	1µF 10% 63V
2331	4822 122 32891	68nF 10% 63V
2351	4822 121 41854	150nF 5% 63V
2360	4822 122 31981	33nF +-0,5pF 50V
2361	4822 121 42589	82nF 5% 63V
2365	5322 122 32838	82nF 10% 63V
2372	5322 121 42502	390nF 5% 63V
2376	5322 124 41378	33µF 20% 35V
2380	4822 122 33496	100nF 10% 63V
2381	4822 122 33496	100nF 10% 63V
2382	4822 122 33496	100nF 10% 63V
2386	5322 122 31647	1nF 10% 63V
2401	4822 122 32542	47nF 10% 63V
2402	4822 124 41576	2,2µF 20% 50V
2403	5322 124 41431	22µF 20% 35V
2404	4822 124 41577	4,7µF 20% 50V
2405	4822 122 32542	47nF 10% 63V
2406	4822 121 51091	1,2nF 2% 250V
2407	4822 122 32153	1,8nF 10% 63V
2408	4822 126 11823	270pF 10% 500V
2409	4822 122 31797	22nF 10% 63V
2410	4822 121 41854	150nF 5% 63V
2411	4822 121 41854	150nF 5% 63V
2412	4822 126 11966	100pF 10% 500V
2415	4822 122 32542	47nF 10% 63V
2416	4822 122 33496	100nF 10% 63V
2417	4822 122 32808	1,2nF 10% 63V
2418	4822 122 31797	22nF 10% 63V
2419	4822 124 40849	330µF 20% 16V
2450▲	4822 122 32442	10nF 50V
2451	4822 122 31746	1000pF 2% 63V
2452	4822 124 41716	220µF 20% 35V
2455	4822 122 31771	390pF 2% 63V
2456	4822 124 41334	470µF 20% 35V
2456	4822 124 41747	680µF 20% 35V
2457	4822 124 42251	1,5µF 10% 50V
2458	4822 122 31797	22nF 10% 63V
2459	4822 122 32891	68nF 10% 63V
2460	4822 122 33496	100nF 10% 63V
2480	4822 124 80214	22µF 20% 25V
2502	4822 121 41689	100nF 10% 250V
2503	4822 126 11157	470pF 10% 500V
2504▲	4822 126 12239	560pF 10% 2kV
2505▲	4822 126 12269	680pF 10% 2kV
2509▲	4822 126 12273	1200pF 10% 2kV
2511	4822 121 43368	47µF 160V
2512	4822 124 41596	22µF 20% 50V
2513	4822 124 41596	22µF 20% 50V
2517	4822 126 11157	470pF 10% 500V
2518	4822 124 22449	4,7µF 30% 350V
2519	4822 124 80341	1µF 20% 160V
2520▲	4822 121 51528	470nF 5% 250V
2520	4822 121 70281	510nF 5% 400V
2521	4822 121 51563	560nF 5% 250V
2523	4822 122 50118	8,2nF
2524	4822 121 43915	27nF 5% 630V
2529	4822 124 22467	2,2µF 20% 50V
2530	4822 122 31797	22nF 10% 63V
2531	4822 121 40516	22nF 10% 250V
2533	5322 122 32818	2,2nF 10% 100V
2534	4822 126 11502	470pF 10% 500V
2535	4822 124 23488	1000µF 20% 35V
2536	4822 122 31175	1nF 10% 500V
2537	4822 124 40201	1000µF 20% 16V
2541	4822 124 23489	33µF 20% 25V
2542	4822 124 22466	1µF 20% 50V
2543	4822 124 23495	10µF 20% 25V
2546	4822 122 33496	100nF 10% 63V
2547	4822 122 33498	2,7nF 10% 63V
2552	4822 122 33496	100nF 10% 63V
2553	4822 122 33496	100nF 10% 63V
2554▲	4822 124 41525	100µF 20% 25V
2555	4822 122 32891	68nF 10% 63V
2556	4822 124 41584	100µF 20% 10V
2600	4822 124 41577	4,7µF 20% 50V
2601	4822 122 31797	22nF 10% 63V
2603	4822 122 32891	68nF 10% 63V
2603	4822 122 32542	47nF 10% 63V
2603	4822 122 33496	100nF 10% 63V
2605	4822 122 31781	1500pF 10% 50V
2605	4822 122 33498	2,7nF 10% 63V
2605	4822 122 31644	2,2nF 10% 63V
2606	4822 122 33496	100nF 10% 63V
2609	4822 121 43396	120nF 5% 63V
2610	4822 124 41576	2,2µF 20% 50V
2611	4822 124 40763	2,2µF 20% 100V
2613	4822 122 31784	4,7nF 10% 50V
2615	4822 122 10175	2,2nF 10% 50V

3000	4822 051 10912	9k1 2% 0,25W
3001	4822 051 10912	9k1 2% 0,25W
3001	4822 051 10153	15k 2% 0,25W
3004	4822 051 10104	100k 2% 0,25W
3005	4822 051 10104	100k 2% 0,25W
3006	4822 051 10204	200k 2% 0,25W
3009	4822 051 10204	200k 2% 0,25W
3011	4822 051 10203	20k 2% 0,25W
3012	4822 051 10203	20k 2% 0,25W
3013	4822 116 52268	300k 5% 0,5W
3014	4822 116 52268	300k 5% 0,5W
3016▲	4822 052 10828	8Ω2 5% 0,33W
3021▲	4822 052 10828	8Ω2 5% 0,33W
3022▲	4822 052 10828	8Ω2 5% 0,33W
3027	4822 051 10103	10k 2% 0,25W
3028	4822 051 10103	10k 2% 0,25W
3029	4822 051 10123	12k 2% 0,25W
3030	4822 051 10123	12k 2% 0,25W
3031	4822 051 10102	1k 2% 0,25W
3032	4822 051 10102	1k 2% 0,25W
3033	4822 116 52244	15k 5% 0,5W
3034	4822 051 10472	4k7 2% 0,25W
3035	4822 051 10153	15k 2% 0,25W
3036	4822 051 10152	1k5 2% 0,25W
3037	4822 051 10152	1k5 2% 0,25W
3040	4822 051 10273	27k 2% 0,25W
3041	4822 051 10152	1k5 2% 0,25W
3043	4822 051 10203	20k 2% 0,25W
3044	4822 051 10221	220Ω 2% 0,25W
3049	4822 051 10102	1k 2% 0,25W
3050	4822 051 10103	10k 2% 0,25W
3051	4822 051 10203	20k 2% 0,25W
3052	4822	
3053	4822	
3054▲	4822	
3060	4822	
3061	4822	
3065	4822	
3066	4822	
3067	4822	
3068	4822	
3069	4822	
3072	4822	
3073	4822	
3074	4822	
3201▲	4822	
3202▲	4822	
3203	4822	
3204	4822	
3209▲	4822	
3210	4822	
3211	4822	
3212	4822	
3213	4822	
3216▲	4822	
3230▲	4822	
3234	4822	
3235▲	4822	
3236	4822	
3237	4822	
3239	4822	
3240	4822	
3241	4822	
3243▲	4822	
3247	4822	
3248	4822	
3249	4822	
3250▲	4822	
3250	4822	
3251	4822	
3252	4822	
3253	4822	
3255	4822	
3266	4822	
3267	4822	
3268	4822	
3270	4822	
3271	4822	
3272	4822	
3273	4822	
3275	4822	
3300	4822	
3304	4822	
3305	4822	
3306	4822	
3308	4822	
3309	4822	
3310	4822	
3311	4822	
3312	4822	
3313	4822	
3314	4822	
3317	4822	
3320	4822	
3321	4822	
3322	4822	
3331	4822	
3332	4822	
3351	4822	
3356	4822	
3357	4822	
3358	4822	
3360	4822	
3362	4822	
3364	4822	

10% 500V	3052	4822 051 10472	4k7 2% 0,25W
0% 350V	3053	4822 051 10472	4k7 2% 0,25W
% 160V	3054▲	4822 053 21475	4M7 5% 0,5W
5% 250V	3060	4822 051 10203	20k 2% 0,25W
5% 400V	3061	4822 051 10201	200Ω 2% 0,25W
5% 250V	3065	4822 051 10184	180k 2% 0,25W
	3066	4822 051 10184	180k 2% 0,25W
% 630V	3067	4822 116 52289	5k6 5% 0,5W
0% 50V	3068	4822 116 52207	1k2 5% 0,5W
0% 63V	3069	4822 051 10272	2k7 2% 0,25W
0% 250V	3072	4822 051 10479	47Ω 2% 0,25W
0% 100V	3073	4822 116 52257	22k 5% 0,5W
10% 500V	3074	4822 051 10103	10k 2% 0,25W
20% 35V	3201▲	4822 053 21475	4M7 5% 0,5W
% 500V	3202▲	4822 053 21825	8M2 5% 0,5W
20% 16V	3203	4822 111 41573	470Ω 10% 0,5W
0% 25V	3204	4822 116 40138	PTC
% 50V	3204	4822 116 40215	PTC/NTC
0% 25V	3209▲	4822 113 80603	1,5Ω 10% 7W
10% 63V	3210	4822 116 52239	120k 5% 0,5W
0% 63V	3211	4822 116 52239	120k 5% 0,5W
10% 63V	3212	4822 116 52234	100k 5% 0,5W
10% 63V	3213	4822 051 10823	82k 2% 0,25W
20% 25V	3216▲	4822 115 90309	56Ω 10% 5W
0% 63V	3230▲	4822 052 10108	1Ω 5% 0,33W
20% 10V	3234	4822 100 11348	1k 30% lin
20% 50V	3235▲	4822 051 10008	0Ω 5% 0,25W
0% 63V	3236	4822 051 10681	680Ω 2% 0,25W
0% 63V	3237	4822 051 10101	100Ω 2% 0,25W
0% 63V	3239	4822 116 52297	68k 5% 0,5W
10% 63V	3240	4822 116 52297	68k 5% 0,5W
10% 50V	3241	4822 113 80602	5,6Ω 10% 5W
0% 63V	3243▲	4822 053 10221	220Ω 5% 1W
0% 63V	3247	4822 051 10122	1k2 2% 0,25W
10% 63V	3248	4822 051 10562	5k6 2% 0,25W
5% 63V	3249	4822 116 52258	220k 5% 0,5W
0% 50V	3250▲	4822 116 52199	68Ω 5% 0,5W
0% 100V	3250	4822 116 52198	62Ω 5% 0,5W
0% 50V	3251	4822 051 10102	1k 2% 0,25W
0% 50V	3252	4822 116 52258	220k 5% 0,5W
	3253	4822 116 82738	10k 10% 5W
	3255	4822 116 52243	1k5 5% 0,5W
0,25W	3266	4822 051 10151	150Ω 2% 0,25W
0,25W	3267	4822 051 10101	100Ω 2% 0,25W
0,25W	3268	4822 115 10129	27Ω 10% 5W
% 0,25W			
% 0,25W	3270	4822 051 10108	1Ω 5% 0,25W
	3271	4822 053 10399	39Ω 5% 1W
% 0,25W	3272	4822 051 51201	120Ω 1% 0,125W
% 0,25W	3273	4822 051 10472	4k7 2% 0,25W
0,25W	3275	4822 116 52206	120Ω 5% 0,5W
0,25W			
% 0,5W	3300	4822 053 10753	75k 5% 1W
	3304	4822 051 10473	47k 2% 0,25W
% 0,5W	3305	4822 051 10113	11k 2% 0,25W
0,33W	3306	4822 051 10823	82k 2% 0,25W
0,33W	3308	4822 053 12151	150Ω 5% 3W
0,33W			
0,25W	3309	4822 051 10103	10k 2% 0,25W
	3310	4822 116 52184	18Ω 5% 0,5W
0,25W	3311	4822 051 10471	470Ω 2% 0,25W
0,25W	3312	4822 051 10101	100Ω 2% 0,25W
0,25W	3313	4822 116 52184	18Ω 5% 0,5W
,25W			
,25W	3314	4822 116 52175	100Ω 5% 0,5W
	3317	4822 051 10682	6k8 2% 0,25W
0,5W	3320	4822 051 10471	470Ω 2% 0,25W
0,25W	3321	4822 051 10471	470Ω 2% 0,25W
0,25W	3322	4822 051 10471	470Ω 2% 0,25W
0,25W			
0,25W	3331	4822 116 52267	30k 5% 0,5W
	3332	4822 116 52233	10k 5% 0,5W
0,25W	3351	4822 052 11279	27Ω 5% 0,5W
0,25W	3356	4822 051 10681	680Ω 2% 0,25W
0,25W	3357	4822 050 27871	787Ω 1% 0,6W
% 0,25W			
,25W	3358	4822 116 52183	16Ω 5% 0,5W
	3360	4822 051 10122	1k2 2% 0,25W
0,25W	3362	4822 051 10151	150Ω 2% 0,25W
0,25W	3364	4822 051 10471	470Ω 2% 0,25W

3365	4822 051 10221	220Ω 2% 0,25W	
3366	4822 051 10221	220Ω 2% 0,25W	
3368	4822 116 52226	560Ω 5% 0,5W	
3369	4822 116 52226	560Ω 5% 0,5W	
3370	4822 051 10332	3k3 2% 0,25W	
3371	4822 100 11348	1k 30% lin	
3372	4822 051 10561	560Ω 2% 0,25W	
3374	4822 116 52301	75k 5% 0,5W	
3375▲	4822 051 10242	2k4 2% 0,25W	
3376	4822 116 52175	100Ω 5% 0,5W	
3378	4822 051 10101	100Ω 2% 0,25W	
3380	4822 051 10152	1k5 2% 0,25W	
3381	4822 051 10152	1k5 2% 0,25W	
3382	4822 051 10103	10k 2% 0,25W	
3383	4822 051 10103	10k 2% 0,25W	
3385	4822 051 10223	22k 2% 0,25W	
3402	4822 051 10562	5k6 2% 0,25W	
3403	4822 051 10229	22Ω 2% 0,25W	
3404	4822 051 10182	1k8 2% 0,25W	
3405	4822 051 10333	33k 2% 0,25W	
3406	4822 100 11483	10k 30% lin	
3407	4822 051 10561	560Ω 2% 0,25W	
3408	4822 051 10563	56k 2% 0,25W	
3409	4822 116 52292	560k 5% 0,5W	
3409	4822 116 52288	510k 5% 0,5W	
3410	4822 100 11213	22k 30% lin	
3411	4822 051 10104	100k 2% 0,25W	
3411	4822 051 10913	91k 2% 0,25W	
3411	4822 051 10124	120k 2% 0,25W	
3413	4822 051 10101	100Ω 2% 0,25W	
3414	4822 051 10154	150k 2% 0,25W	
3415	4822 100 11392	47k 30% lin	
3416	4822 116 81223	1M2 5% 0,5W	
3417	4822 116 52256	2k2 5% 0,5W	
3418	4822 051 10201	200Ω 2% 0,25W	
3419!	4822 052 10229	22Ω 5% 0,33W	
3420	4822 050 23905	3M9 1% 0,6W	
3421	4822 116 52263	2k7 5% 0,5W	
3422	4822 116 81223	1M2 5% 0,5W	
3422	4822 116 81783	1M5 5% 0,5W	
3423	4822 116 52305	820k 5% 0,5W	
3423	4822 116 52235	1M 5% 0,5W	
3424	4822 051 10221	220Ω 2% 0,25W	
3425	4822 051 10124	120k 2% 0,25W	
3426	4822 051 10331	330Ω 2% 0,25W	
3427	4822 051 10474	470k 2% 0,25W	
3428	4822 116 52271	33k 5% 0,5W	
3429	4822 050 11002	1k 1% 0,4W	
3430	4822 051 10103	10k 2% 0,25W	
3431	4822 051 10333	33k 2% 0,25W	
3437	4822 116 52224	470Ω 5% 0,5W	
3438	4822 116 52175	100Ω 5% 0,5W	
3439	4822 116 52247	16k 5% 0,5W	
3440	4822 051 20222	2k2 5% 0,1W	
3441	4822 051 10622	6k2 2% 0,25W	
3442	4822 051 10332	3k3 2% 0,25W	
3443	4822 051 10112	1k1 2% 0,25W	
3444	4822 051 10103	10k 2% 0,25W	
3446	4822 051 10273	27k 2% 0,25W	
3450	4822 051 10432	4k3 2% 0,25W	
3451	4822 051 10432	4k3 2% 0,25W	
3452▲	4822 052 10159	15Ω 5% 0,33W	
3455	4822 051 10471	470Ω 2% 0,25W	
3456	4822 051 10124	120k 2% 0,25W	
3456	4822 051 10134	130k 2% 0,25W	
3457	4822 051 10822	8k2 2% 0,25W	
3457	4822 051 10912	9k1 2% 0,25W	
3458▲	4822 116 80676	1Ω5 5% 0,5W	
3459▲	4822 116 80676	1Ω5 5% 0,5W	
3460	4822 053 10271	270Ω 5% 1W	
3461	4822 116 80176	1Ω 5% 0,5W	
3462	4822 116 80176	1Ω 5% 0,5W	
3463	4822 116 80176	1Ω 5% 0,5W	
3465	4822 051 10681	680Ω 2% 0,25W	

3466	4822 116 52243	1k5 5% 0,5W	
3466	4822 116 52263	2k7 5% 0,5W	
3466	4822 116 52279	4k3 5% 0,5W	
3467	4822 100 20166	10k 30% lin	
3468	4822 053 12221	220Ω 5% 3W	
3469	4822 050 11002	1k 1% 0,4W	
3469	4822 116 52263	2k7 5% 0,5W	
3469	4822 116 52279	4k3 5% 0,5W	
3471	4822 051 20222	2k2 5% 0,1W	
3471	4822 051 10182	1k8 2% 0,25W	
3473	4822 116 52253	2k 5% 0,5W	
3479	4822 051 10683	68k 2% 0,25W	
3480	4822 116 52234	100k 5% 0,5W	
3481	4822 051 10102	1k 2% 0,25W	
3482	4822 051 10229	22Ω 2% 0,25W	
3483	4822 051 10563	56k 2% 0,25W	
3484	4822 051 10223	22k 2% 0,25W	
3485	4822 051 10102	1k 2% 0,25W	
3500	4822 116 52224	470Ω 5% 0,5W	
3501	4822 051 10392	3k9 2% 0,25W	
3502	4822 116 52299	7k5 5% 0,5W	
3503	4822 116 52299	7k5 5% 0,5W	
3504	4822 053 11108	1Ω 5% 2W	
3505	4822 116 52191	33Ω 5% 0,5W	
3505	4822 116 52195	47Ω 5% 0,5W	
3506	4822 053 11108	1Ω 5% 2W	
3507	4822 116 52191	33Ω 5% 0,5W	
3507	4822 116 52195	47Ω 5% 0,5W	
3508	4822 116 82773	1k8 10% 5W	
3508	4822 116 83003	1k5 10% 5W	
3509	4822 053 21154	150k 5% 0,5W	
3510	4822 113 80592	150Ω 10% 5W	
3512	4822 051 10331	330Ω 2% 0,25W	
3513	4822 100 11319	4k7 30% lin	
3514	4822 116 52189	30Ω 5% 0,5W	
3515▲	4822 052 10108	1Ω 5% 0,33W	
3516▲	4822 052 10108	1Ω 5% 0,33W	
3517▲	4822 052 11108	1Ω 5% 0,5W	
3518	4822 116 52267	30k 5% 0,5W	
3519	4822 116 52267	30k 5% 0,5W	
3520▲	4822 052 11471	470Ω 5% 0,5W	
3521▲	4822 052 11471	470Ω 5% 0,5W	
3522▲	4822 052 11102	1k 5% 0,5W	
3524	4822 116 81753	4Ω7 5% 0,5W	
3525	4822 116 80176	1Ω 5% 0,5W	
3526	4822 053 10688	6Ω8 5% 1W	
3527	4822 051 10102	1k 2% 0,25W	
3528	4822 116 52207	1k2 5% 0,5W	
3529	4822 051 10104	100k 2% 0,25W	
3530	4822 051 10474	470k 2% 0,25W	
3532▲	4822 050 23301	330Ω 1% 0,6W	
3533▲	4822 050 23301	330Ω 1% 0,6W	
3534▲	4822 052 10278	2Ω7 5% 0,33W	
3535▲	4822 052 10278	2Ω7 5% 0,33W	
3536	4822 116 52221	360Ω 5% 0,5W	
3537	4822 116 52189	30Ω 5% 0,5W	
3538	4822 050 21203	12k 1% 0,6W	
3540	4822 116 52267	30k 5% 0,5W	
3541	4822 116 52285	470k 5% 0,5W	
3542	4822 051 10104	100k 2% 0,25W	
3543	4822 051 10152	1k5 2% 0,25W	
3544	4822 051 10393	39k 2% 0,25W	
3545	4822 116 52208	130Ω 5% 0,5W	
3547	4822 051 10518	5Ω1 5% 0,25W	
3548	4822 051 10392	3k9 2% 0,25W	
3549	4822 051 10124	120k 2% 0,25W	
3550	4822 051 10102	1k 2% 0,25W	
3553▲	4822 053 11479	47Ω 5% 2W	
3554▲	4822 051 10008	0Ω 5% 0,25W	
3555	4822 051 10681	680Ω 2% 0,25W	
3556▲	4822 051 10008	0Ω 5% 0,25W	
3557	4822 051 10182	1k8 2% 0,25W	
3558	4822 100 11348	1k 30% lin	
3559	4822 051 10182	1k8 2% 0,25W	

3560▲	4822 052 10108	1Ω 5% 0,33W	
3561	4822 051 10152	1k5 2% 0,25W	
3562	4822 051 51102	1k1 1% 0,125W	
3563	4822 051 10122	1k2 2% 0,25W	
3600	4822 051 10912	9k1 2% 0,25W	
3600	4822 051 10133	13k 2% 0,25W	
3601	4822 051 10104	100k 2% 0,25W	
3601	4822 051 10154	150k 2% 0,25W	
3602	4822 100 20166	10k 30% lin	
3603	4822 051 10153	15k 2% 0,25W	
3603	4822 051 10123	12k 2% 0,25W	
3603	4822 051 20183	18k 5% 0,1W	
3603	4822 051 10203	20k 2% 0,25W	
3604	4822 051 10134	130k 2% 0,25W	
3604	4822 051 10164	160k 2% 0,25W	
3604	4822 051 10184	180k 2% 0,25W	
3605	4822 051 10133	13k 2% 0,25W	
3605	4822 051 10243	24k 2% 0,25W	
3606	4822 051 10333	33k 2% 0,25W	
3606	4822 051 10223	22k 2% 0,25W	
3607	4822 100 11213	22k 30% lin	
3608	4822 051 10103	10k 2% 0,25W	
3609	4822 051 10473	47k 2% 0,25W	
3610	4822 051 10472	4k7 2% 0,25W	
3611	4822 051 20222	2k2 5% 0,1W	
3614	4822 116 52243	1k5 5% 0,5W	
3615	4822 116 52224	470Ω 5% 0,5W	
3616	4822 051 10332	3k3 2% 0,25W	
3617	4822 051 20222	2k2 5% 0,1W	
3618	4822 051 10683	68k 2% 0,25W	
3619	4822 051 20222	2k2 5% 0,1W	
3620	4822 051 10622	6k2 2% 0,25W	
3621	4822 051 10164	160k 2% 0,25W	
3622	4822 116 80176	1Ω 5% 0,5W	
3623	4822 116 80176	1Ω 5% 0,5W	
3626	4822 116 52267	30k 5% 0,5W	
3627	4822 051 10103	10k 2% 0,25W	
3628	4822 116 52284	47k 5% 0,5W	
3629	4822 051 10224	220k 2% 0,25W	
3630	4822 051 10104	100k 2% 0,25W	
3631	4822 051 10182	1k8 2% 0,25W	
3632	4822 051 10101	100Ω 2% 0,25W	
3632	4822 051 10153	15k 2% 0,25W	
3633	4822 051 10244	240k 2% 0,25W	
3633	4822 051 10104	100k 2% 0,25W	
3633	4822 051 10204	200k 2% 0,25W	
3634	4822 051 10473	47k 2% 0,25W	
3650	4822 051 20183	18k 5% 0,1W	
3651	4822 051 10102	1k 2% 0,25W	
3652	4822 051 10822	8k2 2% 0,25W	
3653	4822 051 10104	100k 2% 0,25W	
3654	4822 051 20222	2k2 5% 0,1W	
3655	4822 051 20222	2k2 5% 0,1W	
3656	4822 051 10103	10k 2% 0,25W	

Jumper

4000	4822 051 10008	0Ω 5% 0,25W	
4001	4822 051 10008	0Ω 5% 0,25W	
4002	4822 051 10008	0Ω 5% 0,25W	
4003	4822 051 10008	0Ω 5% 0,25W	
4004	4822 051 10008	0Ω 5% 0,25W	
4006	4822 051 10008	0Ω 5% 0,25W	
4007	4822 051 10008	0Ω 5% 0,25W	
4010	4822 051 10008	0Ω 5% 0,25W	
4011	4822 051 10008	0Ω 5% 0,25W	
4012	4822 051 10008	0Ω 5% 0,25W	
4019	4822 051 10008	0Ω 5% 0,25W	
4039	4822 051 10008	0Ω 5% 0,25W	
4274	4822 051 10008	0Ω 5% 0,25W	
4400	4822 051 10008	0Ω 5% 0,25W	
4410	4822 051 10008	0Ω 5% 0,25W	
4412	4822 051 10008	0Ω 5% 0,25W	
4413	4822 051 10008	0Ω 5% 0,25W	
4415	4822 051 10008	0Ω 5% 0,25W	

Spare parts list / Stückliste / Liste des pièces

› 0,33W	4416	4822 051 10008	0Ω 5% 0,25W
% 0,25W	4417	4822 051 10008	0Ω 5% 0,25W
% 0,125W	4420	4822 051 10008	0Ω 5% 0,25W
% 0,25W	4421	4822 051 10008	0Ω 5% 0,25W
% 0,25W	4465	4822 051 10008	0Ω 5% 0,25W
% 0,25W	4467	4822 051 10008	0Ω 5% 0,25W
2% 0,25W	4469	4822 051 10008	0Ω 5% 0,25W
2% 0,25W	4507	4822 051 10008	0Ω 5% 0,25W
0% lin	4517	4822 051 10008	0Ω 5% 0,25W
% 0,25W	4518	4822 051 10008	0Ω 5% 0,25W
% 0,25W	4519	4822 051 10008	0Ω 5% 0,25W
% 0,1W	4521	4822 051 10008	0Ω 5% 0,25W
% 0,25W	4522	4822 051 10008	0Ω 5% 0,25W
2% 0,25W	4525	4822 051 10008	0Ω 5% 0,25W
2% 0,25W	4527	4822 051 10008	0Ω 5% 0,25W
2% 0,25W	4528	4822 051 10008	0Ω 5% 0,25W
% 0,25W	4529	4822 051 10008	0Ω 5% 0,25W
% 0,25W	4530	4822 051 10008	0Ω 5% 0,25W
% 0,25W	4531	4822 051 10008	0Ω 5% 0,25W
% 0,25W	4533	4822 051 10008	0Ω 5% 0,25W
0% lin	4534	4822 051 10008	0Ω 5% 0,25W
% 0,25W			
% 0,25W			
% 0,25W			
% 0,1W			
% 0,5W	5204	4822 157 10291	mainsfilter CU28D5
5% 0,5W	5230▲	4822 148 81192	SOPS transf.
% 0,25W	5231	4822 526 10494	ferrite bead
% 0,1W	5233	4822 526 10494	ferrite bead
% 0,25W	5235	4822 526 10494	ferrite bead
	5237	4822 526 10494	ferrite bead
	5241	4822 157 63696	18µH 10%
% 0,1W	5255▲	4822 148 81225	µSOPS transf.
% 0,25W	5260	4822 526 10494	ferrite bead
2% 0,25W	5262	4822 526 10494	ferrite bead
% 0,5W			
% 0,5W	5308	4822 157 70001	180µH 10%
	5310	4822 157 51195	1µH 20%
% 0,5W	5381▲	4822 157 52265	100µH 10%
% 0,25W	5503	4822 157 63252	line driver
% 0,5W	5510	4822 157 62412	27µH 10%
2% 0,25W			
2% 0,25W	5511	4822 157 52407	39µH 7,5%
	5514	4822 157 70006	DC-shift
% 0,25W	5521	4822 157 63255	bridge coil
2% 0,25W	5522	4822 156 50107	linearity corr.
% 0,25W	5524	4822 526 10494	ferrite bead
2% 0,25W			
2% 0,25W	5526	4822 157 63253	choke
	5527	4822 157 70472	0,56µH 20%
2% 0,25W	5534	5322 157 52539	15µH 7,5%
% 0,25W	5543	4822 157 62412	27µH 10%
% 0,1W	5555▲	4822 140 10443	L.O.T.
% 0,25W			
% 0,25W			
2% 0,25W	6000	4822 130 80446	LL4148
% 0,1W	6001	4822 130 80446	LL4148
% 0,1W	6008	4822 209 73095	P4KE30C-7000
% 0,25W	6010	4822 130 80446	LL4148
	6011	4822 130 80446	LL4148
	6012	4822 130 80446	LL4148
% 0,25W	6016	4822 130 80446	LL4148
% 0,25W	6017	4822 130 80446	LL4148
% 0,25W	6021	4822 130 80446	LL4148
% 0,25W	6201	4822 130 80446	LL4148
% 0,25W			
	6210	4822 130 33887	GP15J-16
% 0,25W	6211	4822 130 33887	GP15J-16
% 0,25W	6212	4822 130 33887	GP15J-16
% 0,25W	6213	4822 130 33887	GP15J-16
% 0,25W	6216	4822 130 42606	BYD33J
% 0,25W			D23-C5V6
	6331▲	4822 130 30621	1N4148
% 0,25W	6349	4822 130 80446	LL4148
% 0,25W	6350	4822 130 80446	LL4148
% 0,25W	6351▲	4822 130 30621	1N4148
% 0,25W	6352	4822 130 80446	LL4148
% 0,25W	6353	4822 130 80446	LL4148
% 0,25W	6355	4822 130 80446	LL4148
% 0,25W	6356	4822 130 80886	LLZ-F22

Jumper

6357	4822 130 80446	LL4148
6370	4822 130 81512	LLZ-C6V2
6371	4822 130 80446	LL4148
6372	4822 130 80446	LL4148
6373	4822 130 82583	LLZ-C9V1
6375	4822 130 80446	LL4148
6376	4822 130 81143	LLZ-C20
6403	4822 130 80446	LL4148
6404	4822 130 80446	LL4148
6405	4822 130 80446	LL4148
6417	4822 130 81223	LLZ-C2V4
6440	4822 130 80446	LL4148
6441	4822 130 80446	LL4148
6451	5322 130 34834	BZX79-C3V6
6452	4822 130 42488	BYD33D
6465	4822 130 80446	LL4148
6467	4822 130 80446	LL4148
6480	4822 130 31554	BZX79-C4V3
6504	4822 130 42488	BYD33D
6506	4822 130 42488	BYD33D
6507	4822 130 83086	LL4150
6515	4822 130 42488	BYD33D
6516	4822 130 42488	BYD33D
6517	4822 130 42488	BYD33D
6519▲	4822 130 32896	BYD33M
6520▲	4822 130 32896	BYD33M
6526▲	4822 130 33531	BY229F-600
6527	4822 130 83185	BY359F-1500
6529	4822 130 34329	BZX79-C43
6535	4822 130 82512	BYV29F-400
6536	4822 130 80982	BYW29F-100
6538	4822 130 80954	LLZ-C5V6
6542	4822 130 42488	BYD33D
6546	4822 130 80446	LL4148
6547▲	4822 130 30621	1N4148
6551	4822 130 80954	LLZ-C5V6
6629	4822 130 80446	LL4148
6650	4822 130 82583	LLZ-C9V1
6651	4822 130 80446	LL4148

7000	4822 209 73311	TDA1521Q/N4
7001	4822 209 73311	TDA1521Q/N4
7002▲	4822 209 83163	LM833N
7003	4822 130 61207	BC848
7005	5322 130 42136	BC848C
7006	5322 130 42136	BC848C
7007	4822 130 61207	BC848
7008	4822 130 61207	BC848
7009▲	4822 209 83163	LM833N
7010	5322 130 42012	BC858
7011	4822 209 63913	TDA1521AQ/N4
7012	4822 130 61207	BC848
7013	4822 130 61207	BC848
7201	5322 130 42756	BC857C
7216	4822 130 63239	ON4827
7241	4822 130 61003	BD944F
7242	5322 130 44349	BC635
7250	4822 130 62509	BUX85F
7251	4822 130 61207	BC848
7268	4822 130 62742	BD943F
7270	4822 130 41746	BD825
7273	4822 130 42513	BC858C
7274	4822 130 42513	BC858C
7305	5322 130 42136	BC848C
7311	4822 130 42513	BC858C
7312	4822 130 62955	ON4703-BD437
7318	4822 130 42615	BC817-40
7320▲	4822 130 82034	CNX83A
7360	5322 130 42756	BC857C
7369	5322 130 42755	BC847C
7370	5322 130 42755	BC847C
7371	4822 130 42513	BC858C
7380	4822 130 42513	BC858C

7381	5322 130 42136	BC848C
7384	5322 130 42755	BC847C
7400	4822 209 30402	TDA2579B/N2/S1
7402	5322 130 42136	BC848C
7403	4822 130 42513	BC858C
7407	4822 130 61207	BC848
7417	4822 130 42513	BC858C
7444	5322 130 42136	BC848C
7445	5322 130 42136	BC848C
7450	4822 209 73308	TDA3654Q/N3
7451	5322 130 42012	BC858
7469	4822 130 44283	BC636
7480	4822 130 42513	BC858C
7481	5322 130 42136	BC848C
7501	4822 130 63316	BSN304
7504	4822 209 63912	ON4673
7506	4822 209 63912	ON4673
7512	4822 130 41109	BD135-16
7513	4822 130 41194	BD136-16
7530	4822 130 60136	BC856
7540	5322 130 42755	BC847C
7541	5322 130 42755	BC847C
7542	5322 130 42756	BC857C
7543	4822 130 60136	BC856
7550	4822 130 63085	BD944F-ON4743
7551	4822 209 70672	LM358N
7552	5322 130 44349	BC635
7601	4822 130 61207	BC848
7602	5322 130 42012	BC858
7603	5322 130 42012	BC858
7608	4822 130 44503	BC547C
7610	4822 130 62845	BDT60F
7616	4822 130 61207	BC848
7618	4822 130 61207	BC848
7650	5322 130 42136	BC848C
7651	5322 130 42136	BC848C
7652	5322 130 42136	BC848C

Small signal panel
C D F H

Various

4822 265 40252	7P male
4822 265 40253	8P male
4822 267 50637	10P grey
4822 265 41086	9P male
4822 265 41114	9P
4822 265 41082	10P flexcon.
4822 290 40295	7P male
4822 265 30378	4P male
4822 267 41095	5P male
4822 265 41326	10P male hor.
4822 264 40207	3P male
4822 267 51242	10P male vert.
4822 265 31009	3P pinstrip
4822 265 20512	2P green
4822 290 61116	9P pinstrip
4822 265 40442	10P male
4822 265 41335	11P
4822 267 40666	3P male vert.
4822 265 20509	2P grey
4822 265 30828	5P male vert.
4822 265 30899	5P male black
4822 267 40696	3P male white
4822 265 31112	5P male hor.
4822 265 31101	3P male hor.
4822 267 20427	socket SCART +4xcinch
4822 267 20411	socket SCART +2xcinch
4822 267 41005	socket 2xcinch +2xSVHS
4822 267 20409	socket 2xcinch +1xSVHS

Various

	4822 267 20408	socket headph. +cinch
	4822 267 51058	socket SCART
	4822 267 41004	socket headph. +cinch+SVHS
	4822 267 51112	socket D2B
	4822 218 21084	keyboard
	4822 255 40901	IC socket 40P
1100	4822 212 23281	IR receiver
1107	4822 242 71711	filter 6MHz
1160	4822 210 10548	FQ916ME/BL
1160	4822 210 10558	FQ916MF/LIF
1160	4822 210 10556	FQ944/LIF
1160	4822 210 10549	FQ916DME/B
1160	4822 210 10557	FQ916DMF/IF
1160	4822 210 10555	FQ944D/IF
1162	4822 212 30145	SAT IF 12MHz
1162	4822 212 30146	SAT IF 8MHz
1248	4822 242 80364	filter 4,43MHz
1379	4822 242 70736	crystal 7,159 090 MHz
1380	4822 242 70304	crystal 8,867 238 MHz
1602	4822 242 80276	crystal 10MHz

2100	4822 124 40684	150µF 20% 6,3V
2103	4822 122 31765	100pF 2% 63V
2107	4822 126 11544	22nF 63V
2111	4822 126 11544	22nF 63V
2114	4822 124 22606	68µF 20% 16V
2118	4822 122 31797	22nF 10% 63V
2119	4822 122 31797	22nF 10% 63V
2120	4822 126 11544	22nF 63V
2121	5322 122 31647	1nF 10% 63V
2122▲	4822 122 32442	10nF 50V
2123	4822 126 11804	330nF
2124	4822 126 11544	22nF 63V
2130	4822 122 31797	22nF 10% 63V
2131	4822 124 22606	68µF 20% 16V
2132	4822 122 31797	22nF 10% 63V
2137▲	4822 122 32442	10nF 50V
2138	4822 124 40193	68µF 20% 16V
2141	4822 121 42408	220nF 5% 63V
2160	4822 124 40849	330µF 20% 16V
2162	4822 124 41829	1000µF 20% 6,3V
2163	4822 122 33496	100nF 10% 63V
2164	4822 122 33496	100nF 10% 63V
2165	4822 122 31947	100nf 20% 63V
2168	4822 122 32927	220nF +80-20% 50V
2169▲	4822 122 32442	10nF 50V
2170	4822 124 40195	150µF 20% 16V
2171	4822 122 32862	10nF 80% 50V
2172	4822 124 40433	47µF 20% 25V
2180	4822 122 31947	100nF 20% 63V
2181	4822 126 11544	22nF 63V
2188	4822 126 11544	22nF 63V
2189	4822 126 11544	22nF 63V
2190	4822 121 41856	22nF 5% 250V
2191	4822 126 11544	22nF 63V
2193	4822 122 32153	1,8nF 10% 63V
2194	4822 122 32153	1,8nF 10% 63V
2198	4822 121 41856	22nF 5% 250V
2216	4822 122 32927	220nF +80-20% 50V
2219	4822 122 32927	220nF +80-20% 50V
2221	4822 126 12075	680pF 2% 63V
2234	4822 122 32927	220nF +80-20% 50V
2240	4822 122 32927	220nF +80-20% 50V
2241	4822 121 42408	220nF 5% 63V
2242▲	4822 124 40196	220µF 20% 16V
2243	4822 121 42408	220nF 5% 63V

Spare parts list / Stückliste / Liste des pièces

2245	4822 122 32927	220nF +80-20% 50V	
2249	4822 122 32862	10nF 80% 50V	
2250	4822 051 10102	1K 2% 0,25W	
2250	4822 122 31947	100nF 20% 63V	
2251	4822 122 31947	100nF 20% 63V	
2252	4822 121 42408	220nF 5% 63V	
2253	4822 126 11492	220nF 10% 50V	
2254	4822 122 32927	220nF +80-20% 50V	
2255	4822 124 41643	100µF 20% 16V	
2257	4822 122 31947	100nF 20% 63V	
2258	4822 122 31765	100pF 2% 63V	
2260	4822 122 31947	100nF 20% 63V	
2261	4822 122 31947	100nF 20% 63V	
2268	4822 122 31947	100nF 20% 63V	
2269	4822 122 32482	22pF 2% 63V	
2270	4822 126 11544	22nF 63V	
2274	4822 122 32862	10nF 80% 50V	
2301	5322 122 31647	1nF 10% 63V	
2305	4822 126 10324	33pF 2% 63V	
2306	4822 122 31772	47pF 2% 63V	
2312	4822 126 11544	22nF 63V	
2318	4822 121 42408	220nF 5% 63V	
2324	4822 126 11544	22nF 63V	
2338	4822 122 31772	47pF 2% 63V	
2342	4822 122 31972	39pF 2% 63V	
2343	4822 122 31727	470pF 2% 63V	
2344	4822 122 31775	680pF 2% 63V	
2345	4822 122 31807	1200pF 2% 63V	
2347	5322 122 31647	1nF 10% 63V	
2353	4822 122 32862	10nF 80% 50V	
2360	4822 124 40272	33µF 20% 16V	
2361	4822 124 40849	330µF 20% 16V	
2365	4822 122 31352	180pF 2% 100V	
2366	4822 126 11544	22nF 63V	
2367	4822 122 32862	10nF 80% 50V	
2368	4822 122 32862	10nF 80% 50V	
2369	4822 122 31825	27pF 2% 63V	
2371	4822 122 31825	27pF 2% 63V	
2372	4822 122 31965	220pF 2% 63V	
2373	4822 122 31965	220pF 2% 63V	
2374	4822 126 11544	22nF 63V	
2375	4822 126 11544	22nF 63V	
2376	4822 126 11544	22nF 63V	
2377	5322 121 42661	330nF 5% 63V	
2378	4822 122 31947	100nF 20% 63V	
2379	4822 125 50207	33pF trim	
2380	4822 125 50207	33pF trim	
2381	5322 121 42661	330nF 5% 63V	
2382	5322 122 31647	1nF 10% 63V	
2383▲	4822 122 32442	10nF 50V	
2384	5322 122 31647	1nF 10% 63V	
2385▲	4822 122 32442	10nF 50V	
2387	4822 124 40435	10µF 20% 50V	
2388	5322 122 33446	3,3nF 10% 63V	
2390	4822 126 11544	22nF 63V	
2391	4822 126 11544	22nF 63V	
2392	4822 126 11544	22nF 63V	
2395	4822 126 11544	22nF 63V	
2396	4822 122 32927	220nF +80-20% 50V	
2397	4822 126 11544	22nF 63V	
2398	4822 124 40435	10µF 20% 50V	
2399	4822 124 40433	47µF 20% 25V	
2400	4822 126 11544	22nF 63V	
2403	4822 126 11544	22nF 63V	
2404	5322 122 33446	3,3nF 10% 63V	
2435	5322 122 33446	3,3nF 10% 63V	
2436	4822 122 31961	68pF 2% 63V	
2438	4822 126 11544	22nF 63V	
2440	4822 126 11544	22nF 63V	
2442	4822 126 11544	22nF 63V	
2445	4822 126 11804	330nF	

2446	4822 126 11804	330nF	
2447	4822 126 11804	330nF	
2451	5322 121 42661	330nF 5% 63V	
2452	4822 124 22466	1µF 20% 50V	
2452	4822 124 40749	3,3µF 20% 63V	
2453	4822 122 31774	56pF 2% 63V	
2454	4822 126 10324	33pF 2% 63V	
2455	4822 126 10324	33pF 2% 63V	
2456	4822 126 10324	33pF 2% 63V	
2476	4822 124 41577	4,7µF 20% 50V	
2478	4822 122 31784	4,7nF 10% 50V	
2479	4822 122 32183	56nF 10% 50V	
2480	4822 124 40272	33µF 20% 16V	
2600	4822 122 31947	100nF 20% 63V	
2602	4822 122 31947	100nF 20% 63V	
2604	4822 122 31947	100nF 20% 63V	
2606	4822 122 31947	100nF 20% 63V	
2608	4822 122 32927	220nF +80-20% 50V	
2620	4822 122 32927	220nF +80-20% 50V	
2622	4822 122 32927	220nF +80-20% 50V	
2624	5322 122 31842	330pF 2% 63V	
2626	4822 122 32927	220nF +80-20% 50V	
2627	5322 124 41431	22µF 20% 35V	
2628	5322 122 31842	330pF 2% 63V	
2630	4822 122 32927	220nF +80-20% 50V	
2632	5322 122 31842	330pF 2% 63V	
2634	4822 121 42408	220nF 5% 63V	
2636	5322 122 31842	330pF 2% 63V	
2638	4822 121 42408	220nF 5% 63V	
2640	5322 122 31842	330pF 2% 63V	
2642	4822 122 32927	220nF +80-20% 50V	
2644	5322 122 31842	330pF 2% 63V	
2646	4822 122 32927	220nF +80-20% 50V	
2658	4822 122 31961	68pF 2% 63V	
2659	4822 122 31961	68pF 2% 63V	
2660	5322 122 31647	1nF 10% 63V	
2662	5322 122 31647	1nF 10% 63V	
2664	4822 122 32153	1,8nF 10% 63V	
2666	4822 122 32153	1,8nF 10% 63V	
2680	4822 122 31947	100nF 20% 63V	
2681	4822 122 32542	47nF 10% 63V	
2682	4822 124 40195	150µF 20% 16V	
2684	4822 121 51252	470nF 5% 63V	
2686	4822 121 51252	470nF 5% 63V	
2688	4822 122 31782	15nF 10% 50V	
2690	4822 122 31782	15nF 10% 50V	
2692	4822 122 31981	33nF +-0,5pF 50V	
2694	4822 122 31916	5,6nF 10% 63V	
2696	4822 122 31981	33nF +-0,5pF 50V	
2697	4822 122 32765	820pF 2% 63V	
2698	4822 122 31916	5,6nF 10% 63V	
2699	4822 122 32765	820pF 2% 63V	
2700	4822 124 40242	1µF 20% 63V	
2702	4822 124 40242	1µF 20% 63V	
2704	4822 122 31644	2,2nF 10% 63V	
2706	5322 124 41431	22µF 20% 35V	
2707	4822 122 31784	4,7nF 10% 50V	
2714	4822 126 11544	22nF 63V	
2716	4822 122 32597	6,8nF 10% 63V	
2720	5322 124 41431	22µF 20% 35V	
2721	4822 122 31784	4,7nF 10% 50V	
2726	4822 122 31644	2,2nF 10% 63V	
2727	4822 124 42362	33µF 20% 16V	
2728	4822 124 42362	33µF 20% 16V	
2734	4822 126 11544	22nF 63V	
2736	4822 122 32597	6,8nF 10% 63V	

3100	4822 051 10102	1k 2% 0,25W	
3101	4822 116 52175	100Ω 5% 0,5W	
3102	4822 051 10101	100Ω 2% 0,25W	
3103	4822 051 10101	100Ω 2% 0,25W	
3104	4822 116 52175	100Ω 5% 0,5W	
3107	4822 051 10103	10k 2% 0,25W	
3108	4822 051 10104	100k 2% 0,25W	
3109	4822 051 10271	270Ω 2% 0,25W	
3110	4822 051 10101	100Ω 2% 0,25W	
3111	4822 051 10101	100Ω 2% 0,25W	
3112	4822 050 11002	1k 1% 0,4W	
3113	4822 116 52175	100Ω 5% 0,5W	
3114	4822 116 52175	100Ω 5% 0,5W	
3115	4822 116 52175	100Ω 5% 0,5W	
3116	4822 116 52175	100Ω 5% 0,5W	
3117	4822 051 20222	2k2 5% 0,1W	
3119	4822 051 20222	2k2 5% 0,1W	
3120	4822 051 20222	2k2 5% 0,1W	
3121	4822 051 10123	12k 2% 0,25W	
3122	4822 051 10103	10k 2% 0,25W	
3122	4822 051 10123	12k 2% 0,25W	
3123	4822 051 10103	10k 2% 0,25W	
3123	4822 051 10123	12k 2% 0,25W	
3124	4822 051 10101	100Ω 2% 0,25W	
3125	4822 051 10101	100Ω 2% 0,25W	
3126	4822 051 10101	100Ω 2% 0,25W	
3128	4822 051 10471	470Ω 2% 0,25W	
3130	4822 051 10101	100Ω 2% 0,25W	
3131	4822 116 52175	100Ω 5% 0,5W	
3132	4822 116 52175	100Ω 5% 0,5W	
3133	4822 051 10151	150Ω 2% 0,25W	
3134	4822 116 52175	100Ω 5% 0,5W	
3135	4822 051 10101	100Ω 2% 0,25W	
3136	4822 051 10101	100Ω 2% 0,25W	
3137	4822 116 52175	100Ω 5% 0,5W	
3138	4822 116 52175	100Ω 5% 0,5W	
3139	4822 116 52175	100Ω 5% 0,5W	
3140	4822 050 11002	1k 1% 0,4W	
3141	4822 050 11002	1k 1% 0,4W	
3142	4822 050 11002	1k 1% 0,4W	
3143	4822 050 11002	1k 1% 0,4W	
3144	4822 050 11002	1k 1% 0,4W	
3145	4822 050 11002	1k 1% 0,4W	
3146	4822 050 11002	1k 1% 0,4W	
3148	4822 051 10473	47k 2% 0,25W	
3149	4822 051 10473	47k 2% 0,25W	
3150	4822 051 10473	47k 2% 0,25W	
3151	4822 051 10562	5k6 2% 0,25W	
3153	4822 051 10103	10k 2% 0,25W	
3154	4822 051 10152	1k5 2% 0,25W	
3155	4822 051 10104	100k 2% 0,25W	
3156	4822 051 10562	5k6 2% 0,25W	
3157	4822 050 11002	1k 1% 0,4W	
3158	4822 050 11002	1k 1% 0,4W	
3159	4822 051 10103	10k 2% 0,25W	
3160▲	4822 052 10109	10Ω 5% 0,33W	
3161	4822 051 10103	10k 2% 0,25W	
3162▲	4822 052 10159	15Ω 5% 0,33W	
3163	4822 051 10223	22k 2% 0,25W	
3164	4822 051 10108	1Ω 5% 0,25W	
3165	4822 051 10108	1Ω 5% 0,25W	
3167	4822 051 10122	1k2 2% 0,25W	
3168▲	4822 051 10242	2k4 2% 0,25W	
3169	4822 050 11002	1k 1% 0,4W	
3170▲	4822 116 82772	3Ω9 5% 0.3W	
3171	4822 052 11511	510Ω 5% 0,5W	
3172▲	4822 052 10159	15Ω 5% 0,33W	
3175	4822 051 10153	15k 2% 0,25W	
3176	4822 051 10103	10k 2% 0,25W	
3177	4822 051 10103	10k 2% 0,25W	
3178	4822 051 10223	22k 2% 0,25W	
3180	4822 116 52224	470Ω 5% 0,5W	
3181	4822 051 10822	8k2 2% 0,25W	
3182	4822 116 52214	200Ω 5% 0,5W	

3183	4822 116 52233	10k 5% 0,5W	
3184	4822 051 51201	120Ω 1% 0,125W	
3185	4822 051 10471	470Ω 2% 0,25W	
3186	4822 116 52256	2k2 5% 0,5W	
3187	4822 051 10759	75Ω 2% 0,25W	
3189	4822 051 10223	22k 2% 0,25W	
3190	4822 051 10823	82k 2% 0,25W	
3191	4822 051 10823	82k 2% 0,25W	
3192	4822 051 10153	15k 2% 0,25W	
3193	4822 051 10331	330Ω 2% 0,25W	
3194	4822 051 10331	330Ω 2% 0,25W	
3200	4822 051 10472	4k7 2% 0,25W	
3201	4822 051 10472	4k7 2% 0,25W	
3202	4822 051 10472	4k7 2% 0,25W	
3205	4822 051 10759	75Ω 2% 0,25W	
3206	4822 051 10759	75Ω 2% 0,25W	
3207	4822 051 10759	75Ω 2% 0,25W	
3208	4822 051 10101	100Ω 2% 0,25W	
3209	4822 051 10101	100Ω 2% 0,25W	
3210	4822 051 10101	100Ω 2% 0,25W	
3211	4822 116 52224	470Ω 5% 0,5W	
3215	4822 051 10689	68Ω 2% 0,25W	
3216▲	4822 052 10828	8Ω2 5% 0,33W	
3216▲	4822 116 81193	15Ω 5% 0,3W	
3217	4822 116 52224	470Ω 5% 0,5W	
3218	4822 051 10471	470Ω 2% 0,25W	
3219▲	4822 051 10008	0Ω 5% 0,25W	
3220	4822 051 10561	560Ω 2% 0,25W	
3222▲	4822 116 52217	270Ω 5% 0,5W	
3224	4822 051 10759	75Ω 2% 0,25W	
3225	4822 051 10471	470Ω 2% 0,25W	
3232	4822 051 10102	1k 2% 0,25W	
3233	4822 051 10102	1k 2% 0,25W	
3234	4822 051 10759	75Ω 2% 0,25W	
3235	4822 051 10759	75Ω 2% 0,25W	
3237▲	4822 116 52217	270Ω 5% 0,5W	
3238	4822 116 52222	390Ω 5% 0,5W	
3239	4822 051 10271	270Ω 2% 0,25W	
3240	4822 051 10759	75Ω 2% 0,25W	
3241	4822 051 10759	75Ω 2% 0,25W	
3242▲	4822 116 52219	330Ω 5% 0,5W	
3243	4822 051 10152	1k5 2% 0,25W	
3244	4822 051 10102	1k 2% 0,25W	
3245	4822 051 10474	470k 2% 0,25W	
3246	4822 051 10331	330Ω 2% 0,25W	
3247	4822 051 10102	1k 2% 0,25W	
3248	4822 051 10681	680Ω 2% 0,25W	
3249	4822 051 10102	1k 2% 0,25W	
3251	4822 051 10759	75Ω 2% 0,25W	
3252	4822 051 10759	75Ω 2% 0,25W	
3253	4822 051 10331	330Ω 2% 0,25W	
3254▲	4822 052 10828	8Ω2 5% 0,33W	
3254▲	4822 116 81193	15Ω 5% 0,3W	
3255	4822 051 10821	820Ω 2% 0,25W	
3259	4822 051 10103	10k 2% 0,25W	
3260▲	4822 052 10828	8Ω2 5% 0,33W	
3260▲	4822 116 81193	15Ω 5% 0,3W	
3261	4822 051 10471	470Ω 2% 0,25W	
3262	4822 051 10103	10k 2% 0,25W	
3263	4822 051 10689	68Ω 2% 0,25W	
3264	4822 051 10471	470Ω 2% 0,25W	
3265	4822 051 10103	10k 2% 0,25W	
3266	4822 051 10103	10k 2% 0,25W	
3267	4822 051 10103	10k 2% 0,25W	
3268	4822 051 10101	100Ω 2% 0,25W	
3269	4822 051 10561	560Ω 2% 0,25W	
3270	4822 051 10472	4k7 2% 0,25W	
3271	4822 051 10471	470Ω 2% 0,25W	
3272	4822 116 52228	680Ω 5% 0,5W	
3273	4822 051 10471	470Ω 2% 0,25W	
3274	4822 051 10103	10k 2% 0,25W	
3275	4822 051 10689	68Ω 2% 0,25W	
3276	4822 051 10471	470Ω 2% 0,25W	
3277	4822 051 10271	270Ω 2% 0,25W	

3278	4822		
3279	4822		
3280	4822		
3281	4822		
3285	4822		
3285	4822		
3286	4822		
3286	4822		
3287	4822		
3287	4822		
3288	4822		
3288	4822		
3300	4822		
3301	4822		
3303	4822		
3304	4822		
3305	4822		
3306	4822		
3310▲	4822		
3316	4822		
3325	4822		
3326	4822		
3326	4822		
3327	4822		
3336	4822		
3338	4822		
3339	4822		
3342	4822		
3344	4822		
3345	4822		
3350	4822		
3351	4822		
3353	4822		
3360▲	4822		
3361	4822		
3369	4822		
3370	4822		
3371	4822		
3372	4822		
3375	4822		
3377	4822		
3380	4822		
3382	4822		
3383	4822		
3387	4822		
3389	4822		
3391	4822		
3392	4822		
3393	4822		
3394	4822		
3395	4822		
3396	4822		
3397	4822		
3397	4822		
3398	4822		
3399	4822		
3410	4822		
3425	4822		
3426	4822		
3439	4822		
3441	4822		
3443	4822		
3450	4822		
3451	4822		
3451	4822		
3453	4822		
3454	4822		
3455	4822		
3456	4822		
3465	4822		
3466	4822		
3471	4822		
3472	4822		
3473	4822		

0,5W			
% 0,125W			
% 0,25W			
0,5W			
0,25W			
0,25W			
0,25W			
0,25W			
0,25W			
% 0,25W			
% 0,25W			
0,25W			
0,25W			
0,25W			
0,25W			
0,25W			
0,25W			
% 0,25W			
% 0,25W			
% 0,25W			
% 0,5W			
0,25W			
0,33W			
0,3W			
% 0,5W			
% 0,25W			
0,25W			
% 0,25W			
% 0,5W			
0,25W			
% 0,25W			
,25W			
,25W			
0,25W			
0,25W			
% 0,5W	3369	4822 051 10331	330Ω 2% 0,25W
% 0,5W	3370	4822 100 11391	330Ω 30% lin
% 0,25W	3371	4822 051 10431	430Ω 2% 0,25W
0,25W	3372	4822 051 10331	330Ω 2% 0,25W
0,25W	3375	4822 116 80176	1Ω 5% 0,5W
% 0,5W	3377	4822 051 10682	6k8 2% 0,25W
0,25W	3380	4822 050 11002	1k 1% 0,4W
,25W	3382	4822 051 20222	2k2 5% 0,1W
% 0,25W	3383	4822 051 10333	33k 2% 0,25W
% 0,25W	3387	4822 050 11002	1k 1% 0,4W
,25W	3389	4822 051 10182	1k8 2% 0,25W
% 0,25W	3391	4822 051 20222	2k2 5% 0,1W
,25W	3392	4822 051 10101	100Ω 2% 0,25W
0,25W	3393	4822 051 10101	100Ω 2% 0,25W
0,25W	3394	4822 051 10101	100Ω 2% 0,25W
% 0,25W	3395	4822 051 10471	470Ω 2% 0,25W
0,33W	3396	4822 051 20222	2k2 5% 0,1W
0,3W	3397	4822 116 81192	12Ω 5% 0,3W
% 0,25W	3397	4822 052 10259	24Ω 5% 0,33W
0,25W	3398	4822 116 52175	100Ω 5% 0,5W
0,33W	3399	4822 116 52175	100Ω 5% 0,5W
0,3W	3410	4822 116 52224	470Ω 5% 0,5W
% 0,25W	3425	4822 116 52224	470Ω 5% 0,5W
0,25W	3426	4822 116 52224	470Ω 5% 0,5W
0,25W	3439	4822 051 10221	220Ω 2% 0,25W
% 0,25W	3441	4822 051 10221	220Ω 2% 0,25W
0,25W	3443	4822 051 10221	220Ω 2% 0,25W
0,25W	3450	4822 051 20222	2k2 5% 0,1W
0,25W	3451	4822 051 10432	4k3 2% 0,25W
% 0,25W	3451	4822 051 10103	10k 2% 0,25W
% 0,25W	3453	4822 051 10511	510Ω 2% 0,25W
0,25W	3454	4822 051 10101	100Ω 2% 0,25W
% 0,25W	3455	4822 051 10101	100Ω 2% 0,25W
% 0,5W	3456	4822 051 10101	100Ω 2% 0,25W
% 0,25W	3465	4822 051 10102	1k 2% 0,25W
0,25W	3466	4822 051 10479	47Ω 2% 0,25W
0,25W	3471	4822 116 52233	10k 5% 0,5W
% 0,25W	3472	4822 051 10682	6k8 2% 0,25W
% 0,25W	3473	4822 051 10362	3k6 2% 0,25W

3278	4822 051 10273	27k 2% 0,25W	
3279	4822 051 10689	68Ω 2% 0,25W	
3280	4822 051 10273	27k 2% 0,25W	
3281	4822 116 52201	75Ω 5% 0,5W	
3285	4822 051 10103	10k 2% 0,25W	
3285	4822 051 10123	12k 2% 0,25W	
3286	4822 051 10103	10k 2% 0,25W	
3286	4822 051 10123	12k 2% 0,25W	
3287	4822 051 10103	10k 2% 0,25W	
3287	4822 051 10123	12k 2% 0,25W	
3288	4822 051 10103	10k 2% 0,25W	
3288	4822 051 10123	12k 2% 0,25W	
3300	4822 051 10103	10k 2% 0,25W	
3301	4822 051 10332	3k3 2% 0,25W	
3303	4822 051 10361	360Ω 2% 0,25W	
3304	4822 051 10101	100Ω 2% 0,25W	
3305	4822 051 10104	100k 2% 0,25W	
3306	4822 051 10361	360Ω 2% 0,25W	
3310▲	4822 116 52283	4k7 5% 0,5W	
3316	4822 051 10112	1k1 2% 0,25W	
3325	4822 051 10682	6k8 2% 0,25W	
3326	4822 051 10332	3k3 2% 0,25W	
3326	4822 051 10103	10k 2% 0,25W	
3327	4822 051 10122	1k2 2% 0,25W	
3336	4822 051 10472	4k7 2% 0,25W	
3338	4822 051 10391	390Ω 2% 0,25W	
3339	4822 051 10153	15k 2% 0,25W	
3342	4822 051 20222	2k2 5% 0,1W	
3344	4822 051 10273	27k 2% 0,25W	
3345	4822 051 10102	1k 2% 0,25W	
3350	4822 051 51201	120Ω 1% 0,125W	
3351	4822 051 10472	4k7 2% 0,25W	
3353	4822 051 10332	3k3 2% 0,25W	
3360▲	4822 052 10278	2Ω7 5% 0,33W	
3361	4822 051 10102	1k 2% 0,25W	
3369	4822 051 10331	330Ω 2% 0,25W	
3370	4822 100 11391	330Ω 30% lin	
3371	4822 051 10431	430Ω 2% 0,25W	
3372	4822 051 10331	330Ω 2% 0,25W	
3375	4822 116 80176	1Ω 5% 0,5W	
3377	4822 051 10682	6k8 2% 0,25W	
3380	4822 050 11002	1k 1% 0,4W	
3382	4822 051 20222	2k2 5% 0,1W	
3383	4822 051 10333	33k 2% 0,25W	
3387	4822 050 11002	1k 1% 0,4W	
3389	4822 051 10182	1k8 2% 0,25W	
3391	4822 051 20222	2k2 5% 0,1W	
3392	4822 051 10101	100Ω 2% 0,25W	
3393	4822 051 10101	100Ω 2% 0,25W	
3394	4822 051 10101	100Ω 2% 0,25W	
3395	4822 051 10471	470Ω 2% 0,25W	
3396	4822 051 20222	2k2 5% 0,1W	
3397	4822 116 81192	12Ω 5% 0,3W	
3397	4822 052 10259	24Ω 5% 0,33W	
3398	4822 116 52175	100Ω 5% 0,5W	
3399	4822 116 52175	100Ω 5% 0,5W	
3410	4822 116 52224	470Ω 5% 0,5W	
3425	4822 116 52224	470Ω 5% 0,5W	
3426	4822 116 52224	470Ω 5% 0,5W	
3439	4822 051 10221	220Ω 2% 0,25W	
3441	4822 051 10221	220Ω 2% 0,25W	
3443	4822 051 10221	220Ω 2% 0,25W	
3450	4822 051 20222	2k2 5% 0,1W	
3451	4822 051 10432	4k3 2% 0,25W	
3451	4822 051 10103	10k 2% 0,25W	
3453	4822 051 10511	510Ω 2% 0,25W	
3454	4822 051 10101	100Ω 2% 0,25W	
3455	4822 051 10101	100Ω 2% 0,25W	
3456	4822 051 10101	100Ω 2% 0,25W	
3465	4822 051 10102	1k 2% 0,25W	
3466	4822 051 10479	47Ω 2% 0,25W	
3471	4822 116 52233	10k 5% 0,5W	
3472	4822 051 10682	6k8 2% 0,25W	
3473	4822 051 10362	3k6 2% 0,25W	

3474	4822 051 10101	100Ω 2% 0,25W	
3475	4822 051 10124	120k 2% 0,25W	
3476	4822 051 10154	150k 2% 0,25W	
3477	4822 116 52286	5k1 5% 0,5W	
3478	4822 116 52224	470Ω 5% 0,5W	
3479	4822 051 10223	22k 2% 0,25W	
3480▲	4822 052 10278	2Ω7 5% 0,33W	
3481▲	4822 052 10278	2Ω7 5% 0,33W	
3482	4822 052 10431	430Ω 5% 0,33W	
3483	4822 116 52175	100Ω 5% 0,5W	
3484	4822 051 10102	1k 2% 0,25W	
3492	4822 116 52224	470Ω 5% 0,5W	
3600	4822 051 10301	300Ω 2% 0,25W	
3602	4822 100 11212	2k2 30% lin	
3603	4822 051 10108	1Ω 5% 0,25W	
3604	4822 051 10272	2k7 2% 0,25W	
3605	4822 051 10472	4k7 2% 0,25W	
3606▲	4822 052 10279	27Ω 5% 0,33W	
3608	4822 051 10101	100Ω 2% 0,25W	
3610	4822 051 10101	100Ω 2% 0,25W	
3612	4822 051 10102	1k 2% 0,25W	
3620	4822 051 10184	180k 2% 0,25W	
3622	4822 051 10184	180k 2% 0,25W	
3624	4822 051 10102	1k 2% 0,25W	
3626	4822 051 10184	180k 2% 0,25W	
3628	4822 051 10102	1k 2% 0,25W	
3630	4822 051 10184	180k 2% 0,25W	
3632	4822 051 10102	1k 2% 0,25W	
3634	4822 051 10184	180k 2% 0,25W	
3636	4822 051 10102	1k 2% 0,25W	
3638	4822 051 10184	180k 2% 0,25W	
3640	4822 051 10102	1k 2% 0,25W	
3642	4822 051 10184	180k 2% 0,25W	
3644	4822 051 10102	1k 2% 0,25W	
3646	4822 051 10184	180k 2% 0,25W	
3650	4822 051 10392	3k9 2% 0,25W	
3651	4822 051 10123	12k 2% 0,25W	
3652	4822 051 10392	3k9 2% 0,25W	
3653	4822 051 10123	12k 2% 0,25W	
3654	4822 116 52244	15k 5% 0,5W	
3660	4822 051 10331	330Ω 2% 0,25W	
3662	4822 051 10151	150Ω 2% 0,25W	
3664	4822 051 10331	330Ω 2% 0,25W	
3665▲	4822 116 81193	15Ω 5% 0,3W	
3666	4822 051 10151	150Ω 2% 0,25W	
3668	4822 051 10331	330Ω 2% 0,25W	
3672	4822 051 10331	330Ω 2% 0,25W	
3680▲	4822 052 10279	27Ω 5% 0,33W	
3682	4822 051 10568	5Ω6 5% 0,25W	
3684	4822 116 52175	100Ω 5% 0,5W	
3686	4822 116 52175	100Ω 5% 0,5W	
3700	4822 116 52263	2k7 5% 0,5W	
3702	4822 051 10223	22k 2% 0,25W	
3704	4822 051 10102	1k 2% 0,25W	
3706▲	4822 116 81203	10Ω 5% 0,3W	
3708	4822 051 10101	100Ω 2% 0,25W	
3710	4822 051 20183	18k 5% 0,1W	
3712	4822 116 52203	91Ω 5% 0,5W	
3713	4822 116 52203	91Ω 5% 0,5W	
3714	4822 051 10828	8Ω2 5% 0,25W	
3720▲	4822 116 81203	10Ω 5% 0,3W	
3722	4822 116 52263	2k7 5% 0,5W	
3724	4822 051 10223	22k 2% 0,25W	
3726	4822 051 10102	1k 2% 0,25W	
3728	4822 051 10101	100Ω 2% 0,25W	
3730	4822 051 20183	18k 5% 0,1W	
3732	4822 116 52203	91Ω 5% 0,5W	
3733	4822 116 52203	91Ω 5% 0,5W	
3734	4822 051 10828	8Ω2 5% 0,25W	
3750	4822 051 10272	2k7 2% 0,25W	
3751	4822 051 10472	4k7 2% 0,25W	
3997▲	4822 051 10008	0Ω 5% 0,25W	
9104	4822 116 52191	33E 5% 0,5W	

Jumper

4103	4822 051 10008	0Ω 5% 0,25W	
4107	4822 051 10008	0Ω 5% 0,25W	
4108	4822 051 10008	0Ω 5% 0,25W	
4109	4822 051 10008	0Ω 5% 0,25W	
4110	4822 051 10008	0Ω 5% 0,25W	
4111	4822 051 10008	0Ω 5% 0,25W	
4112	4822 051 10008	0Ω 5% 0,25W	
4114	4822 051 10008	0Ω 5% 0,25W	
4115	4822 051 10008	0Ω 5% 0,25W	
4116	4822 051 10008	0Ω 5% 0,25W	
4117	4822 051 10008	0Ω 5% 0,25W	
4118	4822 051 10008	0Ω 5% 0,25W	
4120	4822 051 10008	0Ω 5% 0,25W	
4127	4822 051 10008	0Ω 5% 0,25W	
4130	4822 051 10008	0Ω 5% 0,25W	
4161	4822 051 10008	0Ω 5% 0,25W	
4162	4822 051 10008	0Ω 5% 0,25W	
4166	4822 051 10008	0Ω 5% 0,25W	
4167	4822 051 10008	0Ω 5% 0,25W	
4170	4822 051 10008	0Ω 5% 0,25W	
4171	4822 051 10008	0Ω 5% 0,25W	
4175	4822 051 10008	0Ω 5% 0,25W	
4184	4822 051 10008	0Ω 5% 0,25W	
4200	4822 051 10008	0Ω 5% 0,25W	
4201	4822 051 10008	0Ω 5% 0,25W	
4203	4822 051 10008	0Ω 5% 0,25W	
4205	4822 051 10008	0Ω 5% 0,25W	
4210	4822 051 10008	0Ω 5% 0,25W	
4220	4822 051 10008	0Ω 5% 0,25W	
4234	4822 051 10008	0Ω 5% 0,25W	
4235	4822 051 10008	0Ω 5% 0,25W	
4236	4822 051 10008	0Ω 5% 0,25W	
4241	4822 051 10008	0Ω 5% 0,25W	
4246	4822 051 10008	0Ω 5% 0,25W	
4255	4822 051 10008	0Ω 5% 0,25W	
4280	4822 051 10008	0Ω 5% 0,25W	
4302	4822 051 10008	0Ω 5% 0,25W	
4304	4822 051 10008	0Ω 5% 0,25W	
4306	4822 051 10008	0Ω 5% 0,25W	
4319	4822 051 10008	0Ω 5% 0,25W	
4321	4822 051 10008	0Ω 5% 0,25W	
4330	4822 051 10008	0Ω 5% 0,25W	
4331	4822 051 10008	0Ω 5% 0,25W	
4332	4822 051 10008	0Ω 5% 0,25W	
4334	4822 051 10008	0Ω 5% 0,25W	
4360	4822 051 10008	0Ω 5% 0,25W	
4361	4822 051 10008	0Ω 5% 0,25W	
4362	4822 051 10008	0Ω 5% 0,25W	
4377	4822 051 10008	0Ω 5% 0,25W	
4386	4822 051 10008	0Ω 5% 0,25W	
4420	4822 051 10008	0Ω 5% 0,25W	
4440	4822 051 10008	0Ω 5% 0,25W	
4443	4822 051 20222	2k2 5% 0,1W	
4452	4822 051 10008	0Ω 5% 0,25W	
4453	4822 051 10008	0Ω 5% 0,25W	
4454	4822 051 10008	0Ω 5% 0,25W	
4460	4822 051 10008	0Ω 5% 0,25W	
4476	4822 051 10008	0Ω 5% 0,25W	
4477	4822 051 10008	0Ω 5% 0,25W	
4496	4822 051 10008	0Ω 5% 0,25W	
4498	4822 051 10008	0Ω 5% 0,25W	
4500	4822 051 10008	0Ω 5% 0,25W	
4605	4822 051 10008	0Ω 5% 0,25W	
4610	4822 051 10008	0Ω 5% 0,25W	
4672	4822 051 10008	0Ω 5% 0,25W	
4673	4822 051 10008	0Ω 5% 0,25W	

5100	4822 157 53906	47µH 10%	
5107	4822 157 51462	10µH 10%	
5115	4822 152 20677	10µH 10%	
5270	4822 157 52983	22µH 10%	
5280	4822 157 63065	0,68µH 20%	
5303	4822 157 53302	1µH 20%	

5304	4822 157 53302	1µH 20%	
5305	4822 157 62823	26µH 6%	
5345	4822 157 62822	4,5µH 6%	
5346	4822 157 62823	26µH 6%	
5370	4822 157 62824	7,5µH 6%	
5454	4822 157 63065	0,68µH 20%	
5455	4822 157 63065	0,68µH 20%	
5456	4822 157 63065	0,68µH 20%	
5460	4822 157 63065	0,68µH 20%	

6107	4822 130 81512	LLZ-C6V2	
6108	4822 130 81512	LLZ-C6V2	
6112	4822 130 82334	BAS85	
6112▲	4822 051 10008	0Ω 5% 0,25W	
6117	4822 130 80906	LLZ-F7V5	
6120	4822 130 80446	LL4148	
6121	4822 130 80446	LL4148	
6135	4822 130 80905	LLZ-F5V1	
6136	4822 130 83086	LL4150	
6163	4822 130 81226	LLZ-F33	
6165	4822 130 80446	LL4148	
6166	4822 130 80446	LL4148	
6168	4822 130 80446	LL4148	
6172	4822 130 80906	LLZ-C7V5	
6173	4822 130 80446	LL4148	
6178	4822 130 81222	LLZ-C15	
6205	4822 130 80446	LL4148	
6206	4822 130 80446	LL4148	
6207	4822 130 80446	LL4148	
6256	4822 130 80446	LL4148	
6257	4822 130 80446	LL4148	
6280	4822 130 80446	LL4148	
6280	4822 130 82334	BAS85	
6281	4822 130 80446	LL4148	
6281	4822 130 82334	BAS85	
6342	4822 130 80888	BA682	
6343	4822 130 80888	BA682	
6345	4822 130 30841	1N4150	
6370	4822 130 83406	LLZ-F3V6	
6386	4822 130 80446	LL4148	
6387	4822 130 80954	LLZ-C5V6	
6450	4822 130 81512	LLZ-C6V2	
6465	4822 130 80446	LL4148	
6470	4822 130 80446	LL4148	
6471▲	4822 130 30621	1N4148	
6478	4822 130 82345	LLZ-C22	
6479	4822 130 80877	BAV103	
6480	4822 130 82882	LLZ-F8V2	
6481	4822 130 80881	LLZ-C33	
6610▲	4822 130 30621	1N4148	
6660	4822 130 80446	LL4148	
6661	4822 130 81223	LLZ-C2V4	
6662	4822 130 80446	LL4148	
6663	4822 130 81223	LLZ-C2V4	
6664	4822 130 80446	LL4148	
6665	4822 130 80446	LL4148	

7107	5322 130 41982	BC848B	
7108	4822 209 61887	MSM6307RS	
7119▲	5322 130 41982	BC848B	
7120▲	5322 130 41982	BC848B	
7121	4822 130 42513	BC858C	
7130	5322 130 42136	BC848C	
7137	4822 209 52316	ST24C04B	
7137	4822 209 62524	X24C16P	
7150	5322 130 42136	BC848C	
7175	5322 209 10883	PCF8574P	
7176	4822 130 42513	BC858C	
7177	4822 130 42513	BC858C	
7178▲	5322 130 41982	BC848B	
7182	5322 130 44743	BSR12	
7183▲	5322 130 41982	BC848B	

Spare parts list / Stückliste / Liste des pièces

7186	4822 209 73852	PMBT2369
7188	4822 130 60511	BC847B
7193	4822 209 61115	LF353N
7216	4822 130 42615	BC817-40
7219	4822 209 63292	TEA6414
7243	5322 130 41983	BC858B
7244▲	5322 130 41982	BC848B
7258	5322 209 10421	HEF4094BP
7260	4822 130 42615	BC817-40
7261	5322 130 42136	BC848C
7265▲	5322 130 41982	BC848B
7268	4822 130 42615	BC817-40
7270▲	5322 130 41982	BC848B
7273	4822 130 42615	BC817-40
7305	5322 130 41983	BC858B
7311▲	5322 130 41982	BC848B
7314	5322 130 42136	BC848C
7324	4822 209 63901	TDA4568/V2
7338▲	5322 130 41982	BC848B
7350▲	5322 130 41982	BC848B
7360	4822 130 42615	BC817-40
7365	4822 209 30837	TDA4650/V4/S1
7366	4822 209 31714	TDA4661/V2
7390	4822 130 42513	BC858C
7395	4822 209 30394	TDA8443B/C1
7410	4822 209 73852	PMBT2369
7430	4822 209 31592	TDA4680/V6
7450	5322 130 42755	BC847C
7451	5322 130 42755	BC847C
7471	5322 130 42136	BC848C
7480	5322 130 44921	BD943
7492	5322 130 42136	BC848C
7600	4822 209 63967	TDA8417/V3
7620	4822 209 10263	4052B
7622	4822 209 10263	4052B
7630	4822 209 61115	LF353N
7635	4822 209 61115	LF353N
7660▲	5322 130 41982	BC848B
7661▲	5322 130 41982	BC848B
7662▲	5322 130 41982	BC848B
7680	4822 209 63734	TDA8425/V7
7704▲	4822 209 83163	LM833N
7706▲	5322 130 41982	BC848B
7708	5322 130 41983	BC858B
7730▲	5322 130 41982	BC848B
7732	5322 130 41983	BC858B

Mains panel B (only FL2 styling)

Various

1001	4822 212 30763	Mains panel
▲	4822 265 40596	2P male
▲	4822 265 30389	2P male
	4822 276 13422	mains switch
3201▲	4822 053 21475	4M7 5% 0,5W

Mains filter panel B (only FL2 styling)

Various

1002	4822 212 30783	Mains filter panel
▲	4822 265 30389	2P male
▲	4822 256 30496	fuse holder
1200▲	4822 070 33151	fuse 3,15A
2200▲	4822 121 43819	680nF 10% 250V
2203▲	4822 121 40487	100nF 10% 400V
3203	4822 111 41573	470Ω
3204	4822 116 40138	PTC
3209▲	4822 113 80603	1,5Ω 10% 7W
5202	4822 157 10291	transf.assy CU28D5

Led panel H (only FL2 styling)

Various

1003	4822 212 30765	Led panel
	4822 265 31096	3P grey
	4822 265 31097	4P grey
	4822 256 92079	led holder
1100	4822 212 23281	IR receiver
2100	4822 124 40684	150µF 20% 6,3V
2131	4822 124 22606	68µF 20% 16V
3100	4822 051 10102	1k 2% 0,25W
3128	4822 051 10471	470Ω 2% 0,25W
3198	4822 051 10181	180Ω 2% 0,25W
3199	4822 051 10181	180Ω 2% 0,25W

Jumper

4129	4822 051 10008	0Ω 5% 0,25W
5100	4822 157 53906	47µH
6128	4822 130 80313	TLHG4400
6129	4822 130 83414	TLHR4405
7128	5322 130 42012	BC858
7129	5322 130 42012	BC858
7130	5322 130 42136	BC848C

Control panel H (only FL2 styling)

Various

1004	4822 212 30766	Control panel
	4822 276 13396	tack switch
	4822 265 31097	4P grey
	4822 265 41334	10P grey
3148	4822 051 10473	47k 2% 0,25W
3149	4822 051 10473	47k 2% 0,25W
3150	4822 051 10473	47k 2% 0,25W
3161	4822 116 52224	470Ω 5% 0,5W
3162	4822 116 52224	470Ω 5% 0,5W
3163	4822 116 52224	470Ω 5% 0,5W
3164	4822 116 52224	470Ω 5% 0,5W
3165	4822 116 52224	470Ω 5% 0,5W
3166	4822 051 10471	470Ω 2% 0,25W
3167	4822 051 10471	470Ω 2% 0,25W

Jumper

4101	4822 051 10008	0Ω 5% 0,25W
4102	4822 051 10008	0Ω 5% 0,25W
4103	4822 051 10008	0Ω 5% 0,25W
4104	4822 051 10008	0Ω 5% 0,25W
6131	4822 130 83407	LSS260-DO
6132	4822 130 83407	LSS260-DO
6133	4822 130 83407	LSS260-DO
6134	4822 130 83407	LSS260-DO
6135	4822 130 83407	LSS260-DO
6136	4822 130 83407	LSS260-DO
6137	4822 130 83407	LSS260-DO
7131	5322 130 42012	BC858
7132	5322 130 42012	BC858
7133	5322 130 42012	BC858
7134	5322 130 42012	BC858
7135	5322 130 42012	BC858
7136	5322 130 42012	BC858
7137	5322 130 42012	BC858

Connector panel C (only FL2 styling)

Various

1005	4822 212 30764	Connector panel
	4822 267 20454	socket headph. +cinch+SVHS
	4822 264 40207	3P male
	4822 265 41335	11P
2241	4822 121 42408	220nF 5% 63V
2640	5322 122 31842	330pF 2% 63V
2644	5322 122 31842	330pF 2% 63V
2716	4822 122 32597	6,8nF 10% 63V
2736	4822 122 32597	6,8nF 10% 63V
3241	4822 051 10759	75Ω 2% 0,25W
3251	4822 051 10759	75Ω 2% 0,25W
3252	4822 051 10759	75Ω 2% 0,25W
3640	4822 051 10102	1k 2% 0,25W
3644	4822 051 10102	1k 2% 0,25W

Jumper

4252	4822 051 10008	0Ω 5% 0,25W
4253	4822 051 10008	0Ω 5% 0,25W

Scavem amplifier panel

Various

1002	4822 212 23804	Scavem panel
	4822 265 20509	2P grey
	4822 265 30351	5P male
	4822 264 40207	3P male
	4822 265 20512	2P green
2420	4822 122 31797	22nF 10% 63V
2490	4822 124 40435	10µF 20% 50V
2491	4822 122 33496	100nF 10% 63V
2604	4822 124 22427	47µF 20% 40V
2605	4822 122 33496	100nF 10% 63V
2606	4822 124 22427	47µF 20% 40V
2607	4822 122 33496	100nF 10% 63V
2620	4822 122 33496	100nF 10% 63V
2622▲	4822 122 32442	10nF 50V
2624	4822 122 33496	100nF 10% 63V
2625	4822 124 40255	100µF 20% 63V
2626	4822 122 31727	470pF 2% 63V
2627	4822 122 31727	470pF 2% 63V
2632	4822 122 33496	100nF 10% 63V
2633	4822 122 33496	100nF 10% 63V
2634	4822 122 33496	100nF 10% 63V
2635	4822 122 33496	100nF 10% 63V
2636	4822 122 33496	100nF 10% 63V
2637	4822 122 33496	100nF 10% 63V
2647	4822 124 40255	100µF 20% 63V
2671	4822 122 31768	180pF 2% 63V
2672	4822 122 31768	180pF 2% 63V
3400	4822 051 10473	47k 2% 0,25W
3401	4822 051 10104	100k 2% 0,25W
3402	4822 051 10104	100k 2% 0,25W
3410	4822 051 10473	47k 2% 0,25W
3411	4822 051 10104	100k 2% 0,25W
3412	4822 051 10104	100k 2% 0,25W
3413	4822 050 11002	1k 1% 0,4W
3420	4822 051 10473	47k 2% 0,25W
3421	4822 051 10473	47k 2% 0,25W
3423	4822 051 10104	100k 2% 0,25W
3424	4822 051 10104	100k 2% 0,25W
3425	4822 051 10473	47k 2% 0,25W
3426	4822 053 12821	820Ω 5% 3W
3430	4822 051 10473	47k 2% 0,25W
3431	4822 051 10473	47k 2% 0,25W
3432	4822 051 10103	10k 2% 0,25W
3433	4822 051 10104	100k 2% 0,25W
3434	4822 051 10104	100k 2% 0,25W
3435	4822 051 10473	47k 2% 0,25W
3440	4822 051 10101	100Ω 2% 0,25W
3441	4822 051 10101	100Ω 2% 0,25W
3490	4822 116 52276	3k9 5% 0,5W
3491	4822 116 52276	3k9 5% 0,5W
3609▲	4822 052 10478	4Ω7 5% 0,33W
3610▲	4822 052 10478	4Ω7 5% 0,33W
3630▲	4822 053 10331	330Ω 5% 1W
3631▲	4822 053 10331	330Ω 5% 1W
3633	4822 051 10152	1k5 2% 0,25W
3634	4822 051 10132	1k3 2% 0,25W
3635	4822 051 10339	33Ω 2% 0,25W
3636	4822 051 10479	47Ω 2% 0,25W
3637▲	4822 116 52215	220Ω 5% 0,5W
3638▲	4822 053 10331	330Ω 5% 1W
3639▲	4822 053 10331	330Ω 5% 1W
3640	202	2k 2% 0,25W
3658	4822 051 10331	330Ω 2% 0,25W
3659	4822 051 10202	2k 2% 0,25W
3661	4822 051 10912	9k1 2% 0,25W
3670	4822 051 10822	8k2 2% 0,25W
3671	4822 051 10822	8k2 2% 0,25W

Jumper

4612	4822 051 10008	0Ω 5% 0,25W
5612	4822 157 63507	0,18µH
5613	4822 157 63507	0,18µH
5614	4822 157 63507	0,18µH
5615	4822 157 63507	0,18µH
5630	4822 157 50965	15µH 10%
5631	4822 157 50965	15µH 10%
5632	4822 157 50965	15µH 10%
5633	4822 157 50965	15µH 10%
6426	4822 130 80906	LLZ-C7V5
6427	4822 130 80906	LLZ-C7V5
6490	4822 130 80884	LLZ-C5V1
6610	4822 130 80884	LLZ-C5V1
6616	4822 130 80884	LLZ-C5V1

Spare parts list / Stückliste / Liste des pièces

7400	4822 130 42705	BC847
7401	5322 130 42756	BC857C
7410	4822 130 42705	BC847
7411	5322 130 42756	BC857C
7420	4822 130 42705	BC847
7421	4822 130 42705	BC847
7423	5322 130 42756	BC857C
7425	5322 130 42755	BC847C
7430	4822 130 42705	BC847
7431	4822 130 42705	BC847
7433	5322 130 42756	BC857C
7435	5322 130 42755	BC847C
7440	4822 209 63896	PCF8574AP
7608	4822 130 61207	BC848
7610	4822 130 41746	BD825
7611	4822 130 42589	BF370
7612	4822 130 41746	BD825
7613	4822 130 41774	BD826
7614	4822 130 41746	BD825
7615	4822 130 41774	BD826
7616	4822 130 41746	BD825
7617	4822 130 42589	BF370
7618	4822 130 42705	BC847
7619	4822 130 61233	BC857
7620	4822 130 42705	BC847
7621	4822 130 61233	BC857

DAF panel

Various

1003	4822 212 23805	DAF panel
▲	4822 265 40596	2P male
	4822 267 41018	2P male
	4822 265 20509	2P male grey
2860	4822 126 12084	390pF 10% 2kV
2861	4822 126 12084	390pF 10% 2kV
3301	4822 116 21211	VDR
3302	4822 116 21211	VDR
5860	4822 148 81242	transf. DAF

Scavem filter panel

Various

1005	4822 212 23819	Scavem filter
	4822 265 31072	5P male
	4822 265 31085	5P male
2500	4822 122 31774	56pF 2% 63V
2501	4822 124 40435	10µF 20% 50V
2502	4822 124 40255	100µF 20% 63V
2503▲	4822 122 32442	10nF 50V
2508	4822 122 33496	100nF 10% 63V
2509▲	4822 122 32442	10nF 50V
2510	4822 126 11492	220nF 10% 50V
2511	4822 122 31767	150pF 2% 63V
2512	4822 122 33496	100nF 10% 63V
2513	4822 122 33496	100nF 10% 63V
2514▲	4822 122 32442	10nF 50V
2515▲	4822 122 32442	10nF 50V
2516	4822 122 31767	150pF 2% 63V
2517	4822 122 32083	8,2pF 5% 50V
2518	4822 122 32083	8,2pF 5% 50V
2519▲	4822 122 32442	10nF 50V
2529	4822 122 33496	100nF 10% 63V

3500	4822 051 10821	820Ω 2% 0,25W
3501	4822 116 52214	200Ω 5% 0,5W
3507▲	4822 052 10478	4Ω7 5% 0,33W
3512	4822 051 10101	100Ω 2% 0,25W
3513	4822 051 10103	10k 2% 0,25W
3514	4822 051 10334	330k 2% 0,25W
3515	4822 051 10123	12k 2% 0,25W
3516	4822 051 10391	390Ω 2% 0,25W
3517	4822 051 10561	560Ω 2% 0,25W
3518	4822 051 10271	270Ω 2% 0,25W
3519	4822 051 10271	270Ω 2% 0,25W
3521	4822 051 10101	100Ω 2% 0,25W
3522	4822 051 10182	1k8 2% 0,25W
3523	4822 051 10182	1k8 2% 0,25W
3524	4822 051 10339	33Ω 2% 0,25W
3524	4822 051 10221	220Ω 2% 0,25W
3525	4822 051 10102	1k 2% 0,25W
3526	4822 051 10102	1k 2% 0,25W
3527	4822 051 10471	470Ω 2% 0,25W
3528	4822 051 10829	82Ω 2% 0,25W
3529	4822 051 10682	6k8 2% 0,25W

Jumper

4502	4822 051 10008	0Ω 5% 0,25W
5501	4822 157 50965	15µH 10%
5502	4822 157 50965	15µH 10%
5503	4822 157 50965	15µH 10%
6502	4822 130 80446	LL4148
6503	5322 130 34337	BAV99
6504	5322 130 34337	BAV99
6505	5322 130 34337	BAV99
7503	4822 130 61207	BC848
7504	4822 209 30404	NE592/N8
7505	4822 130 41594	PH2369
7506	4822 130 61207	BC848
7507	4822 130 61207	BC848
7509	5322 130 60646	BSR57
7525	5322 130 42012	BC858

Panoramic-view panel

Various

1028	4822 212 30832	Panoramic view 32"
1028	4822 212 30833	Panoramic view 28"
1028	4822 212 30835	Panoramic view 36"
	4822 265 20509	2P grey
	4822 267 41018	2P red
	4822 267 40666	3P male
	4822 264 40207	3P male
2101	4822 121 51563	560nF 5% 250V
2102	4822 121 51563	560nF 5% 250V
2105	4822 124 80341	1µF 20% 160V
2106	4822 124 80341	1µF 20% 160V
2110	4822 121 51563	560nF 5% 250V
2110	4822 121 70281	510nF 5% 400V
2110▲	4822 121 43397	680nF 5% 250V
2140	4822 126 12784	22nF +80-20% 100V
2141	4822 124 40255	100µF 20% 63V

3100	4822 116 52258	220k 5% 0,5W
3101	4822 116 52274	36k 5% 0,5W
3102▲	4822 116 52215	220Ω 5% 0,5W
3105	4822 116 52267	30k 5% 0,5W
3106	4822 116 52267	30k 5% 0,5W
3110▲	4822 116 52197	56Ω 5% 0,5W
3111▲	4822 116 52197	56Ω 5% 0,5W
3115	4822 116 80176	1Ω 5% 0,5W
3121	4822 116 52296	6k8 5% 0,5W
3122	4822 116 52296	6k8 5% 0,5W
3140	4822 116 52175	100Ω 5% 0,5W
3141	4822 116 52175	100Ω 5% 0,5W
3142▲	4822 116 52283	4k7 5% 0,5W
3143	4822 116 52256	2k2 5% 0,5W
3144▲	4822 116 52283	4k7 5% 0,5W
3145	4822 116 52296	6k8 5% 0,5W
3146	4822 116 52296	6k8 5% 0,5W
3198	4822 051 10333	33k 2% 0,25W
3198	4822 116 52264	27k 5% 0,5W
3198	4822 116 52274	36k 5% 0,5W
3199	4822 051 10333	33k 2% 0,25W
3199	4822 116 52264	27k 5% 0,5W
3199	4822 116 52274	36k 5% 0,5W
5110	4822 157 63256	coil CU15
6100▲	4822 130 32896	BYD33M
6101▲	4822 130 32896	BYD33M
6103	4822 130 34499	BZX79-C20
6120	4822 130 34233	BZX79-C5V1
7100	4822 130 63364	IRFI640G
7140	4822 209 63896	PCF8574AP
7141	4822 130 44257	BC547
7142▲	4822 209 32126	SOC1012T

Picture tube panel E

1040	4822 212 30789	PTP-16/9-28"
1040	4822 212 30791	PTP-16/9-32"
1040	4822 212 23803	PTP-16/9-36"
1040	4822 212 30782	PTP-4/3-25"-28"
1040	4822 212 30856	PTP-4/3-33"
	4822 267 51249	socket for CRT 28" 16/9
	4822 267 51248	socket for CRT 32" 16/9
	4822 255 70246	socket for CRT 36" 16/9
	4822 267 51225	socket for CRT 4/3
	4822 265 20509	2P male grey
▲	4822 265 40596	2P male Vg2
	4822 267 40985	6P male
	4822 265 41107	7P male

Various

	4822 492 70788	spring fix IC
	4822 404 31199	bracket
2700	4822 126 11824	100pF 10% 1kV
2701	4822 122 32507	6,8pF 55 50V
2701	4822 122 31971	10pF 10% 50V
2701	4822 122 32139	12pF 2% 63V
2702	4822 122 31784	4,7nF 10% 50V
2703	4822 121 42068	33nF 10% 400V
2704	4822 122 31746	1000pF 2% 63V
2705	4822 124 40433	47µF 20% 25V
2705	4822 124 40196	220µF 20% 16V
2706	4822 122 31797	22nF 10% 63V

2707	4822 121 51562	33nF 1,6kV
2707	4822 121 70093	33nF 5% 2kV
2708	5322 122 31842	330pF 2% 63V
2708	4822 122 31773	560pF 2% 63V
2709	4822 124 80091	4,7µF 20% 250V
2710	4822 122 31797	22nF 10% 63V
2711	4822 122 32507	6,8pF 55 50V
2711	4822 122 31971	10pF 2% 63V
2712	4822 122 31784	4,7nF 10% 50V
2713	4822 121 42068	33nF 10% 400V
2714	4822 122 31746	1000pF 2% 63V
2715	4822 121 42068	33nF 10% 400V
2720	4822 122 31825	27pF 2% 63V
2721	4822 122 31971	10pF 2% 63V
2721	4822 122 32504	15pF 2% 63V
2722	4822 122 31784	4,7nF 10% 50V
2724	4822 122 31746	1000pF 2% 63V
2725	4822 122 31774	56pF 2% 63V
2726	4822 122 31774	56pF 2% 63V
2727	4822 122 31774	56pF 2% 63V
2729	4822 121 41156	68nF 10% 250V
3700	4822 051 20222	2k2 5% 0,1W
3701▲	4822 052 11108	1Ω 5% 0,5W
3701	4822 052 11338	3Ω3 5% 0,5W
3702	4822 051 10201	200Ω 2% 0,25W
3703▲	4822 052 11108	1Ω 5% 0,5W
3703	4822 052 11338	3Ω3 5% 0,5W
3704	4822 051 10222	2k2 2% 0,25W
3704	4822 051 10272	2k7 2% 0,25W
3705▲	4822 051 10242	2k4 2% 0,25W
3705	4822 051 10332	3k3 2% 0,25W
3706	4822 050 21204	120k 1% 0,6W
3706	4822 050 21504	150k 1% 0,6W
3707▲	4822 051 10008	0Ω 5% 0,25W
3708	4822 111 50579	680Ω 10% 0,5W
3709	4822 051 10124	120k 2% 0,25W
3709	4822 051 10154	150k 2% 0,25W
3710	4822 051 10822	8k2 2% 0,25W
3710	4822 051 10333	33k 2% 0,25W
3712	4822 051 10201	200Ω 2% 0,25W
3714	4822 051 20222	2k2 5% 0,1W
3714	4822 051 10272	2k7 2% 0,25W
3715▲	4822 051 10242	2k4 2% 0,25W
3715	4822 051 10332	3k3 2% 0,25W
3716	4822 050 21204	120k 1% 0,6W
3716	4822 050 21504	150k 1% 0,6W
3718	4822 111 50579	680Ω 10% 0,5W
3719	4822 051 10333	33k 2% 0,25W
3720	4822 051 10823	82k 2% 0,25W
3722	4822 051 10201	200Ω 2% 0,25W
3723	4822 050 11002	1k 1% 0,4W
3724	4822 051 20222	2k2 5% 0,1W
3724	4822 051 10272	2k7 2% 0,25W
3725▲	4822 051 10242	2k4 2% 0,25W
3725	4822 051 10332	3k3 2% 0,25W
3726	4822 050 21204	120k 1% 0,6W
3726	4822 050 21504	150k 15 0,6W
3727	4822 111 50518	1k5 5% 0,5W
3728	4822 111 41572	220Ω 10% 0,5W
3728	4822 111 50579	680Ω 10% 0,5W
3730	4822 111 50518	1k5 5% 0,5W
3731▲	4822 052 10279	27Ω 5% 0,33W
3732▲	4822 052 10189	18Ω 5% 0,33W
3733▲	4822 051 10008	0Ω 5% 0,25W
3734	4822 050 21604	160k 1% 0,6W
3735	4822 051 10103	10k 2% 0,25W
3736	4822 051 10333	33k 2% 0,25W
3737	4822 051 10123	12k 2% 0,25W
3737	4822 051 10153	15k 2% 0,25W
3737	4822 051 10203	20k 2% 0,25W
3738	4822 053 12823	82k 5% 3W

3739	4822	
3740	4822	
3741	4822	
3742	4822	
3743	4822	
3744▲	4822	
3750	4822	
3750	4822	
3750	4822	
3750	4822	

Jumper

4701	4822	
4702	4822	
4703	4822	
4704	4822	
5700	4822	
5700	4822	
5703	4822	
6700	4822	
6701	4822	
6702	4822	
6703	4822	
6707	4822	
6708▲	4822	
6709	4822	
6709	4822	
6710	4822	
6711	4822	
6712	4822	
7704	4822	
7705	4822	
7706	4822	
7707	4822	

LFR bo

1750	4822	
1750	4822	
1750	4822	
	4822	
	4822	

Various

1001	4822	
1002	4822	
2000	4822	
2001	4822	
2002	4822	
2003	4822	
2004	4822	
2005	4822	
2006	4822	
2007	4822	
2010	4822	
2011	4822	
2012	4822	
2013	4822	
2014	4822	
2015	4822	
2016	4822	
2017	4822	

3739	4822 101 11185	47k 10%
3740	4822 050 21604	160k 1% 0,6W
3741	4822 116 52221	360Ω 5% 0,5W
3742	4822 116 52221	360Ω 5% 0,5W
3743	4822 116 52221	360Ω 5% 0,5W
3744▲	4822 052 10229	22Ω 5% 0,33W
3750	4822 051 10103	10k 2% 0,25W
3750	4822 051 10223	22k 2% 0,25W
3750	4822 051 10333	33k 2% 0,25W
3750	4822 051 10563	56k 2% 0,25W

Jumper

4701	4822 051 10008	0Ω 5% 0,25W
4702	4822 051 10008	0Ω 5% 0,25W
4703	4822 051 10008	0Ω 5% 0,25W
4704	4822 051 10008	0Ω 5% 0,25W

5700	4822 157 70636	82µH 5%
5700	4822 157 70635	33µH 7,5%
5703	4822 157 70635	33µH 7,5%

6700	4822 130 80879	LLZ-C3V0
6701	4822 130 80877	BAV103
6702	4822 130 80877	BAV103
6703	4822 130 80877	BAV103
6707	4822 130 82345	LLZ-C22
6708▲	4822 130 32896	BYD33M
6709	4822 130 82969	BZD23-C24
6709	4822 130 34379	BZX79-C27
6710	4822 130 30842	BAV21
6711	4822 130 30842	BAV21
6712	4822 130 30842	BAV21

7704	4822 130 60373	BC856B
7705	4822 209 30417	TDA6111Q/N2
7706	4822 209 30417	TDA6111Q/N2
7707	4822 209 30417	TDA6111Q/N2

LFR box M L

1750	4822 212 30795	LFR box FL1.16
1750	4822 212 30796	LFR box FL1.14 28"-32"
1750	4822 212 30587	LFR box FL1.14 36"
	4822 265 61259	IC socket 68P
	4822 265 41328	10P female

Various

1001	4822 242 72572	crystal 12MHz
1002	4822 242 71417	crystal 13,875 MHz

2000	4822 122 33496	100nF 10% 63V
2001	4822 122 33496	100nF 10% 63V
2002	4822 122 33496	100nF 10% 63V
2003	4822 122 33496	100nF 10% 63V
2004	4822 122 33496	100nF 10% 63V
2005	4822 122 33496	100nF 10% 63V
2006	4822 124 40731	330µF 20% 6,3V
2007	4822 122 33496	100nF 10% 63V
2010	4822 122 33496	100nF 10% 63V
2011	4822 122 33496	100nF 10% 63V
2012	4822 122 33496	100nF 10% 63V
2013	4822 122 33496	100nF 10% 63V
2014	4822 122 33496	100nF 10% 63V
2015	4822 122 33496	100nF 10% 63V
2016	4822 122 33496	100nF 10% 63V
2017	4822 122 33496	100nF 10% 63V
2018	4822 122 33496	100nF 10% 63V
2022	4822 122 33496	100nF 10% 63V
2023	4822 122 33496	100nF 10% 63V
2026	4822 122 32083	8,2pF 5% 50V
2027	4822 122 31961	68pF 2% 63V
2028	4822 122 31772	47pF 2% 63V
2029	4822 122 33496	100nF 10% 63V
2030	4822 122 32083	8,2pF 5% 50V
2031	4822 122 31767	150pF 2% 63V
2032	4822 122 31772	47pF 2% 63V
2033	4822 122 32083	8,2pF 5% 50V
2034	4822 122 33496	100nF 10% 63V
2035	4822 122 31767	150pF 2% 63V
2036	4822 122 31772	47pF 2% 63V
2037	4822 122 31765	100pF 2% 63V
2038	4822 122 31765	100pF 2% 63V
2039	4822 124 41643	100µF 20% 16V
2040	4822 122 33496	100nF 10% 63V
2041	4822 122 31825	27pF 2% 63V
2043▲	4822 122 32442	10nF 50V
2044▲	4822 122 32442	10nF 50V
2045	4822 124 41576	2,2µF 20% 50V
2046	4822 124 40435	10µF 20% 50V
2047	4822 122 32504	15pF 2% 63V
2048	4822 124 41576	2,2µF 20% 50V
2049	4822 122 33496	100nF 10% 63V
2050	4822 124 41997	470µF 10V
2051	4822 122 32504	15pF 2% 63V
2052	4822 122 32142	270pF 2% 63V
2053	4822 122 32891	68nF 10% 63V
2054	4822 122 32504	15pF 2% 63V
2055	5322 122 31647	1nF 10% 63V
2056	4822 122 31727	470pF 2% 63V
2057	4822 122 31797	22nF 10% 63V
2058	4822 122 32142	270pF 2% 63V
2059	4822 122 31765	100pF 2% 63V
2060	4822 122 31772	47pF 2% 63V
2061	4822 122 31772	47pF 2% 63V
2062	4822 122 31772	47pF 2% 63V
2063	4822 122 31772	47pF 2% 63V
2064	4822 124 41643	100µF 20% 16V
2065	4822 122 33496	100nF 10% 63V
2066	4822 122 33496	100nF 10% 63V
2067	4822 122 33496	100nF 10% 63V
2068	4822 122 33496	100nF 10% 63V
2069	4822 122 33496	100nF 10% 63V
2070	4822 122 33496	100nF 10% 63V
2071	4822 124 41643	100µF 20% 16V
2072	5322 122 31647	1nF 10% 63V
2073	4822 122 31839	82pF 2% 63V
2074	4822 122 31981	33nF 5% 50V
2075	4822 122 33496	100nF 10% 63V
2076	5322 122 31842	330pF 2% 63V
2077	4822 124 41576	2,2µF 20% 50V
2078	4822 122 33496	100nF 10% 63V
2079	4822 121 42937	2,7nF 1% 250V
2080	5322 124 41431	22µF 20% 35V
2081	4822 124 41577	4,7µF 20% 50V
2082	4822 122 31772	47pF 2% 63V
2083	4822 122 33496	100nF 10% 63V
2084	4822 122 33496	100nF 10% 63V
2085	4822 122 31765	100pF 2% 63V
2086	4822 122 31825	27pF 2% 63V
2087	4822 122 31825	27pF 2% 63V
2088	4822 122 31797	22nF 10% 63V
2090	4822 122 31772	47pF 2% 63V
2091	4822 122 31746	1000pF 2% 63V
2092	4822 124 40433	47µF 20% 25V
2093	4822 124 41997	470µF 10V
2094	4822 122 33496	100nF 10% 63V
2095	4822 122 33496	100nF 10% 63V
2096	4822 122 31644	2,2nF 10% 63V
2097	4822 122 31746	1000pF 2% 63V
2098	4822 124 22606	68µF 20% 16V
2099	4822 122 33496	100nF 10% 63V
2100	4822 122 33496	100nF 10% 63V
2102	4822 122 31644	2,2nF 10% 63V
2103	4822 124 41097	220µF 20% 16V
2105	4822 122 33496	100nF 10% 63V
2106	4822 124 41643	100µF 20% 16V
2107	4822 122 33496	100nF 10% 63V
2108	4822 122 31765	100pF 2% 63V
2109	4822 122 32506	5,6pF 5% 50V
2110	4822 122 31765	100pF 2% 63V
2111	5322 122 31842	330pF 2% 63V
2112	4822 122 31981	33nF 5% 50V
2113	4822 122 31644	2,2nF 10% 63V
2114	4822 126 11492	220nF 10% 50V
2115	4822 126 11492	220nF 10% 50V
2116	4822 122 31768	180pF 2% 63V
2117▲	4822 122 32442	10nF 50V
2118	4822 122 33496	100nF 10% 63V
2119	4822 122 33496	100nF 10% 63V
2120	4822 122 31965	220pF 2% 63V
2121	4822 122 31965	220pF 2% 63V
2122	5322 122 31842	330pF 2% 63V
2123	4822 122 33496	100nF 10% 63V
2124	4822 122 31767	150pF 2% 63V
2125	4822 122 33498	2,7nF 10% 63V
2126	4822 122 33496	100nF 10% 63V
2127	4822 122 33496	100nF 10% 63V
2128	4822 122 31767	150pF 2% 63V
2129	4822 122 33496	100nF 10% 63V
2130	4822 122 31771	390pF 2% 63V
2131	4822 122 31825	27pF 2% 63V
2132	5322 122 31842	330pF 2% 63V
2133	4822 122 31825	27pF 2% 63V
2134	4822 122 31771	390pF 2% 63V
2136	4822 122 31825	27pF 2% 63V
2150	4822 124 40433	47µF 20% 25V
2151	4822 122 31772	47pF 2% 63V
2152	4822 122 33496	100nF 10% 63V
2153	4822 122 31772	47pF 2% 63V
2160	4822 122 33498	2,7nF 10% 63V
2161	4822 122 31825	27pF 2% 63V
2162	4822 122 31971	10pF 2% 63V
2163	4822 126 11492	220nF 10% 50V
2164	4822 122 31971	10pF 2% 63V
2165	4822 126 10324	33pF 2% 63V
2166	4822 122 31772	47pF 2% 63V
2167	4822 122 31772	47pF 2% 63V
2168	4822 126 10324	33pF 2% 63V
2169	4822 124 40849	330µF 20% 16V
2170	4822 122 32139	12pF 2% 63V
2172	4822 122 31839	82pF 2% 63V
2175	4822 122 33496	100nF 10% 63V
2179	4822 122 33496	100nF 10% 63V
2180	4822 122 31797	22nF 10% 63V
2181	4822 122 31772	47pF 2% 63V
2184	4822 122 32139	12pF 2% 63V
2185	4822 124 40433	47µF 20% 25V
2186	4822 124 40433	47µF 20% 25V
2187	4822 124 40731	330µF 20% 6,3V
2188	4822 122 31772	47pF 2% 63V
2190	4822 126 11492	220nF 10% 50V

3000	4822 051 10162	1k6 2% 0,25W
3001▲	4822 111 41424	22Ω 5% 0,3W
3002▲	4822 051 10242	2k4 2% 0,25W
3003	4822 051 10682	6k8 2% 0,25W
3004	4822 051 10472	4k7 2% 0,25W
3006	4822 050 24708	4Ω7 1% 0,6W
3007	4822 051 10209	20Ω 2% 0,25W
3008▲	4822 051 10008	0Ω 5% 0,25W
3009	4822 051 10829	82Ω 2% 0,25W
3011	4822 051 10101	100Ω 2% 0,25W
3012	4822 051 10339	33Ω 2% 0,25W
3013	4822 051 52201	220Ω 1% 0,125W
3014	4822 051 10101	100Ω 2% 0,25W
3016	4822 051 10759	75Ω 2% 0,25W
3017	4822 051 53601	360Ω 1% 0,125W
3019	4822 111 41423	18Ω 5% 0,3W
3021	4822 051 10101	100Ω 2% 0,25W
3022	4822 051 10101	100Ω 2% 0,25W
3023▲	4822 051 10008	0Ω 5% 0,25W
3024	4822 051 10473	47k 2% 0,25W
3025	4822 051 10102	1k 2% 0,25W
3026	4822 051 10181	180Ω 2% 0,25W
3027	4822 051 10132	1k3 2% 0,25W
3028	4822 051 10221	220Ω 2% 0,25W
3029	4822 051 10683	68k 2% 0,25W
3030	4822 051 10681	680Ω 2% 0,25W
3031	4822 051 10561	560Ω 2% 0,25W
3032	4822 051 10561	560Ω 2% 0,25W
3033	4822 051 10561	560Ω 2% 0,25W
3034	4822 051 10759	75Ω 2% 0,25W
3035	4822 051 20222	2k2 5% 0,1W
3036	4822 051 10221	220Ω 2% 0,25W
3037▲	4822 111 41424	22Ω 5% 0,3W
3038	4822 051 10103	10k 2% 0,25W
3039	4822 051 10683	68k 2% 0,25W
3040	4822 051 10104	100k 2% 0,25W
3041	4822 051 10561	560Ω 2% 0,25W
3042	4822 051 10102	1k 2% 0,25W
3043	4822 051 10103	10k 2% 0,25W
3044▲	4822 052 10279	27Ω 5% 0,33W
3045	4822 051 10162	1k6 2% 0,25W
3046	4822 051 10272	2k7 2% 0,25W
3047	4822 051 10332	3k3 2% 0,25W
3048	4822 051 10562	5k6 2% 0,25W
3049	4822 051 10229	22Ω 2% 0,25W
3050	4822 051 10122	1k2 2% 0,25W
3051	4822 051 10333	33k 2% 0,25W
3052	4822 051 10513	51k 2% 0,25W
3053	4822 051 10821	820Ω 2% 0,25W
3054	4822 100 20166	10k 30% LIN
3055	4822 051 10181	180Ω 2% 0,25W
3055	4822 051 10201	200Ω 2% 0,25W
3055	4822 051 10221	220Ω 2% 0,25W
3056	4822 051 10472	4k7 2% 0,25W
3057	4822 051 10472	4k7 2% 0,25W
3058	4822 051 10472	4k7 2% 0,25W
3060	4822 051 10123	12k 2% 0,25W
3061	4822 051 10622	6k2 2% 0,25W
3062	4822 051 10103	10k 2% 0,25W
3063	4822 051 10471	470Ω 2% 0,25W
3064	4822 051 10104	100k 2% 0,25W
3065	4822 051 10223	22k 2% 0,25W
3066▲	4822 051 10242	2k4 2% 0,25W
3067	4822 051 10109	10Ω 2% 0,25W
3068	4822 051 10103	10k 2% 0,25W
3071▲	4822 051 10008	0Ω 5% 0,25W
3074▲	4822 051 10242	2k4 2% 0,25W
3075	4822 051 10103	10k 2% 0,25W
3076	4822 051 10221	220Ω 2% 0,25W
3078	4822 051 10223	22k 2% 0,25W
3079	4822 051 10471	470Ω 2% 0,25W
3082	4822 051 20222	2k2 5% 0,1W
3083	4822 051 20222	2k2 5% 0,1W
3084	4822 051 10473	47k 2% 0,25W
3085▲	4822 116 81193	15Ω 5% 0,3W
3086	4822 051 10473	47k 2% 0,25W
3087	4822 051 10151	150Ω 2% 0,25W
3087	4822 051 10181	180Ω 2% 0,25W
3087	4822 051 10471	470Ω 2% 0,25W
3089	4822 116 81192	12Ω 5% 0,3W
3090	4822 051 10102	1k 2% 0,25W
3091	4822 051 51201	120Ω 1% 0,125W
3092	4822 051 10224	220k 2% 0,25W
3093	4822 051 10104	100k 2% 0,25W

Spare parts list / Stückliste / Liste des pièces

% 0,25W	3094	4822 051 10124	120k 2% 0,25W
% 0,125W	3095	4822 051 10223	22k 2% 0,25W
% 0,25W	3096	4822 051 10479	47Ω 2% 0,25W
% 0,25W	3097	4822 051 10223	22k 2% 0,25W
% 0,125W	3098	4822 051 10151	150Ω 2% 0,25W
% 0,3W	3099	4822 051 10272	2k7 2% 0,25W
% 0,25W	3100	4822 051 10221	220Ω 2% 0,25W
% 0,25W	3101	4822 051 10122	1k2 2% 0,25W
0,25W	3102	4822 051 20222	2k2 5% 0,1W
0,25W	3103	4822 051 10102	1k 2% 0,25W
0,25W	3104	4822 051 53301	330Ω 1% 0,125W
% 0,25W	3105	4822 051 10472	4k7 2% 0,25W
0,25W	3106	4822 051 10152	1k5 2% 0,25W
% 0,25W	3107	4822 051 52201	220Ω 1% 0,125W
0,25W	3108	4822 051 10472	4k7 2% 0,25W
% 0,25W	3109	4822 051 10109	10Ω 2% 0,25W
% 0,25W	3110	4822 051 10681	680Ω 2% 0,25W
% 0,25W	3111	4822 051 10102	1k 2% 0,25W
% 0,25W	3112	4822 051 10181	180Ω 2% 0,25W
% 0,25W	3113	4822 051 10152	1k5 2% 0,25W
0,1W	3114	4822 051 53601	360Ω 1% 0,125W
% 0,25W	3115	4822 051 10101	100Ω 2% 0,25W
% 0,3W	3116	4822 051 10472	4k7 2% 0,25W
0,25W	3117	4822 051 10102	1k 2% 0,25W
0,25W	3118	4822 051 56201	620Ω 1% 0,125W
% 0,25W	3119	4822 051 10103	10k 2% 0,25W
% 0,25W	3120	4822 051 10271	270Ω 2% 0,25W
0,25W	3121	4822 051 10272	2k7 2% 0,25W
0,25W	3123	4822 051 10221	220Ω 2% 0,25W
% 0,33W	3125	4822 051 52701	270Ω 1% 0,125W
0,25W	3127	4822 051 59101	910Ω 1% 0,125W
0,25W	3128	4822 051 10271	270Ω 2% 0,25W
0,25W	3160	4822 051 10562	5k6 2% 0,25W
0,25W	3161	4822 051 20222	2k2 5% 0,1W
% 0,25W	3162	4822 051 10102	1k 2% 0,25W
0,25W	3163	4822 051 20222	2k2 5% 0,1W
0,25W	3166	4822 051 10569	56Ω 2% 0,25W
0,25W	3167	4822 051 53301	330Ω 1% 0,125W
% 0,25W	3168	4822 051 10471	470Ω 2% 0,25W
% LIN	3169	4822 051 10103	10k 2% 0,25W
% 0,25W	3176	4822 051 10221	220Ω 2% 0,25W
% 0,25W	3180	4822 051 10101	100Ω 2% 0,25W
% 0,25W	3181	4822 051 10101	100Ω 2% 0,25W
0,25W	3182	4822 051 10102	1k 2% 0,25W
0,25W	3183	4822 051 10471	470Ω 2% 0,25W
0,25W	3184	4822 051 10101	100Ω 2% 0,25W
0,25W	3201	4822 051 10102	1k 2% 0,25W
0,25W	3202	4822 051 10102	1k 2% 0,25W
0,25W	3203	4822 051 10102	1k 2% 0,25W
% 0,25W	3227	4822 051 10151	150Ω 2% 0,25W
% 0,25W	3228	4822 051 10182	1k8 2% 0,25W
0,25W	3300	4822 051 10279	27Ω 2% 0,25W
0,25W	3300	4822 051 10399	39Ω 2% 0,25W
% 0,25W	3300	4822 051 10479	47Ω 2% 0,25W
0,25W			

Jumper

4007	4822 051 10008	0Ω 5% 0,25W
4010	4822 051 10008	0Ω 5% 0,25W

0,25W	5000	4822 157 50961	22µH 10%
0,25W	5001	4822 157 60147	2,2µH
0,1W	5002	4822 157 60147	2,2µH
0,1W	5003	4822 157 60147	2,2µH
0,25W	5004	4822 157 60147	2,2µH
% 0,3W	5005	4822 157 60147	2,2µH
0,25W	5006	4822 157 60147	2,2µH
% 0,25W	5007	4822 157 60147	2,2µH
% 0,25W	5008	4822 157 52403	3,3µH 10%
% 0,3W	5009	4822 157 60147	2,2µH
0,25W	5010	4822 157 52403	3,3µH 10%
% 0,125W	5011	4822 157 60147	2,2µH
% 0,25W	5012	4822 157 52403	3,3µH 10%
% 0,25W	5013	4822 157 60147	2,2µH

	5014	4822 157 52224	15µH 10%
	5015	4822 157 60147	2,2µH
	5016	4822 157 52138	27µH 10%
	5017	4822 157 60147	2,2µH
	5018	4822 157 60147	2,2µH
	5019	4822 157 52403	3,3µH 10%
	5020	4822 157 60147	2,2µH
	5021	4822 157 60147	2,2µH
	5022	4822 157 60498	56µH 10%
	5023	4822 156 11145	1,0µH 6%
	5025	4822 156 11143	4,3µH 6%
	5026	4822 157 60147	2,2µH
	5027	4822 156 11144	3,3µH 6%
	5028	4822 157 60147	2,2µH
	5030	4822 157 63834	3,9µH 10%
	5031	4822 157 63834	3,9µH 10%
	5032	4822 157 63834	3,9µH 10%
	5033	4822 152 20677	10µH 10%
	5034	4822 157 60147	2,2µH
	5035	4822 157 53634	5,6µH 10%

	6000	4822 130 80446	LL4148
	6001	4822 130 80884	LLZ-C5V1
	6002	4822 130 80446	LL4148
	6003	4822 130 82334	BAS85
	6004	4822 130 80446	LL4148
	6005	4822 130 80446	LL4148
	6006	4822 130 31253	BZX55-C2V4
	6007	4822 130 80888	BA682
	6008	4822 130 80888	BA682
	6009	5322 130 80119	BBY40
	6010	5322 130 80119	BBY40
	6013	4822 130 80954	LLZ-C5V6
	6014	4822 130 80446	LL4148

	7000	5322 130 42136	BC848C
	7010	5322 130 42136	BC848C
	7011	5322 130 41983	BC858B
	7012▲	5322 130 41982	BC848B
	7013	4822 130 61207	BC848
	7014	5322 130 41983	BC858B
	7022▲	5322 130 41982	BC848B
	7023	4822 130 42513	BC858C
	7024	5322 130 42012	BC858
	7025	5322 130 41983	BC858B
	7026▲	5322 130 41982	BC848B
	7027	4822 130 61207	BC848
	7029▲	5322 130 41982	BC848B
	7030	4822 130 40938	BC548
	7034	4822 130 42131	BF550
	7035	4822 130 42513	BC858C
	7036	5322 130 42136	BC848C
	7037	4822 130 61207	BC848
	7038	5322 130 42136	BC848C
	7039	5322 130 42136	BC848C
	7040	4822 130 42131	BF550
	7042	5322 130 42136	BC848C
	7060	5322 130 42136	BC848C
	7120	4822 209 31852	PCF83C652P/ AB043
	7201	4822 209 32483	MSM514221A
	7202	4822 209 32483	MSM514221A
	7203	4822 209 32483	MSM514221A
	7204	4822 209 60525	TMS4C1050-3N
	7205	4822 209 60525	TMS4C1050-3N
	7206	4822 209 60525	TMS4C1050-3N
	7207	4822 209 31056	SDA9205-2
	7208	4822 209 31057	UPD65640G-011 -3B9
	7209	4822 209 31059	SAA7158
	7210	4822 209 72042	MC78L05ACP
	7214	4822 209 63645	SAA5231/V7

	7215	4822 209 31851	SAA9042P/A/MOB
	7216	4822 209 63423	TDA2579B/N2
	7217	4822 209 63644	SDA9086-3
	7218	5322 209 61004	N74F74D
	7219	4822 209 63892	UPD91237C/ CE028A
	7221▲	4822 209 83163	LM833N
	7231	4822 209 72042	MC78L05ACP
	7232	4822 209 52359	HYB514256B-70
	7233	4822 209 63893	LH2464-10
	7244	5322 209 61004	N74F74D
	7261	4822 209 72042	MC78L05ACP

PIP panel J

Various

1023	4822 212 30837	PIP multi 28" FL1.14
1023	4822 212 30838	Full PIP multi 32" FL1.14
1023	4822 212 30371	Full PIP 36" FL1.14
1023	4822 212 30839	PIP multi 33" FL1.16
1023	4822 212 30841	PIP multi 25-28" FL1.16
	4822 265 31085	5P female
	4822 265 41328	10P female
	4822 265 20509	2P male grey
	4822 265 20511	2P male blue
	4822 265 30828	5P male brown
	4822 265 30899	5P male black
1155	4822 320 40284	delay line DL711G
1201	4822 242 70304	crystal 8,867 238 MHz
1212	4822 242 70736	crystal 7,159 090 MHz
150	4822 212 23792	PLL panel
1600	4822 210 10392	Tuner UV916E
1610	4822 242 80295	crystal OFWG3962M

	2103	4822 126 10324	33pF 2% 63V
	2105	4822 122 31766	120pF 2% 63V
	2118	4822 122 31775	680pF 2% 63V
	2119	4822 122 31767	150pF 2% 63V
	2120	4822 122 31807	1200pF 2% 63V
	2125	4822 126 11544	22000pF 63V
	2155	4822 122 32862	10nF 80% 50V
	2158	4822 122 32862	10nF 80% 50V
	2160	4822 121 42408	220nF 5% 63V
	2161	4822 121 41854	150nF 5% 63V
	2162	4822 122 31947	100nF 20% 63V
	2171	4822 122 31961	68pF 2% 63V
	2172	4822 126 11175	22pF 5% 50V
	2176	4822 126 11175	22pF 5% 50V
	2177	4822 122 31961	68pF 2% 63V
	2180	4822 122 31768	180pF 2% 63V
	2181	4822 122 31768	180pF 2% 63V
	2185	4822 126 11544	22000pF 63V
	2187	4822 126 11544	22000pF 63V
	2189	4822 122 31746	1000pF 2% 63V
	2196	4822 122 32183	56nF 10% 50V
	2197	4822 122 31385	22pF 50V
	2201	4822 122 31746	1000pF 2% 63V
	2202	4822 125 50045	20pF trim
	2211	4822 122 31746	1000pF 2% 63V
	2212	4822 125 50045	20pF trim
	2220	5322 121 42661	330nF 5% 63V
	2222	4822 122 32542	47nF 10% 63V
	2227	4822 122 31965	220pF 2% 63V
	2227	5322 122 31842	330pF 2% 63V
	2230	4822 124 41578	6,8µF 20% 50V
	2232	5322 124 41431	22µF 20% 35V

	2234	4822 122 33496	100nF 10% 63V
	2235	4822 124 41578	6,8µF 20% 50V
	2238	4822 121 42937	2,7nF 1% 250V
	2239	4822 122 31947	100nF 20% 63V
	2250	4822 121 41738	270nF 5% 63V
	2251	5322 122 31647	1nF 10% 63V
	2255	4822 122 31766	120pF 2% 63V
	2260	4822 122 31947	100nF 20% 63V
	2270	4822 122 31947	100nF 20% 63V
	2330	4822 122 31768	180pF 2% 63V
	2340	4822 124 40433	47µF 20% 25V
	2345	4822 124 40433	47µF 20% 25V
	2350	4822 124 40849	330µF 20% 16V
	2351	4822 124 41643	100µF 20% 16V
	2380	4822 122 32927	220nF +80-20% 50V
	2381	4822 122 32927	220nF +80-20% 50V
	2382	4822 122 32927	220nF +80-20% 50V
	2383	4822 122 32927	220nF +80-20% 50V
	2384	4822 122 32927	220nF +80-20% 50V
	2385	4822 122 32927	220nF +80-20% 50V
	2390	4822 122 31947	100nF 20% 63V
	2391	4822 122 32927	220nF +80-20% 50V
	2395	4822 122 32927	220nF +80-20% 50V
	2397	4822 122 32927	220nF +80-20% 50V
	2399	4822 122 31746	1000pF 2% 63V
	2404	4822 122 31965	220pF 2% 63V
	2405	4822 122 32862	10nF 80% 50V
	2409	4822 122 31965	220pF 2% 63V
	2410	4822 122 32862	10nF 80% 50V
	2413	4822 122 31769	18pF 2% 63V
	2413	4822 122 31765	100pF 2% 63V
	2414	4822 122 32862	10nF 80% 50V
	2415	4822 122 31965	220pF 2% 63V
	2415	4822 122 32765	820pF 2% 63V
	2430	4822 122 31947	100nF 20% 63V
	2432	4822 122 31947	100nF 20% 63V
	2434	4822 122 31947	100nF 20% 63V
	2438	4822 121 41857	10nF 5% 250V
	2439	4822 121 41856	22nF 5% 250V
	2440	4822 122 31965	220pF 2% 63V
	2441	4822 122 31727	470pF 2% 63V
	2442	4822 124 40242	1µF 20% 63V
	2445	5322 122 31842	330pF 2% 63V
	2446	4822 122 31947	100nF 20% 63V
	2447	5322 121 42386	100nF 5% 63V
	2448	4822 122 31947	100nF 20% 63V
	2449	4822 122 31947	100nF 20% 63V
	2450	4822 122 32856	8,2nF 10% 63V
	2451	4822 122 31981	33nF +-0,5pF 50V
	2452	4822 122 31765	100pF 2% 63V
	2453	4822 122 31765	100pF 2% 63V
	2455	4822 122 31972	39pF 2% 63V
	2456	4822 122 31765	100pF 2% 63V
	2459	4822 124 41997	470µF 10V
	2466	4822 122 31947	100nF 20% 63V
	2470	4822 124 40196	220µF 20% 16V
	2604	4822 124 40195	150µF 20% 16V
	2614	4822 124 40433	47µF 20% 25V
	2615	4822 124 41576	2,2µF 20% 50V
	2616	4822 122 32927	220nF +80-20% 50V
	2618	4822 122 32442	10nF 50V
	2619	4822 124 40849	330µF 20% 16V
	2620	4822 122 32442	10nF 50V
	2621	4822 122 31797	22nF 10% 63V
	2622	4822 122 31947	100nF 20% 63V

Spare parts list / Stückliste / Liste des pièces

PIP panel J

2623	4822 122 31797	22nF 10% 63V	
2627	4822 122 32927	220nF +80-20% 50V	
3103	4822 051 10821	820Ω 2% 0,25W	
3104	4822 051 10821	820Ω 2% 0,25W	
3105	4822 051 10362	3k6 2% 0,25W	
3106	4822 116 52233	10k 5% 0,5W	
3107	4822 051 10103	10k 2% 0,25W	
3108	4822 051 10103	10k 2% 0,25W	
3155	4822 051 10391	390Ω 2% 0,25W	
3156	4822 051 10122	1k2 2% 0,25W	
3157	4822 100 11391	330Ω 30% lin	
3158	4822 051 10759	75Ω 2% 0,25W	
3170	4822 051 10112	1k1 2% 0,25W	
3175	4822 051 10621	620Ω 2% 0,25W	
3196	4822 050 11002	1k 1% 0,4W	
3200	4822 051 10103	10k 2% 0,25W	
3201	4822 051 10103	10k 2% 0,25W	
3202	4822 051 10103	10k 2% 0,25W	
3211	4822 051 10103	10k 2% 0,25W	
3212	4822 051 10103	10k 2% 0,25W	
3214	4822 051 10102	1k 2% 0,25W	
3220	4822 051 10512	5k1 2% 0,25W	
3221	4822 116 52233	10k 5% 0,5W	
3222	4822 051 10008	0Ω 5% 0,25W	
3227	4822 116 52299	7k5 5% 0,5W	
3228	4822 051 10472	4k7 2% 0,25W	
3231	4822 051 10302	3k 2% 0,25W	
3232	4822 051 10229	22Ω 2% 0,25W	
3233	4822 051 10112	1k1 2% 0,25W	
3233	4822 051 10152	1k5 2% 0,25W	
3234	4822 051 10202	2k 2% 0,25W	
3235	4822 051 10122	1k2 2% 0,25W	
3235	4822 051 10202	2k 2% 0,25W	
3236	4822 051 10511	510Ω 2% 0,25W	
3237	4822 051 10153	15k 2% 0,25W	
3238	4822 051 10333	33k 2% 0,25W	
3239	4822 100 11319	4k7 30% lin	
3241	4822 051 10302	3k 2% 0,25W	
3242	4822 050 11002	1k 1% 0,4W	
3250	4822 051 10911	910Ω 2% 0,25W	
3265	4822 051 10104	100k 2% 0,25W	
3270	4822 051 10103	10k 2% 0,25W	
3275	4822 051 10103	10k 2% 0,25W	
3276	4822 051 10102	1k 2% 0,25W	
3330	4822 051 10103	10k 2% 0,25W 1)	
3330	4822 051 10473	47k 2% 0,25W	
3332	4822 051 10152	1k5 2% 0,25W 1)	
3335	4822 051 10271	270Ω 2% 0,25W	
3336	4822 051 10472	4k7 2% 0,25W	
3336	4822 051 10682	6k8 2% 0,25W	
3337	4822 050 11002	1k 1% 0,4W	
3337	4822 116 52207	1k2 5% 0,5W	
3338	4822 051 10332	3k3 2% 0,25W	
3340	4822 116 52253	2k 5% 0,5W	
3341▲	4822 052 10129	12Ω 5% 0,33W	
3341▲	4822 111 41424	22Ω 5% 0,3W	
3345▲	4822 111 41424	22Ω 5% 0,3W	
3353▲	4822 052 10568	5Ω6 5% 0,33W	
3354	4822 051 10271	270Ω 2% 0,25W	
3354	4822 051 10331	330Ω 2% 0,25W	
3376	4822 051 10008	0Ω 5% 0,25W	
3376	4822 051 10102	1k 2% 0,25W	
3377	4822 051 10008	0Ω 5% 0,25W	
3377	4822 051 10102	1k 2% 0,25W	
3378	4822 051 10008	0Ω 5% 0,25W	
3378	4822 051 10102	1k 2% 0,25W	
3390	4822 051 10151	150Ω 2% 0,25W	
3391	4822 051 10181	180Ω 2% 0,25W	
3394	4822 051 10151	150Ω 2% 0,25W	
3395	4822 051 10181	180Ω 2% 0,25W	
3396	4822 116 52232	910Ω 5% 0,5W	
3398	4822 051 10151	150Ω 2% 0,25W	
3399	4822 051 10181	180Ω 2% 0,25W	
3404	4822 051 10431	430Ω 2% 0,25W	
3405	4822 051 10271	270Ω 2% 0,25W	
3406	4822 051 10162	1k6 2% 0,25W	
3407	4822 051 10332	3k3 2% 0,25W	
3410	4822 051 10391	390Ω 2% 0,25W	
3411	4822 051 10361	360Ω 2% 0,25W	
3412	4822 051 10391	390Ω 2% 0,25W	
3412	4822 051 10751	750Ω 2% 0,25W	
3414	4822 051 10101	100Ω 2% 0,25W	
3414	4822 051 10181	180Ω 2% 0,25W	
3416	4822 051 10182	1k8 2% 0,25W	
3420	4822 116 52184	18Ω 5% 0,5W	
3434	4822 051 10473	47k 2% 0,25W	
3436	4822 051 10473	47k 2% 0,25W	
3437	4822 051 10101	100Ω 2% 0,25W	
3438	4822 051 10513	51k 2% 0,25W	
3440	4822 116 52222	390Ω 5% 0,5W	
3441	4822 051 10519	51Ω 2% 0,25W	
3442	4822 051 10919	91Ω 2% 0,25W	
3444	4822 116 52175	100Ω 5% 0,5W	
3446	4822 116 52175	100Ω 5% 0,5W	
3448	4822 051 10392	3k9 2% 0,25W	
3450	4822 051 10471	470Ω 2% 0,25W	
3452	4822 051 10471	470Ω 2% 0,25W	
3454	4822 051 10471	470Ω 2% 0,25W	
3460	4822 116 52224	470Ω 5% 0,5W	
3462	4822 051 10333	33k 2% 0,25W	
3463	4822 116 52299	7k5 5% 0,5W	
3464	4822 051 10102	1k 2% 0,25W	
3464	4822 051 10472	4k7 2% 0,25W	
3467	4822 116 52256	2k2 5% 0,5W	
3471	4822 051 10752	7k5 2% 0,25W	
3471	4822 051 10103	10k 2% 0,25W	
3472	4822 051 10224	220k 2% 0,25W	
3473	4822 051 10008	0Ω 5% 0,25W	
3473	4822 051 10102	1k 2% 0,25W	
3474	4822 116 52277	39K 5% 0,5W	
3475	4822 051 10821	820Ω 2% 0,25W	
3476	4822 051 10152	1k5 2% 0,25W	
3600	4822 051 10103	10k 2% 0,25W	
3601	4822 051 10103	10k 2% 0,25W	
3602	4822 051 10101	100Ω 2% 0,25W	
3603	4822 051 10101	100Ω 2% 0,25W	
3604▲	4822 052 10158	1Ω5 5% 0,33W	
3605	4822 051 10223	22k 2% 0,25W	
3610	4822 100 11319	4k7 30% lin	
3611	4822 051 10332	3k3 2% 0,25W	
3612	4822 051 10272	2k7 2% 0,25W	
3613	4822 051 10103	10k 2% 0,25W	
3614	4822 051 10123	12k 2% 0,25W	
3615	4822 051 10822	8k2 2% 0,25W	
3616	4822 116 52229	750Ω 5% 0,5W	
3616	4822 050 11002	1k 1% 0,4W	
3617	4822 051 10751	750Ω 2% 0,25W	
3617	4822 051 10102	1k 2% 0,25W	
3618▲	4822 052 10568	5Ω6 5% 0,33W	
3619	4822 051 10471	470Ω 2% 0,25W	
3620	4822 051 20222	2k2 5% 0,1W	
3621	4822 051 10105	1M 5% 0,25W	
3622	4822 051 10272	2k7 2% 0,25W	
3624	4822 051 10272	2k7 2% 0,25W	
3625	4822 051 10511	510Ω 2% 0,25W	
3630	4822 051 10101	100Ω 2% 0,25W	
3631	4822 051 10101	100Ω 2% 0,25W	
3632	4822 051 10102	1k 2% 0,25W	
3633	4822 051 10104	100k 2% 0,25W	
3633	4822 051 10124	120k 2% 0,25W	
3634	4822 051 10104	100k 2% 0,25W	
3634	4822 051 10124	120k 2% 0,25W	
3635	4822 051 10562	5k6 2% 0,25W	
3636	4822 051 10911	910Ω 2% 0,25W	
3637	4822 051 20183	18k 5% 0,1W	
3638	4822 051 10362	3k6 2% 0,25W	

Jumper

4001	4822 051 10008	0Ω 5% 0,25W
4002	4822 051 10008	0Ω 5% 0,25W
4003	4822 051 10008	0Ω 5% 0,25W
4003	5322 122 31647	1nF 10% 63V
4007	4822 051 10008	0Ω 5% 0,25W
4008	4822 051 10008	0Ω 5% 0,25W
4009	4822 051 10008	0Ω 5% 0,25W
4011	4822 051 10008	0Ω 5% 0,25W
4012	4822 051 10008	0Ω 5% 0,25W
4013	4822 051 10008	0Ω 5% 0,25W
4014	4822 051 10008	0Ω 5% 0,25W
4015	4822 051 10008	0Ω 5% 0,25W
4016	4822 051 10008	0Ω 5% 0,25W
4017	4822 051 10008	0Ω 5% 0,25W
4018	4822 051 10008	0Ω 5% 0,25W
4019	4822 051 10008	0Ω 5% 0,25W
4020	4822 051 10008	0Ω 5% 0,25W
4021	4822 051 10008	0Ω 5% 0,25W
4022	4822 051 10008	0Ω 5% 0,25W
4024	4822 051 10008	0Ω 5% 0,25W
4025	4822 051 10008	0Ω 5% 0,25W
4026	4822 051 10008	0Ω 5% 0,25W
4027	4822 051 10008	0Ω 5% 0,25W
4028	4822 051 10008	0Ω 5% 0,25W
4029	4822 051 10008	0Ω 5% 0,25W 404625W
4415	4822 051 10008	0Ω 5% 0,25W
4417	4822 051 10008	0Ω 5% 0,25W
4418	4822 051 10008	0Ω 5% 0,25W
4419	4822 051 10008	0Ω 5% 0,25W
4420	4822 051 10008	0Ω 5% 0,25W
4421	4822 051 10008	0Ω 5% 0,25W
4631	4822 051 10008	0Ω 5% 0,25W
4632	4822 051 10008	0Ω 5% 0,25W
4633	4822 051 10008	0Ω 5% 0,25W
4634	4822 051 10008	0Ω 5% 0,25W

5118	4822 157 60435	10,3µH 4,86MHz trim	
5155	4822 157 60433	7,2µH 4,4MHz trim	
5157	4822 157 60434	9,4µH 4,4MHz trim	
5170	4822 157 60432	10,3µH 4,4MHz trim	
5175	4822 157 60432	10,3µH 4,4MHz trim	
5190	4822 157 60432	10,3µH 4,4MHz trim	
5400	4822 157 50943	12µH 10%	
5402	4822 157 50943	12µH 10%	
5403	4822 157 52333	100µH 10%	
5406	4822 157 50943	12µH 10%	
5408	4822 157 50943	12µH 10%	
5410	4822 157 50943	12µH 10%	

6300	4822 130 80906	LLZ-C7V5	
6301	4822 130 80446	LL4148	
6464	5322 130 31504	BZX79-B3V3	
6471	4822 130 81227	BZV55-F5V6	
7103	5322 130 41982	BC848B	
7105	5322 130 41982	BC848B	
7125	4822 209 63927	TDA4554/V1	
7200	5322 130 41982	BC848B	
7210	5322 130 41982	BC848B	
7233	5322 130 41982	BC848B	
7234	5322 130 41982	BC848B	
7235	5322 130 41982	BC848B	
7330	5322 130 41982	BC848B	
7335	5322 130 41982	BC848B	
7337	5322 130 41982	BC848B	
7338	5322 130 41982	BC848B	
7350	4822 130 42616	BC818-40	
7380	4822 209 60479	TEA5114A	
7400	5322 130 41983	BC858B	
7402	5322 130 41983	BC858B	
7404	5322 130 41983	BC858B	
7406	4822 209 62473	SDA9087	
7408	4822 209 62474	SDA9088-2WS	
7408	4822 209 32374	SDA9088-2 (16:9)	
7410	4822 209 63644	SDA9086-3	
7466	4822 209 73852	PMBT2369	
7470	4822 130 62844	BD826-16	
7471	4822 130 62846	ON4590	
7472	4822 130 62846	ON4590	
7473	5322 130 41982	BC848B	
7610	4822 209 30393	TDA8349A/N3	
7630	4822 209 30395	SAA1300AQ/N6	
7755	4822 209 63423	TDA2579B/N2	

NICAM sound module K

1600	4822 212 23907	ECO-NICAM PAL BG	
1600	4822 212 23908	ECO-NICAM PAL I	
	4822 265 41087	9P pinstrip	

Various

1001	4822 242 81527	crystal 17,472MHz	
1002	4822 242 72301	filter TH316BOM-20800DAF	
1002	4822 242 72303	filter TH316BQM	
1003	4822 242 81187	crystal 11.700MHz	
1003	4822 242 81188	crystal 13.104MHz	
1106	4822 242 72303	filter TH316BQM	
2000	4822 122 31947	100nF 20% 63V	
2001	4822 124 40433	47µF 20% 25V	
2002	4822 122 31797	22nF 10% 63V	
2003	4822 122 31797	22nF 10% 63V	
2004	4822 122 31768	180pF 2% 63V	
2005	4822 122 31768	180pF 2% 63V	
2006	5322 122 31842	330pF 2% 63V	
2007	4822 122 32597	6,8nF 10% 63V	
2008	4822 122 31767	150pF 2% 63V	
2009▲	4822 122 32442	10nF 50V	
2010	4822 122 31767	150pF 2% 63V	
2011	4822 122 31766	120pF 2% 63V	
2012	4822 121 41854	150nF 5% 63V	
2013	4822 122 31746	1000pF 2% 63V	
2014▲	4822 122 32442	10nF 50V	
2015	4822 125 50045	20pF trim	
2016	4822 122 31961	68pF 2% 63V	
2017	4822 121 42408	220nF 5% 63V	
2018▲	4822 122 32442	10nF 50V	
2019	4822 122 31797	22nF 10% 63V	
2020	4822 124 40433	47µF 20% 25V	
2021	4822 122 31782	15nF 10% 50V	
2021	4822 122 32856	8,2nF 10% 63V	
2022	4822 122 31981	33nF 5% 50V	
2022	4822 122 31759	18nF	
2023	4822 122 31981	33nF 5% 50V	
2023	4822 122 31759	18nF	
2024	4822 122 31782	15nF 10% 50V	
2024	4822 122 32856	8,2nF 10% 63V	
2025	4822 122 31797	22nF 10% 63V	
2026	4822 124 40433	47µF 20% 25V	
2027	4822 122 31773	560pF 2% 63V	
2028	4822 126 10171	2700pF 2% 63V	
2029			
2030			
2031			
2032			
2033			
2034			
2035			
2036▲			
2037▲			
2038			
2039			
2041			
2042			
2043			
2044			
2050			
2051			
2245			
2246			
3000			
3002			
3003			
3004			
3005			
3007			
3008			
3009			
3010			
3011			
3012			
3013			
3014			
3015			
3015			
3016			
3016			
3017			
3017			
3018			
3018			
3019			
3019			
3020			
3021			
3022			
3023			
3024			
3025			
3026			
3027			
3028			
3029▲			
3030			
3031			
3032			
3033			
3034			
3035			
3036			
3037			
3049			
3050			
3099			
3099			

Jumper

4002		
4003		
4005		
4052		
4053		
4054		

Spare parts list / Stückliste / Liste des pièces

2029	4822 122 32999	2,2nF 5% 50V
2030	4822 122 32999	2,2nF 5% 50V
2031	4822 126 10171	2700pF 2% 63V
2032	4822 122 31773	560pF 2% 63V
2033	4822 126 11492	220nF 10% 63V
2034	4822 126 11492	220nF 10% 63V
2035	4822 122 31746	1000pF 2% 63V
2036▲	4822 122 32442	10nF 50V
2037▲	4822 122 32442	10nF 50V
2038	4822 122 31797	22nF 10% 63V
2039	4822 126 11691	150nF 10% 63V
2041	5322 122 31647	1nF 10% 63V
2042	4822 126 10183	330pF 10% 63V
2043	5322 122 31647	1nF 10% 63V
2044	5322 122 31647	1nF 10% 63V
2050	4822 124 40433	47µF 20% 25V
2051	5322 122 31647	1nF 10% 63V
2245	5322 122 31647	1nF 10% 63V
2246	5322 122 31647	1nF 10% 63V

3000	4822 051 10471	470Ω 2% 0,25W
3002	4822 051 10332	3k3 2% 0,25W
3003	4822 051 10332	3k3 2% 0,25W
3004	4822 051 10104	100k 2% 0,25W
3005	4822 051 10823	82k 2% 0,25W
3007	4822 051 10223	22k 2% 0,25W
3008	4822 051 10223	22k 2% 0,25W
3009	4822 051 10392	3k9 2% 0,25W
3010	4822 051 10104	100k 2% 0,25W
3011	4822 051 10104	100k 2% 0,25W
3012	4822 053 20106	10M 5% 0,25W
3013	4822 051 10824	820k 2% 0,25W
3014	4822 051 10103	10k 2% 0,25W
3015	4822 051 10682	6k8 2% 0,25W
3015	4822 051 10123	12k 2% 0,25W
3016	4822 051 10122	1k2 2% 0,25W
3016	4822 051 20222	2k2 5% 0,1W
3017	4822 051 10122	1k2 2% 0,25W
3017	4822 051 20222	2k2 5% 0,1W
3018	4822 051 10682	6k8 2% 0,25W
3018	4822 051 10123	12k 2% 0,25W
3019	4822 051 10752	7k5 2% 0,25W
3019	4822 051 10562	5k6 2% 0,25W
3020	4822 051 10472	4k7 2% 0,25W
3021	4822 051 10472	4k7 2% 0,25W
3022	4822 051 10472	4k7 2% 0,25W
3023	4822 051 10472	4k7 2% 0,25W
3024	4822 051 10184	180k 2% 0,25W
3025	4822 051 10184	180k 2% 0,25W
3026	4822 051 10101	100Ω 2% 0,25W
3027	4822 051 10101	100Ω 2% 0,25W
3028	4822 051 10103	10k 2% 0,25W
3029▲	4822 052 10109	10Ω 5% 0,33W
3030	4822 051 10102	1k 2% 0,25W
3031	4822 051 10102	1k 2% 0,25W
3032	4822 051 10569	56Ω 2% 0,25W
3033	4822 051 20222	2k2 5% 0,1W
3034	4822 051 10431	430Ω 2% 0,25W
3035	4822 051 10241	240Ω 2% 0,25W
3036	4822 051 10102	1k 2% 0,25W
3037	4822 051 10159	15Ω 2% 0,25W
3049	4822 051 10223	22k 2% 0,25W
3050	4822 051 10123	12k 2% 0,25W
3099	4822 051 10101	100Ω 2% 0,25W
3099	4822 051 51201	120Ω 1% 0,125W

Jumper

4002	4822 051 10008	0Ω 5% 0,25W
4003	4822 051 10008	0Ω 5% 0,25W
4005	4822 051 10008	0Ω 5% 0,25W
4052	4822 051 10008	0Ω 5% 0,25W
4053	4822 051 10008	0Ω 5% 0,25W
4054	4822 051 10008	0Ω 5% 0,25W

Jumper

4055	4822 051 10008	0Ω 5% 0,25W
4100	4822 051 10008	0Ω 5% 0,25W

5000	4822 157 50975	1mH 10%
5001	4822 157 50975	1mH 10%
5002	4822 157 70458	4,7µH 10%
5003	4822 157 70458	4,7µH 10%

6000▲	4822 130 30621	1N4148
6005	4822 209 30911	OF4076
6006	5322 130 31684	BB809
6050	4822 130 80446	LL4148

7000	4822 209 30909	TDA8732/C1
7001▲	4822 209 30914	SAA7280/M3
7002▲	4822 209 83163	LM833N
7003▲	4822 209 83163	LM833N
7004	5322 209 10576	4053B
7007	4822 209 73236	TDA1543/N2
7008	5322 130 42755	BC847C
7009	4822 130 60887	BF840
7050	5322 130 42136	BC848C

Y/C detector I

Various

1021	4822 212 23929	Y/C detector panel
	4822 265 40503	5P female gold plated
	4822 265 30431	3P female gold plated
1231	4822 242 80364	filter 4,43MHz

2225▲	4822 124 40196	220µF 20% 16V
2226	4822 122 32927	220nF +80-20% 50V
2228	4822 122 32927	220nF +80-20% 50V
2235	4822 122 31965	220pF 2% 63V
2236	4822 122 31772	47pF 2% 63V
2237	4822 122 32142	270pF 2% 63V
2238	4822 122 31768	180pF 2% 63V
2239	4822 122 31947	100nF 20% 63V
2244	4822 124 20722	1µF 10% 63V
2246	4822 122 31947	100nF 20% 63V
2247	4822 122 31766	120pF 2% 63V
2261	4822 124 20678	47µF 10% 10V
2262	4822 122 31767	150pF 2% 63V
2269	4822 124 20726	4,7µF 10% 63V

3200	4822 050 11002	1k 1% 0,4W
3201	4822 116 83006	2M7 5% 0,5W
3203	4822 051 10563	56k 2% 0,25W
3204	4822 051 10103	10k 2% 0,25W
3212	4822 051 10751	750Ω 2% 0,25W
3213	4822 051 10153	15k 2% 0,25W
3214	4822 051 10153	15k 2% 0,25W
3221	4822 051 10472	4k7 2% 0,25W
3223	4822 116 52203	91Ω 5% 0,5W
3225▲	4822 116 52219	330Ω 5% 0,5W
3226	4822 116 52243	1k5 5% 0,5W
3227	4822 051 10112	1k1 2% 0,25W
3228	4822 051 10474	470k 2% 0,25W
3229	4822 051 10331	330Ω 2% 0,25W
3230	4822 051 10102	1k 2% 0,25W
3231	4822 051 10681	680Ω 2% 0,25W
3236	4822 051 10331	330Ω 2% 0,25W
3250	4822 051 10151	150Ω 2% 0,25W
3258	4822 051 10102	1k 2% 0,25W
3272	4822 051 10471	470Ω 2% 0,25W

3278	4822 051 10472	4k7 2% 0,25W
3280	4822 051 10102	1k 2% 0,25W
3282	4822 051 10103	10k 2% 0,25W
3283	4822 051 10472	4k7 2% 0,25W
3284	4822 051 10102	1k 2% 0,25W
3289	4822 051 10102	1k 2% 0,25W
3302	4822 051 10102	1k 2% 0,25W
3307	4822 051 10474	470k 2% 0,25W
3308	4822 051 10471	470Ω 2% 0,25W
3309▲	4822 051 10008	0Ω 5% 0,25W
3319	4822 051 10102	1k 2% 0,25W
3991	4822 051 10399	39Ω 2% 0,25W

5200	4822 157 62824	7,5µH
5201	4822 157 62824	7,5µH
5202	4822 157 60122	4,7µH 10%

6258	4822 130 80905	LLZ-F5V1

7226	5322 130 41983	BC858B
7228▲	5322 130 41982	BC848B
7262	5322 130 41983	BC858B
7263▲	5322 130 41982	BC848B
7264	4822 130 42353	BFS19
7266	5322 130 42136	BC848C
7267	4822 130 42513	BC858C
7274	5322 130 42136	BC848C
7275	4822 130 42513	BC858C
7276	5322 130 41983	BC858B
7277▲	5322 130 41982	BC848B
7278▲	5322 130 41982	BC848B

ECO-box L'

Connectors

	4822 267 50886	IC socket 18P
	4822 255 40901	IC socket 40P
	4822 265 41328	10P female

Various

1750	4822 212 30887	Eco-box
1064	4822 242 72572	crystal 12 MHz
1162	4822 242 71417	crystal 13,875 000 MHz

2001	4822 122 31768	180pF 2% 63V
2002	4822 122 32504	15pF 2% 63V
2004	4822 122 31768	180pF 2% 63V
2005	4822 122 31971	10pF 2% 63V
2006	4822 122 32765	820pF 2% 63V
2007	4822 122 31768	180pF 2% 63V
2008	4822 122 31971	10pF 2% 63V
2009	4822 122 32765	820pF 2% 63V
2010	4822 124 22347	47µF 20% 50V
2011	4822 122 33496	100nF 10% 63V
2012	4822 124 41643	100µF 20% 16V
2013	4822 122 33496	100nF 10% 63V
2016	4822 122 33496	100nF 10% 63V
2019	4822 122 33496	100nF 10% 63V
2024	4822 122 33496	100nF 10% 63V
2025▲	4822 124 40196	220µF 20% 16V
2026	4822 122 33496	100nF 10% 63V
2027▲	4822 124 40196	220µF 20% 16V
2028	4822 122 33496	100nF 10% 63V
2029	4822 122 33496	100nF 10% 63V
2030	4822 122 33496	100nF 10% 63V
2031	4822 124 40435	10µF 20% 50V
2032	4822 122 33496	100nF 10% 63V
2033	4822 124 40435	10µF 20% 50V

2034	4822 122 33496	100nF 10% 63V
2035▲	4822 124 40196	220µF 20% 16V
2036	4822 124 41643	100µF 20% 16V
2037	4822 122 33496	100nF 10% 63V
2038	4822 122 33496	100nF 10% 63V
2040	4822 122 33496	100nF 10% 63V
2041	4822 122 33496	100nF 10% 63V
2042	4822 122 33496	100nF 10% 63V
2046	4822 122 31765	100pF 2% 63V
2047	4822 122 32139	12pF 2% 63V
2048	4822 122 32142	270pF 2% 63V
2049	4822 122 31772	47pF 2% 63V
2050	4822 122 31971	10pF 2% 63V
2051	4822 122 31767	150pF 2% 63V
2052	4822 122 32083	8,2pF 5% 50V
2053	4822 122 31772	47pF 2% 63V
2055	4822 122 32083	8,2pF 5% 50V
2056	4822 122 31767	150pF 2% 63V
2057	4822 122 31772	47pF 2% 63V
2058	4822 122 33496	100nF 10% 63V
2060	4822 122 33496	100nF 10% 63V
2061	4822 122 33496	100nF 10% 63V
2062	4822 122 33496	100nF 10% 63V
2063	4822 122 33496	100nF 10% 63V
2064	4822 122 31971	10pF 2% 63V
2065	4822 122 31971	10pF 2% 63V
2066	4822 122 33496	100nF 10% 63V
2070	4822 122 31765	100pF 2% 63V
2071	4822 122 31765	100pF 2% 63V
2072	4822 122 31765	100pF 2% 63V
2074	4822 122 31765	100pF 2% 63V
2075	4822 122 31765	100pF 2% 63V
2083	4822 122 33496	100nF 10% 63V
2085	4822 122 31765	100pF 2% 63V
2086	4822 122 31765	100pF 2% 63V
2090	4822 122 33496	100nF 10% 63V
2091	4822 122 33498	2,7nF 10% 63V
2092	4822 122 33496	100nF 10% 63V
2094	4822 122 31765	100pF 2% 63V
2095	4822 122 33496	100nF 10% 63V
2096	4822 122 31644	2,2nF 10% 63V
2097	4822 122 31644	2,2nF 10% 63V
2100	4822 124 41643	100µF 20% 16V
2101	4822 122 33496	100nF 10% 63V
2105	4822 122 33496	100nF 10% 63V
2110	4822 122 31765	100pF 2% 63V
2111	5322 122 31647	1nF 10% 63V
2112	4822 122 31839	82pF 2% 63V
2113	4822 122 33496	100nF 10% 63V
2114	4822 122 33496	100nF 10% 63V
2118	4822 121 42937	2,7nF 1% 250V
2122	4822 122 31765	100pF 2% 63V
2123	4822 122 31772	47pF 2% 63V
2125	4822 122 31746	1000pF 2% 63V
2126	4822 122 31746	1000pF 2% 63V
2127	5322 122 31647	1nF 10% 63V
2128	4822 122 31765	100pF 2% 63V
2140	4822 122 31772	47pF 2% 63V
2141	4822 124 40435	10µF 20% 50V
2142	4822 122 32139	12pF 2% 63V
2145	4822 124 41576	2,2µF 20% 50V
2146	4822 122 32142	270pF 2% 63V
2150	4822 122 33496	100nF 10% 63V
2151	4822 124 41643	100µF 20% 16V
2152	4822 122 31825	27pF 2% 63V
2155	4822 122 32504	15pF 2% 63V
2156	5322 122 31647	1nF 10% 63V
2157	4822 122 31727	470pF 2% 63V
2158	4822 122 31797	22nF 10% 63V
2159	4822 122 32142	270pF 2% 63V
2160	4822 122 31765	100pF 2% 63V
2161	4822 122 32891	68nF 10% 63V
2162	4822 122 32504	15pF 2% 63V
2163▲	4822 122 32442	10nF 50V

Spare parts list / Stückliste / Liste des pièces

2164▲	4822 122 32442	10nF 50V
2165	4822 122 33496	100nF 10% 63V
2166	4822 122 33496	100nF 10% 63V
2167	5322 122 31842	330pF 2% 63V
2168▲	4822 122 32442	10nF 50V
2169	4822 122 33496	100nF 10% 63V
2170	4822 122 33496	100nF 10% 63V
2175	4822 124 41576	2,2µF 20% 50V
2176	4822 122 33496	100nF 10% 63V
2177	4822 124 41997	470µF 10V
2178	4822 122 33496	100nF 10% 63V
2179	5322 122 31647	1nF 10% 63V
2180	4822 122 31772	47pF 2% 63V
2181	4822 122 31772	47pF 2% 63V
2182	4822 122 31772	47pF 2% 63V
2183	4822 122 31772	47pF 2% 63V
2200	4822 122 31772	47pF 2% 63V
2201	4822 122 31765	100pF 2% 63V
2202	4822 122 31772	47pF 2% 63V
2210	4822 124 41643	100µF 20% 16V
2211	4822 122 33496	100nF 10% 63V

3003	4822 051 10109	10Ω 2% 0,25W
3004	4822 051 51201	120Ω 1% 0,125W
3005	4822 051 51201	120Ω 1% 0,125W
3009	4822 051 10181	180Ω 2% 0,25W
3010	4822 051 10681	680Ω 2% 0,25W
3011	4822 051 10821	820Ω 2% 0,25W
3012▲	4822 052 10279	27Ω 5% 0,33W
3013	4822 116 52231	820Ω 5% 0,5W
3014	4822 051 52401	240Ω 1% 0,125W
3015	4822 051 56201	620Ω 1% 0,125W
3016	4822 051 10471	470Ω 2% 0,25W
3017	4822 051 51501	150Ω 1% 0,125W
3018	4822 051 59101	910Ω 1% 0,125W
3019	4822 051 10471	470Ω 2% 0,25W
3024	4822 051 10102	1k 2% 0,25W
3025	4822 051 10162	1k6 2% 0,25W
3026▲	4822 051 10242	2k4 2% 0,25W
3028	4822 051 10209	20Ω 2% 0,25W
3045	4822 051 10479	47Ω 2% 0,25W
3046	4822 051 10221	220Ω 2% 0,25W
3047	4822 051 10339	33Ω 2% 0,25W
3048	4822 051 10221	220Ω 2% 0,25W
3049	4822 051 10339	33Ω 2% 0,25W
3050	4822 051 10102	1k 2% 0,25W
3051	4822 051 10339	33Ω 2% 0,25W
3052	4822 051 52201	220Ω 1% 0,125W
3055	4822 051 10759	75Ω 2% 0,25W
3056	4822 051 53301	330Ω 1% 0,125W
3057	4822 051 53601	360Ω 1% 0,125W
3060	4822 051 10512	5k1 2% 0,25W
3062▲	4822 052 10279	27Ω 5% 0,33W
3070	4822 051 10101	100Ω 2% 0,25W
3071	4822 051 10182	1k8 2% 0,25W
3072	4822 051 10182	1k8 2% 0,25W
3073	4822 116 52233	10k 5% 0,5W
3075	4822 051 10102	1k 2% 0,25W
3078	4822 051 10101	100Ω 2% 0,25W
3080	4822 051 10102	1k 2% 0,25W
3081	4822 051 10471	470Ω 2% 0,25W
3083	4822 116 52175	100Ω 5% 0,5W
3085	4822 051 10101	100Ω 2% 0,25W
3086	4822 051 10101	100Ω 2% 0,25W
3087	4822 051 10229	22Ω 2% 0,25W
3088	4822 051 10101	100Ω 2% 0,25W
3091	4822 051 10109	10Ω 2% 0,25W
3092	4822 051 10622	6k2 2% 0,25W
3093	4822 051 10511	510Ω 2% 0,25W
3095	4822 051 10562	5k6 2% 0,25W
3096	4822 051 20222	2k2 5% 0,1W
3097	4822 051 10102	1k 2% 0,25W
3098	4822 051 10102	1k 2% 0,25W
3099	4822 051 52701	270Ω 1% 0,125W
3100▲	4822 052 10159	15Ω 5% 0,33W
3103	4822 051 10102	1k 2% 0,25W
3104	4822 051 10104	100k 2% 0,25W
3105	4822 051 10561	560Ω 2% 0,25W
3106	4822 051 10683	68k 2% 0,25W
3110	4822 051 10162	1k6 2% 0,25W
3111	4822 051 10102	1k 2% 0,25W
3112	4822 051 20222	2k2 5% 0,1W
3114	4822 051 10122	1k2 2% 0,25W
3116	4822 051 10562	5k6 2% 0,25W
3117	4822 051 10229	22Ω 2% 0,25W
3118	4822 051 10333	33k 2% 0,25W
3119	4822 100 20166	10k 30% LIN
3120	4822 051 10153	15k 2% 0,25W
3121	4822 051 10152	1k5 2% 0,25W
3122	4822 051 10272	2k7 2% 0,25W
3123	4822 051 10101	100Ω 2% 0,25W
3124	4822 051 10272	2k7 2% 0,25W
3125	4822 051 20222	2k2 5% 0,1W
3126	4822 051 10102	1k 2% 0,25W
3127	4822 051 10113	11k 2% 0,25W
3128	4822 051 10153	15k 2% 0,25W
3130	4822 051 10683	68k 2% 0,25W
3131	4822 100 20166	10k 30% LIN
3132	4822 051 10102	1k 2% 0,25W
3134	4822 051 10152	1k5 2% 0,25W
3136	4822 051 10153	15k 2% 0,25W
3137	4822 051 10153	15k 2% 0,25W
3140	4822 051 10181	180Ω 2% 0,25W
3141	4822 051 10473	47k 2% 0,25W
3142	4822 051 10102	1k 2% 0,25W
3143	4822 051 10683	68k 2% 0,25W
3144	4822 051 20222	2k2 5% 0,1W
3145	4822 051 10221	220Ω 2% 0,25W
3146	4822 051 10681	680Ω 2% 0,25W
3147	4822 051 10221	220Ω 2% 0,25W
3149	4822 051 10272	2k7 2% 0,25W
3150▲	4822 116 81193	15Ω 5% 0,3W
3151	4822 051 10101	100Ω 2% 0,25W
3153▲	4822 051 10008	0Ω 5% 0,25W
3154	4822 116 52256	2k2 5% 0,5W
3155	4822 051 20222	2k2 5% 0,1W
3156	4822 051 10473	47k 2% 0,25W
3157	4822 051 10473	47k 2% 0,25W
3158	4822 051 10101	100Ω 2% 0,25W
3159	4822 051 10569	56Ω 2% 0,25W
3160	4822 116 81783	1M5 5% 0,5W
3161	4822 051 10101	100Ω 2% 0,25W
3165▲	4822 052 10279	27Ω 5% 0,33W
3168	4822 051 10513	51k 2% 0,25W
3178	4822 051 10132	1k3 2% 0,25W
3180	4822 051 10561	560Ω 2% 0,25W
3181	4822 051 10561	560Ω 2% 0,25W
3182	4822 051 10561	560Ω 2% 0,25W
3183	4822 051 10759	75Ω 2% 0,25W
3201	4822 051 10101	100Ω 2% 0,25W

Jumper

4001▲	4822 051 10008	0Ω 5% 0,25W

5001	4822 157 53001	27µH 10%
5002	4822 157 53001	27µH 10%
5004	4822 157 53066	15µH 10%
5007	4822 157 53066	15µH 10%
5011	4822 152 20677	10µH 10%
5012	4822 152 20677	10µH 10%
5025	4822 157 60147	2,2µH
5026	4822 157 60147	2,2µH
5034	4822 157 60147	2,2µH
5035	4822 157 60147	2,2µH
5036	4822 157 60147	2,2µH
5040	4822 157 60147	2,2µH
5041	4822 157 60147	2,2µH
5042	4822 157 60147	2,2µH
5047	4822 157 62552	2,2µH
5049	4822 157 60122	1,5µH 20%
5052	4822 157 60122	1,5µH 20%
5054	4822 157 60122	1,5µH 20%
5063	4822 157 60147	2,2µH
5066	4822 157 60147	2,2µH
5079	4822 152 20677	10µH 10%
5083	4822 157 60147	2,2µH
5146	4822 157 53001	27µH 10%
5152	4822 157 52224	15µH 10%
5169	4822 157 60147	2,2µH
5170	4822 157 60147	2,2µH
5177	4822 157 60147	2,2µH

6001	4822 130 80446	LL4148
6003	4822 130 80446	LL4148
6004	4822 130 80446	LL4148
6006	4822 130 82334	BAS85
6025	4822 130 80446	LL4148
6026	4822 130 80905	BZV55-F5V1
6080	4822 130 81511	LLZ-C3V6
6122	4822 130 80884	LLZ-C5V1
6127	4822 130 80446	LL4148

7010	4822 130 42131	BF550
7011	4822 130 42513	BC858C
7016▲	5322 130 41982	BC848B
7019▲	5322 130 41982	BC848B
7020	4822 130 42513	BC858C
7021▲	5322 130 41982	BC848B
7022	5322 130 42136	BC848C
7023	4822 130 40938	BC548
7025	5322 130 42136	BC848C
7030	5322 130 44743	BSR12
7031	5322 130 44743	BSR12
7032▲	5322 130 41982	BC848B
7034▲	5322 130 41982	BC848B
7035	5322 130 41983	BC858B
7036	5322 130 41983	BC858B
7037▲	5322 130 41982	BC848B
7074▲	5322 130 41982	BC848B
7077▲	5322 130 41982	BC848B
7080▲	5322 130 41982	BC848B
7122▲	5322 130 41982	BC848B
7125	5322 130 41983	BC858B
7127	5322 130 41983	BC858B
7142	5322 130 41983	BC858B
7143▲	5322 130 41982	BC848B
7148▲	5322 130 41982	BC848B
7200	4822 209 30402	TDA2579B/N2/S1
7201	5322 209 31799	PC74HC4538T
7201	5322 209 31799	PC74HC4538T
7203▲	4822 209 83163	LM833N
7231	4822 209 31056	SDA9205-2
7240	4822 209 52418	TMS4C1070B-30N
7241	4822 209 52418	TMS4C1070B-30N
7242	4822 209 52418	TMS4C1070B-30N
7245	4822 209 32581	SAA4970T/V1
7250	4822 209 63645	SAA5231/V7
7260	4822 209 72042	MC78L05ACP
7262	5322 209 31799	PC74HC4538T
7265	4822 209 72042	MC78L05ACP
7266	4822 209 63644	SDA9086-3
7269	5322 209 61004	N74F74D
7271	4822 209 52359	HYB514256B-70
7275	4822 209 31851	SAA9042P/A/MOB
7283	4822 209 52422	Eprom+ software